

# Networked Control Systems (ME-427) - Exercise session 4

Prof. G. Ferrari Trecate

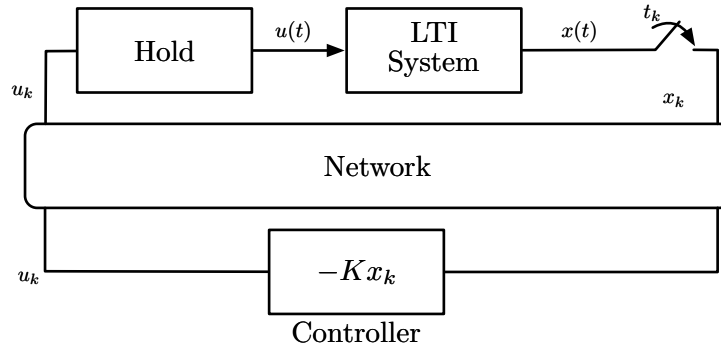


Figure 1: Networked control system

1. **Nonuniform sampling intervals.** Consider the NCS in figure 1, where the LTI system and the sampler are given by

$$\begin{aligned} \dot{x} &= \bar{A}x + \bar{B}u \\ x_k &= x(t_k) \end{aligned} \quad (1)$$

The MAC protocol can produce time-varying sampling intervals  $T_k = t_{k+1} - t_k$ . We will analyze the effect of nonuniform sampling on stability. The discrete-time model of the system is

$$x_{k+1} = A_k x + B_k u, \quad (2)$$

where  $A_k = e^{\bar{A}T_k}$ ,  $B_k = \Gamma(T_k)\bar{B}$ , and  $\Gamma(t) = \int_0^t e^{\bar{A}s} ds$ . Hence, the closed-loop NCS model is

$$x_{k+1} = (A_k - B_k K)x_k \quad (3)$$

- (a) Consider  $\bar{A} = \begin{bmatrix} 1 & 3 \\ 2 & 1 \end{bmatrix}$ ,  $\bar{B} = \begin{bmatrix} 1 \\ 0.6 \end{bmatrix}$ ,  $K = [1 \ 6]$ , and assume  $T_k \in \{h_1, h_2\}$ ,  $h_1 = 0.18$ ,  $h_2 = 0.54$ .

- i. Using MatLab, check the stability of (3) for uniform sampling intervals  $T_k = h_1$  and  $T_k = h_2, \forall k \geq 0$ .

**Hint:**  $e^{At}$  is `expm(A*T)` in Matlab. Similarly  $\Gamma(T)$  is obtained as  
`Gamma = (@(X) (expm(A*X)));`  
`GammaT = integral(Gamma, 0, T, 'ArrayValued', true);`

- ii. Using the periodic sequence

$$T_k = \begin{cases} h_1 & \text{if } k \text{ is even} \\ h_2 & \text{if } k \text{ is odd} \end{cases}$$

simulate the system for  $k = 0, 1, \dots, 100$  from  $x_0 = [1 \ 1]^T$ . Analyze asymptotic stability by studying the model relating  $x_k$  to  $x_{k+2}$ ,  $k = 0, 2, 4, \dots$

- (b) Consider  $\bar{A} = \begin{bmatrix} 0 & 1 \\ -2 & 0.1 \end{bmatrix}$ ,  $\bar{B} = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$ ,  $K = -[1 \ 0]$  and assume  $T_k \in \{h_3, h_4\}$ ,  $h_3 = 3.950$ ,  $h_4 = 2.126$ .

- i. Check instability of (3) for uniform sampling intervals  $T_k = h_3$  and  $T_k = h_4, \forall k \geq 0$
- ii. Using the periodic sequence

$$T_k = \begin{cases} h_3 & \text{if } k \text{ is even} \\ h_4 & \text{if } k \text{ is odd} \end{cases}$$

simulate the system for  $k = 0, 1, \dots, 40$  from  $x_0 = [1 \ 1]^T$ . Analyze asymptotic stability studying the model relating  $x_k$  to  $x_{k+2}$ ,  $k = 0, 2, 4, \dots$

- (c) From points (1a) and (1b) check which of the following statements about the matrix  $A = A_1 \cdot A_2$ , where  $A_1, A_2 \in \mathbb{R}^{n \times n}$  are true
  - i. If  $A_1$  and  $A_2$  are Schur, then  $A$  is Schur.
  - ii. If  $A_1$  and  $A_2$  are not Schur, then  $A$  cannot be Schur.
- (d) Considering the setting in point (1b), find a Lyapunov function  $V(x) = x^T P x$  for the discrete-time NCS model relating  $x_k$  to  $x_{k+2}$ , **for  $k$  odd**. Is  $V(x_k)$ ,  $k = 0, 1, \dots$ , monotonically decreasing, at least for  $k$  large enough? Is this property necessary for the asymptotic stability of the NCS?

**Hint:** In MatLab, use the command `dlvap` for solving a Lyapunov equation and compute  $P$ . Then, plot the values  $V(x_k)$  obtained using the states  $x_k$ ,  $k = 0, 1, \dots$  simulated in point (1b).

2. **Review of pole placement.** Consider the autonomous LTI system

$$\begin{aligned} \dot{x}_1 &= 2x_1 + 3x_2 + u \\ \dot{x}_2 &= -x_1 + 4x_2 \end{aligned}$$

- (a) Discretize it with sampling period  $T = 0.01$  seconds so as to obtain the system

$$\begin{bmatrix} x_1 \\ x_2 \end{bmatrix} (k+1) = \hat{A} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} (k) + \hat{B}u(k) \quad . \quad (4)$$

- (b) Design the state-feedback controller  $u(k) = -Kx(k)$  so that the closed-loop dynamics has eigenvalues in  $\{0.3, 0.8\}$ .

**Hint:** Use the command `'place'` for computing  $K$ . Type `'help place'` to learn how it works.