

Geomechanics


LECTURE 4

PLASTICITY


Dr. ALESSIO FERRARI

Laboratory of soil mechanics - Fall 2024

30.09.2024

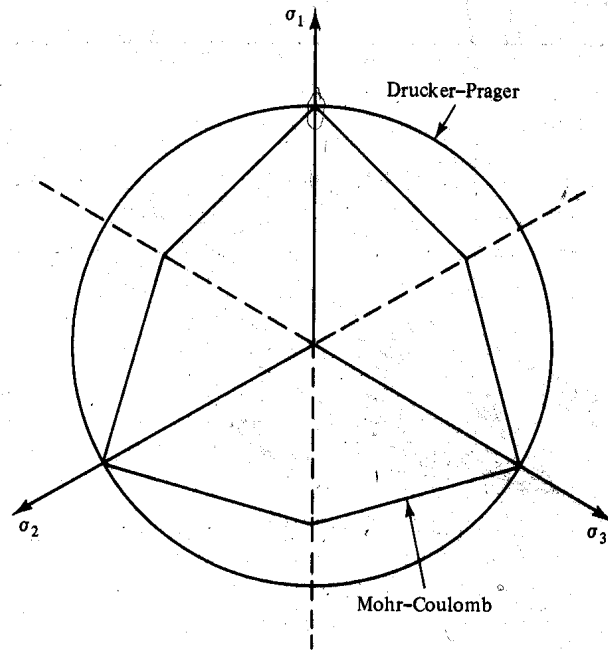

Access the QUIZ

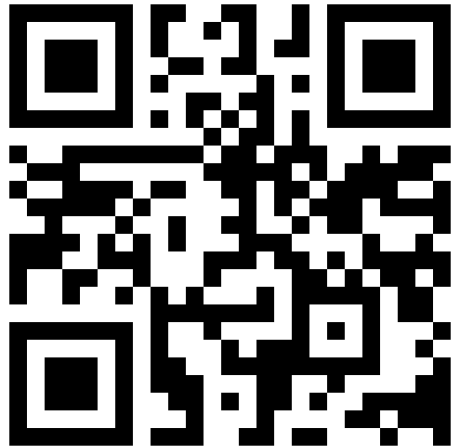

<https://etc.ch/JCTW>

Basic concepts

Elasticity - Linear &
Non-linearPlasticity
Perfect-plasticityHardening elasto-
plasticityCritical state
conceptClassical
constitutive frameworkModified
Cam-ClayAdvanced constitutive
modelsUnsaturated
behaviorTHM behaviour of
geomaterials

Bio-cementation

Time-dependent
behaviour

Practical aspects

Geomechanics in
PracticeNumerical
modelling

In-situ stress

Retaining
structures

Site visit

Course Project

Topics

Content

- Plasticity principle & failure criteria
- Elastic-perfectly plastic models:
 - Von Mises
 - Drucker-Prager
 - Mohr-Coulomb
- Application of elastic-perfectly plastic models
- Conclusion


Plasticity principle & failure criteria

PLASTICITY

YIELD CRITERIA

Plasticity – generalities



- Plasticity - simple definition: irreversible deformation

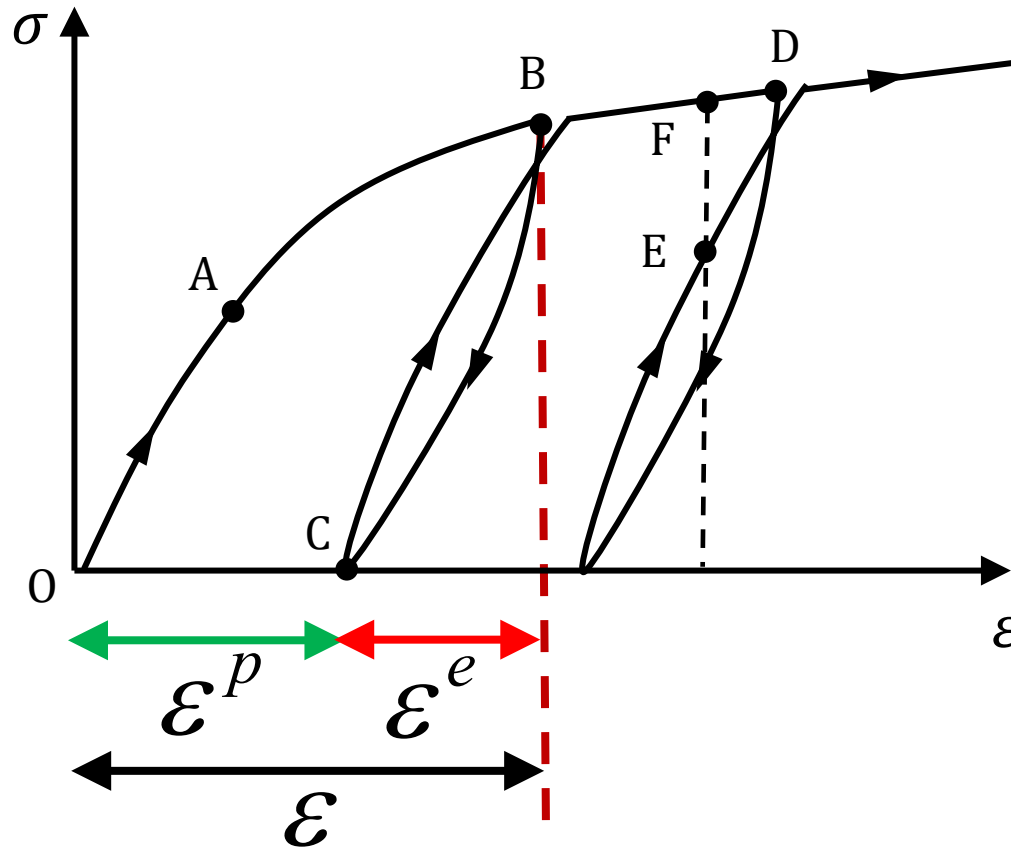

$$\epsilon = \epsilon^e + \epsilon^p$$


Plasticity – generalities

- Strain state depends not only on the actual stress state but also on the stress history
- Need to refer to incremental loading

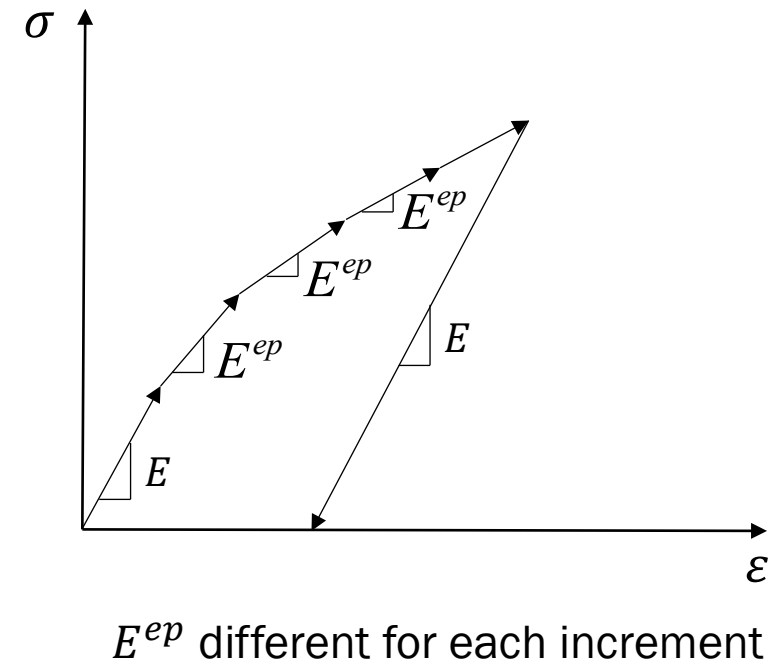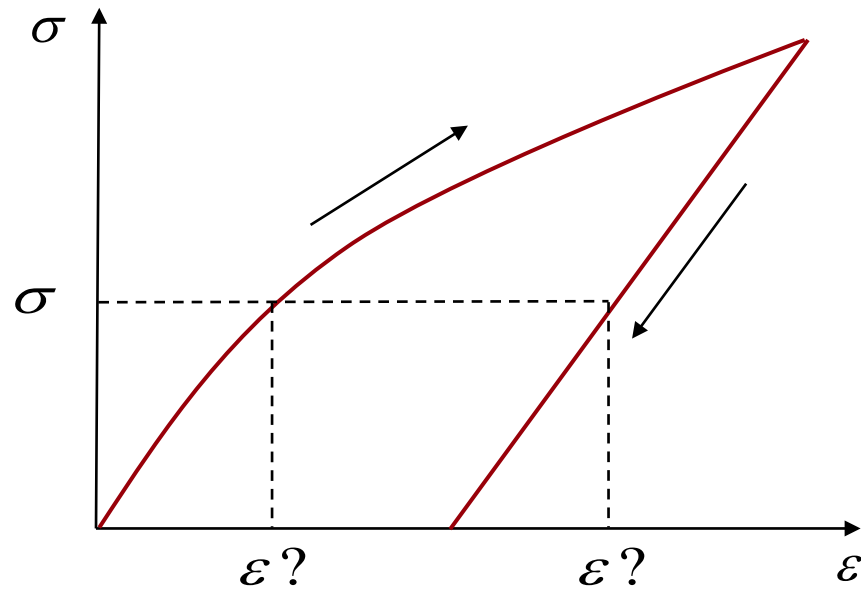

Plasticity – generalities

- Analysis of loading increments

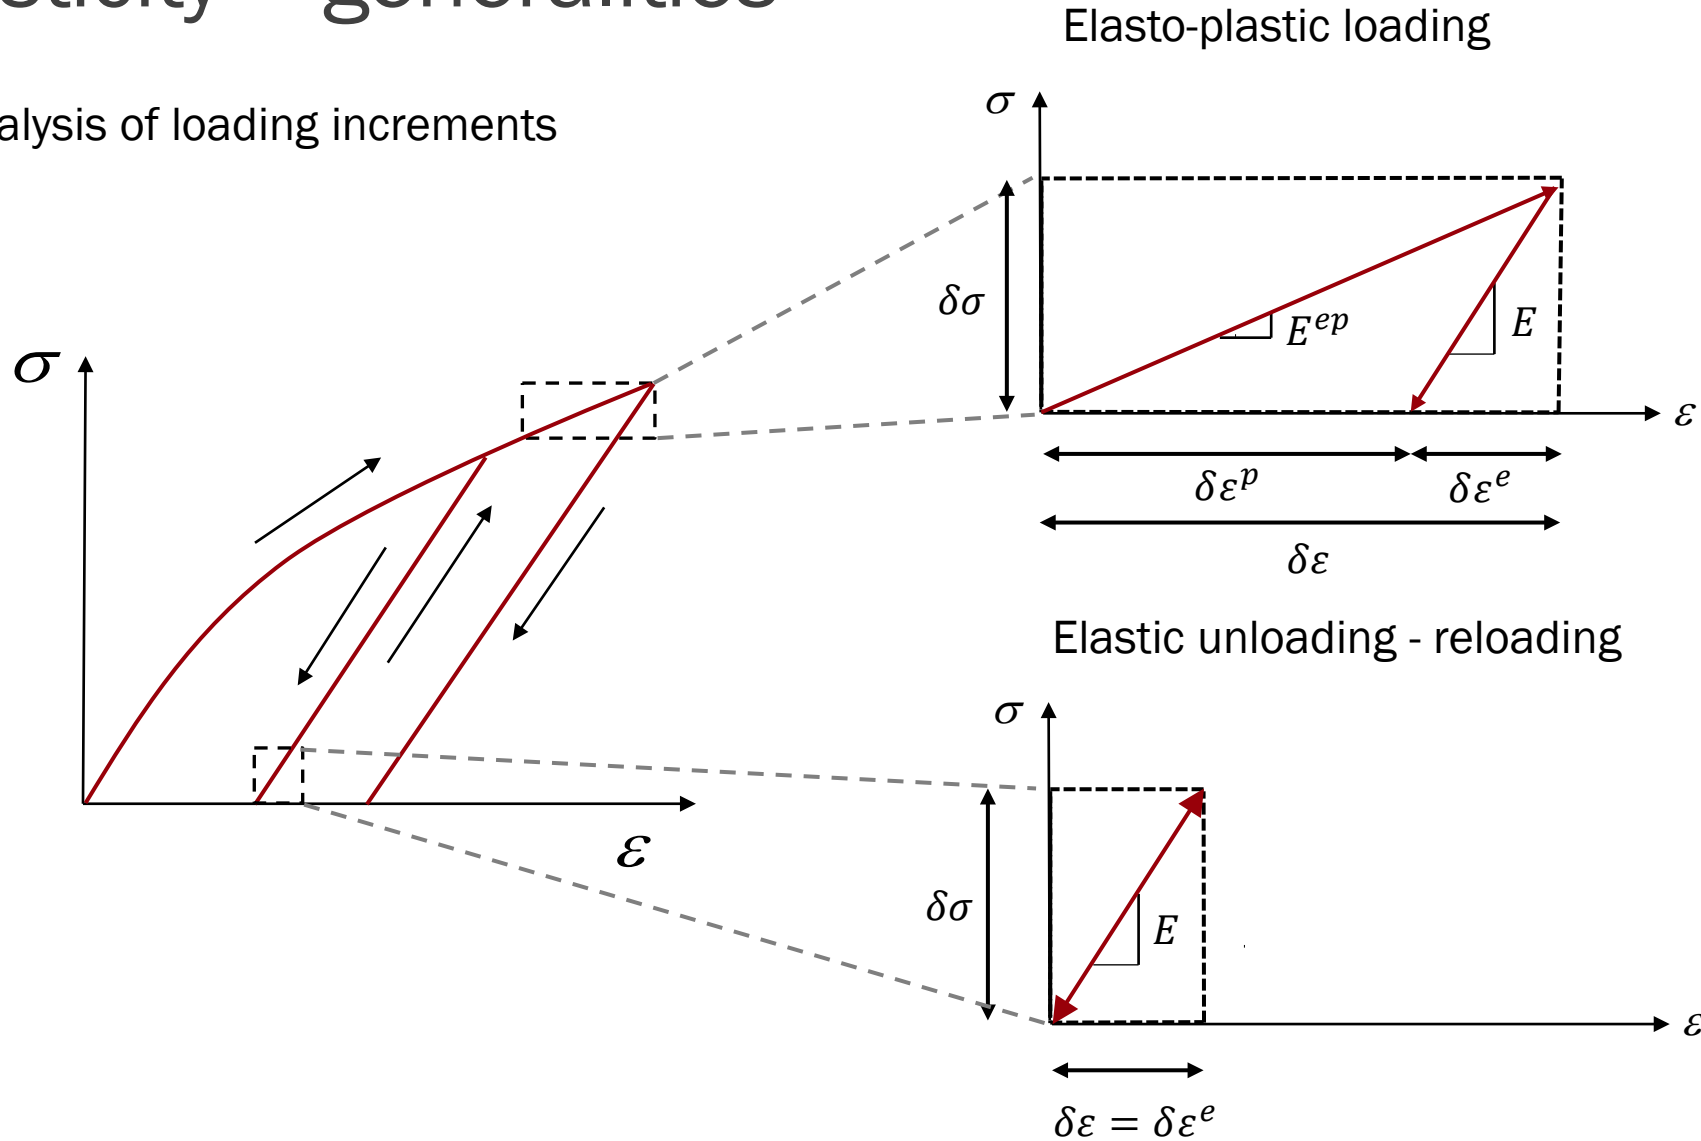

$$\begin{aligned} \delta\sigma &= E^{ep} \delta\varepsilon \\ \delta\varepsilon &= \delta\varepsilon^e + \delta\varepsilon^p \\ \delta\varepsilon^e &= \frac{\delta\sigma}{E} \\ \varepsilon^e &= \frac{\sigma}{E} \end{aligned}$$


$$\begin{aligned} \delta\varepsilon &= \delta\varepsilon^e \\ \delta\sigma &= E \delta\varepsilon^e \\ \delta\varepsilon^e &= \frac{\delta\sigma}{E} \\ \varepsilon^e &= \frac{\sigma}{E} \end{aligned}$$

Physical causes of plastic deformation


Particle rearrangement



Particle crushing

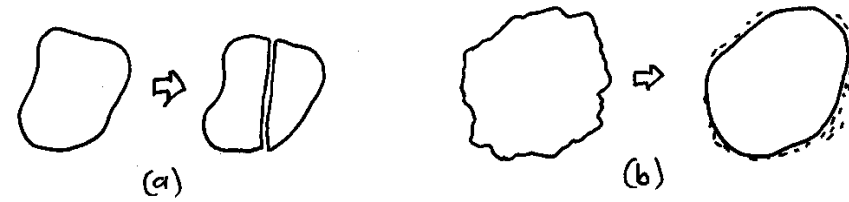

Sliding along the joints or micro-fracturing (rock)

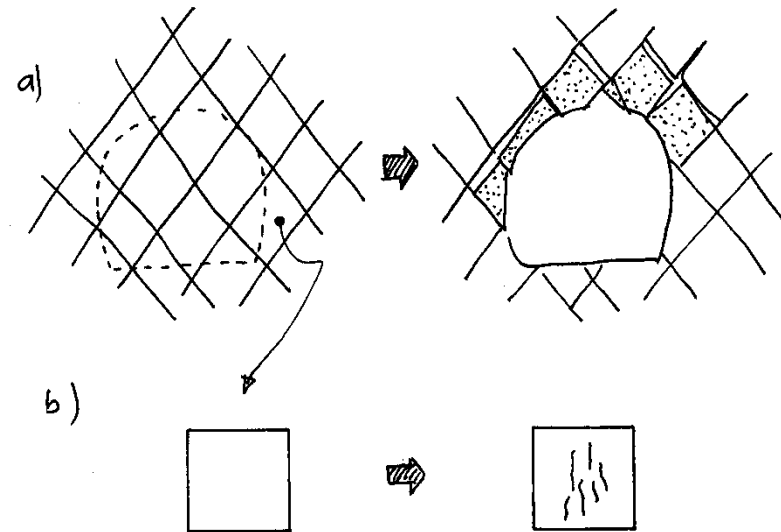

Basic ingredients

1. Decomposition of strains

$$\delta \varepsilon_{ij} = \delta \varepsilon_{ij}^e + \delta \varepsilon_{ij}^p$$

$$\delta \varepsilon_i = \delta \varepsilon_i^e + \delta \varepsilon_i^p$$

Six independent components of elastic and six independent components of plastic strain increments

2. Direct link between effective stress and elastic strain

$$\delta \sigma'_i = D_{ij}^e \delta \varepsilon_j^e$$

$$\sigma'_{ij} = D_{ijhk}^e \varepsilon_{hk}^e$$

$$\sigma'_i = D_{ij}^e \varepsilon_j^e$$

The elastic constitutive tensor/matrix needs to be defined

Basic ingredients

3. Definition of the yield function: a set of mathematical condition for yielding

$$F(\sigma_{ij}, p_k)$$

p_k is a collection of parameters

In terms of stress components

$$F = F(\sigma_{11}, \sigma_{22}, \sigma_{33}, \sigma_{12}, \sigma_{13}, \sigma_{23}, p_k)$$

In terms of principal stresses (isotropic material)

$$F = F(\sigma_1, \sigma_2, \sigma_3, p_k)$$

In terms of triaxial stress variables

$$F = F(p', q, p_k)$$

Basic ingredients

The yield function becomes a yield surface:

$$F(\sigma_{ij}, p_k) = 0$$

which is used to express the limit of the elastic region.

F must be defined in order to ensure the following conditions:

$F(\sigma_{ij}, p_k) < 0$ if the stress point stays inside the surface

$F(\sigma_{ij}, p_k) = 0$ if the stress point stays on the surface

$F(\sigma_{ij}, p_k) > 0$ expresses an impossible condition

Basic ingredients

Example of a yield function/surface in 1D stress state

The yield function is given directly by the maximum allowed stress σ_c .

Yield function


$$F(\sigma_{ij}, p_k)$$

Yield surface

$$F(\sigma_{ij}, p_k) = 0$$

$$F = \sigma - \sigma_c = 0$$

- If $\sigma < \sigma_c \rightarrow F < 0$ elastic behaviour
- If $\sigma = \sigma_c \rightarrow F = 0$ now accumulation of plastic strain
- If $\sigma > \sigma_c \rightarrow F > 0$ impossible

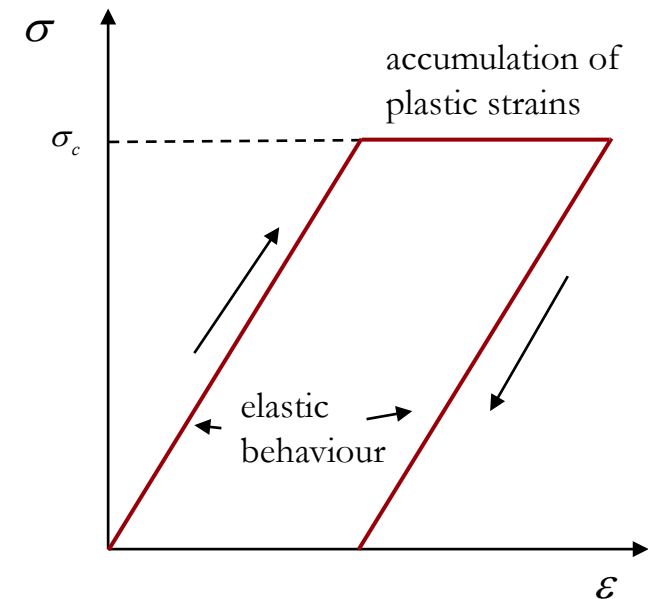

Basic ingredients


Example of a yield function/surface in 2D stress state

The yield surface is assumed to be a circle of radius $r = 2$, centered in the origin in the σ_1, σ_2 plane.

$$F(\sigma_{ij}, p_k) = 0 \rightarrow F(\sigma_1, \sigma_2, r) = 0 \quad (\sigma_1)^2 + (\sigma_2)^2 - r^2 = 0 \rightarrow (\sigma_1)^2 + (\sigma_2)^2 - 4 = 0$$


- In the center point O:

$F = -4 < 0$ elastic behaviour

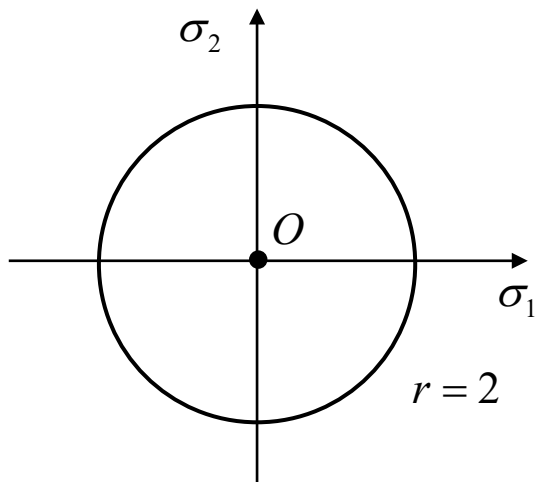


- For each point of the red path:

$F < 0$ elastic behaviour

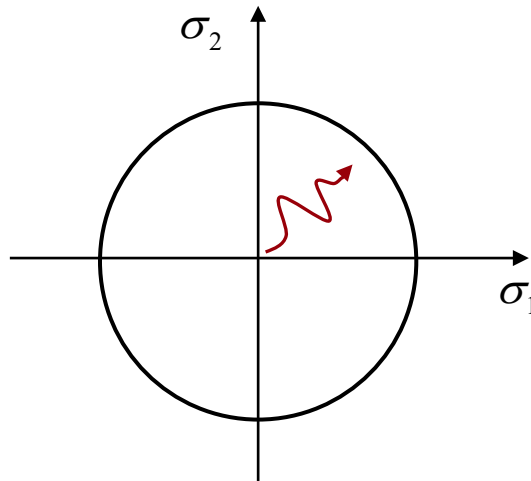

- For the point A:

$F(A) = 0$ plastic strain accumulation

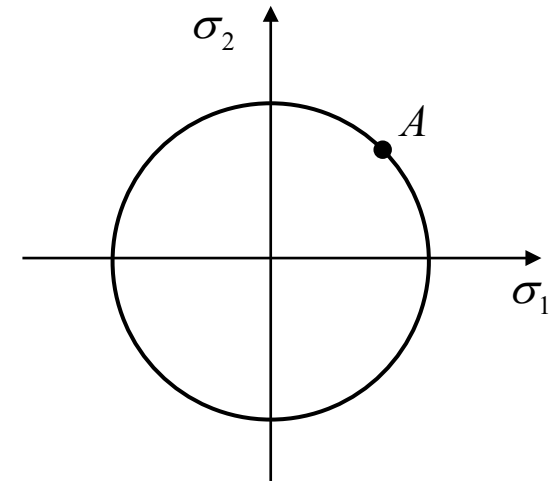


Basic ingredients

4. Definition of the **plastic potential** $g(\sigma_{ij}, r_k)$

r_k is a collection of geometrical parameters

g is defined so that the components of plastic strain increments can be computed as:

$$\delta \varepsilon_{ij}^p = \mu \frac{\partial g}{\partial \sigma_{ij}} \quad \delta \varepsilon_i^p = \mu \frac{\partial g}{\partial \sigma_i}$$

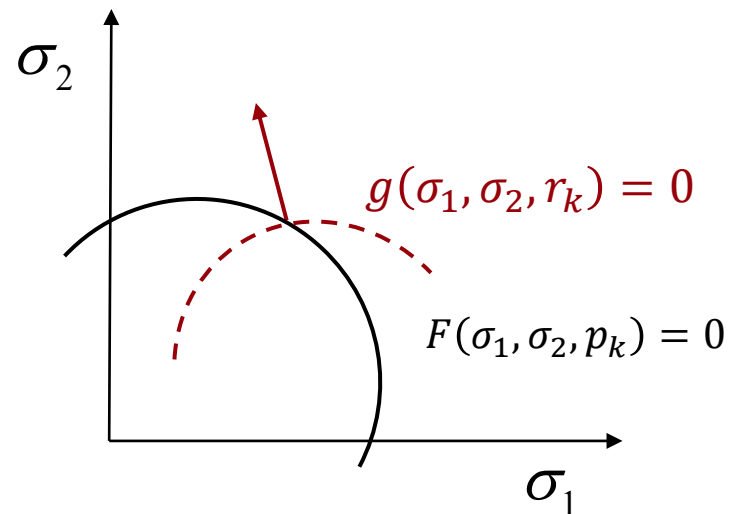

This expression is called the **flow rule**

The plastic deformation vector becomes the gradient of the surface $g=0$.

μ (or often called λ) is the plastic multiplier and it will become the unknown in the elasto-plastic formulation to be solved (see consistency equation after).

If we assume $g = F$ the plasticity is called **associated plasticity**.

Consistency Condition

For a point on F:

$$F(\sigma_i, p_k) = 0$$


When the behaviour is not elastic, also the final position of the increment must stay on F:

$$F(\sigma_i + \delta\sigma_i, p_k + \delta p_k) = 0$$

Two possibilities:


1. Stress path stays on F

F doesn't evolve: no change in p_k

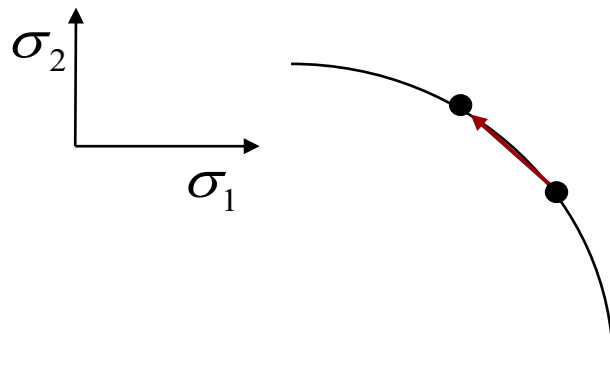

2. Stress path is allowed to exceed F

F has to evolve to accommodate the final position of the stress path: changes in p_k

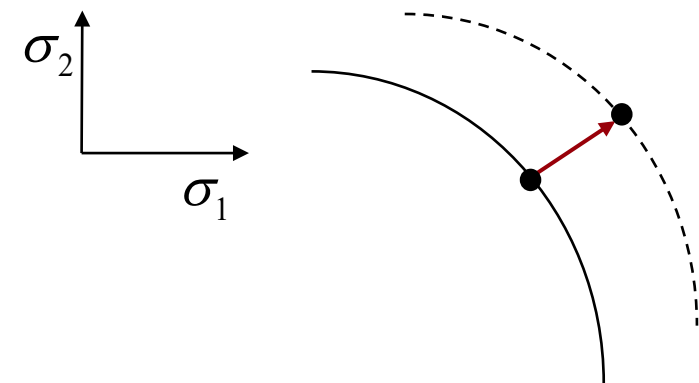

Consistency Condition

In both cases (1) and (2):

$$F(\sigma_i, p_k) = 0$$



And:

$$F(\sigma_i + \delta\sigma_i, p_k + \delta p_k) = 0$$

Hence:

$$dF = \left. \frac{\partial F}{\partial \sigma_i} \right|_{p_k} \delta\sigma_i + \left. \frac{\partial F}{\partial p_k} \right|_{\sigma_i} \delta p_k = 0$$

- $\left. \frac{\partial F}{\partial \sigma_i} \right|_{p_k}$ is the gradient of F;
- $\left. \frac{\partial F}{\partial \sigma_i} \right|_{p_k} \delta\sigma_i$ is a scalar product.

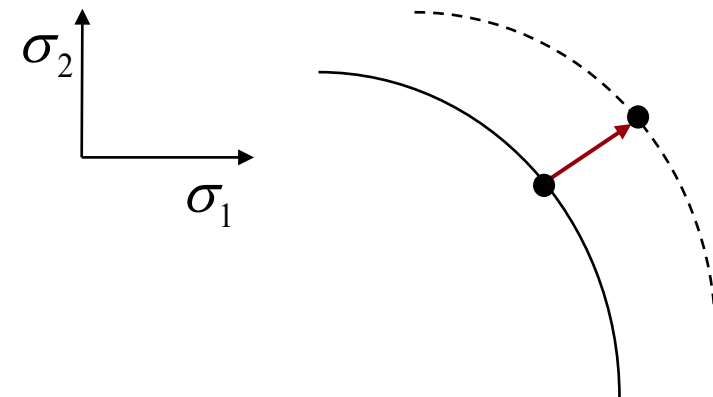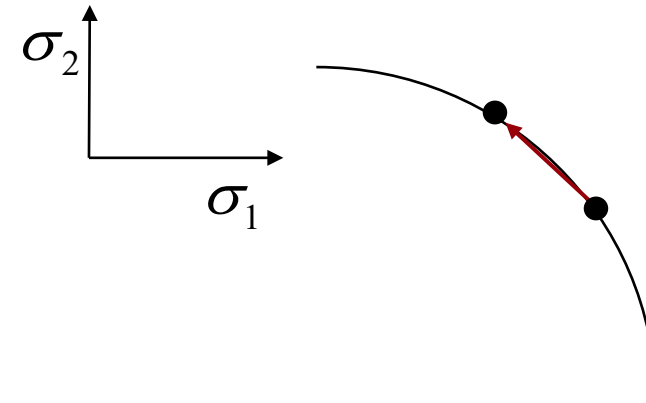

Perfect plasticity

- For perfect plasticity, F is fixed by definition

$$\delta p_k = 0 \rightarrow dF = \frac{\partial F}{\partial \sigma_i} \delta \sigma_i = 0$$

- Solution of the elasto-plastic problem for perfect plasticity

$$\delta \sigma_i = D_{ij}^e \delta \varepsilon_j^e = D_{ij}^e (\delta \varepsilon_j - \delta \varepsilon_j^p) = D_{ij}^e \delta \varepsilon_j - \mu D_{ij}^e \frac{\partial g}{\partial \sigma_j}$$

- Consistency equation

$$\frac{\partial F}{\partial \sigma_i} \left(D_{ij}^e \delta \varepsilon_j - \mu D_{ij}^e \frac{\partial g}{\partial \sigma_j} \right) = 0 \rightarrow \mu = \frac{\frac{\partial F}{\partial \sigma_i} D_{ij}^e \delta \varepsilon_j}{\frac{\partial F}{\partial \sigma_i} D_{ij}^e \frac{\partial g}{\partial \sigma_j}}$$

$$\delta \sigma_i = \left(D_{ij}^e - \frac{D_{ij}^e \frac{\partial g}{\partial \sigma_j} \frac{\partial F}{\partial \sigma_i} D_{ij}^e}{\frac{\partial F}{\partial \sigma_i} D_{ij}^e \frac{\partial g}{\partial \sigma_j}} \right) \delta \varepsilon_j$$

Invariants of stress tensor

Decomposition of stress tensor

$$\sigma_{ij} = s_{ij} + p\delta_{ij}$$


s_{ij} is the **Deviatoric stress tensor**
 p is the **Mean pressure**
 δ_{ij} is the **Spherical stress tensor**

$$p = \frac{1}{3} \cdot \sigma_{nn} = \frac{\sigma_1 + \sigma_2 + \sigma_3}{3}$$

$$\begin{bmatrix} \sigma_{11} & \sigma_{12} & \sigma_{13} \\ \sigma_{12} & \sigma_{22} & \sigma_{23} \\ \sigma_{13} & \sigma_{23} & \sigma_{33} \end{bmatrix} = \begin{bmatrix} s_{11} & \sigma_{12} & \sigma_{13} \\ \sigma_{12} & s_{22} & \sigma_{23} \\ \sigma_{13} & \sigma_{23} & s_{33} \end{bmatrix} + \begin{bmatrix} \frac{\sigma_{nn}}{3} & 0 & 0 \\ 0 & \frac{\sigma_{nn}}{3} & 0 \\ 0 & 0 & \frac{\sigma_{nn}}{3} \end{bmatrix}$$

Triaxial stress

$$\sigma_{ij} = \begin{bmatrix} \sigma_1 & 0 & 0 \\ 0 & \sigma_3 & 0 \\ 0 & 0 & \sigma_3 \end{bmatrix}$$

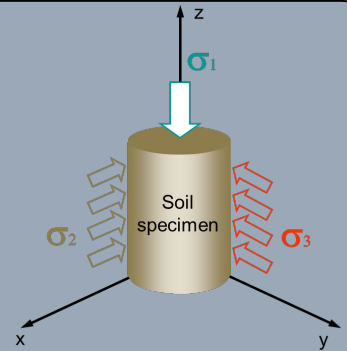

Mean stress:

$$p = \frac{\sigma_1 + \sigma_2 + \sigma_3}{3}$$

Deviatoric stress:


$$q = \sigma_1 - \sigma_3$$

$$p = \frac{J_1}{3}$$

$$q = \sqrt{3 \cdot J_{2D}}$$

General principal stresses

$$\sigma_{ij} = \begin{bmatrix} \sigma_1 & 0 & 0 \\ 0 & \sigma_2 & 0 \\ 0 & 0 & \sigma_3 \end{bmatrix}$$

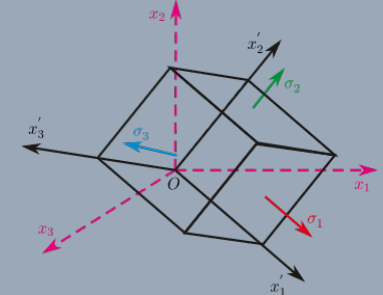


1st invariant of stress tensor: $J_1 = \sigma_1 + \sigma_2 + \sigma_3$

2nd invariant of deviatoric stress tensor:

$$J_{2D} = \frac{1}{6} \cdot [(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_1 - \sigma_3)^2]$$

Haigh-Westergaard stress space


- A three-dimensional space where the principal directions have been selected as the coordinate axes

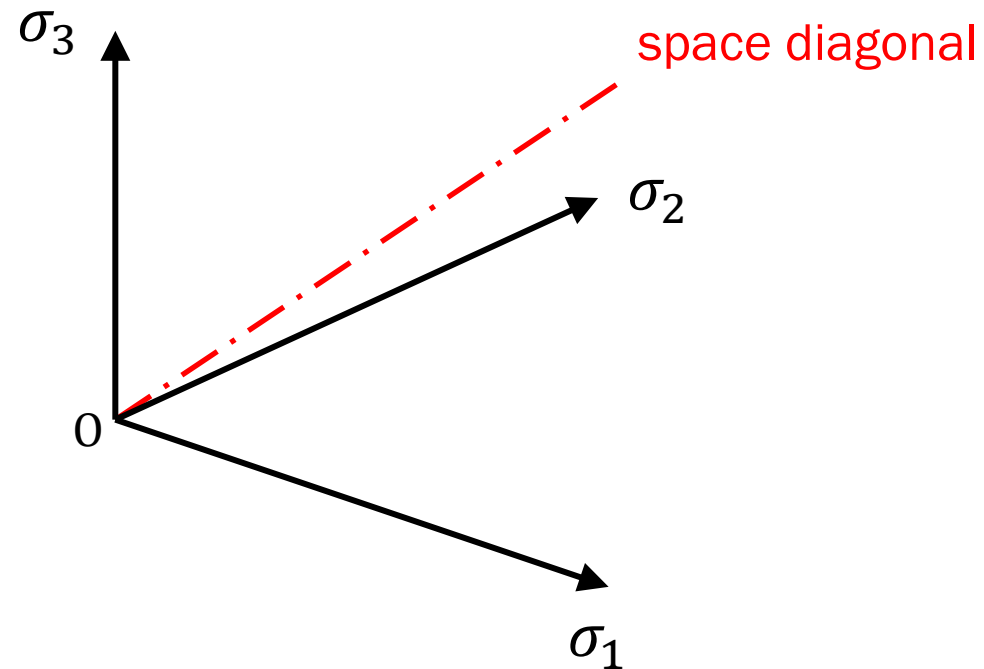

- Along the space diagonal

$$\sigma_1 = \sigma_2 = \sigma_3 = \frac{J_1}{3}$$

Octahedral and π -plane

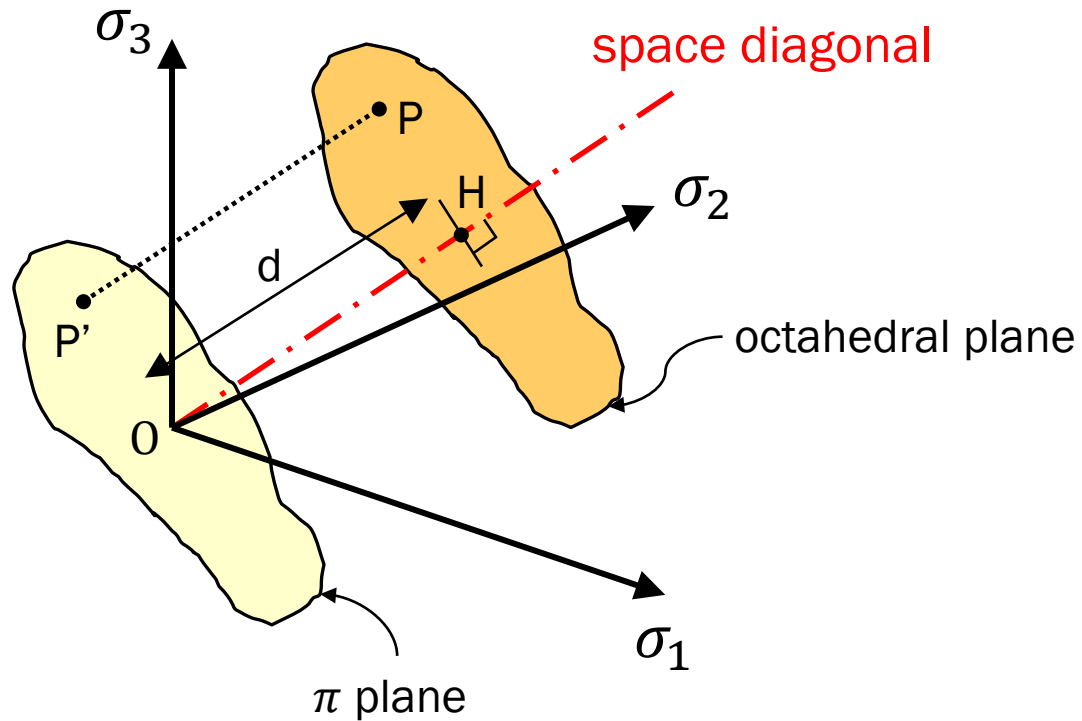

- It can be seen that:
 - On these planes spherical stress is constant
 - and it is proportional to distance from origin, so it is zero on P-plane
- We will use these planes in rupture criteria in plasticity

Elastic-perfectly plastic models

VON MISES


DRUCKER-PRAGER

MOHR-COULOMB

Elastic-perfectly plastic model

Elastic-perfectly plastic is a bilinear approximation defined by yield limit:

(Perfect plasticity: full plasticity without evolution, i.e., Horizontal linear part in stress-strain plot)

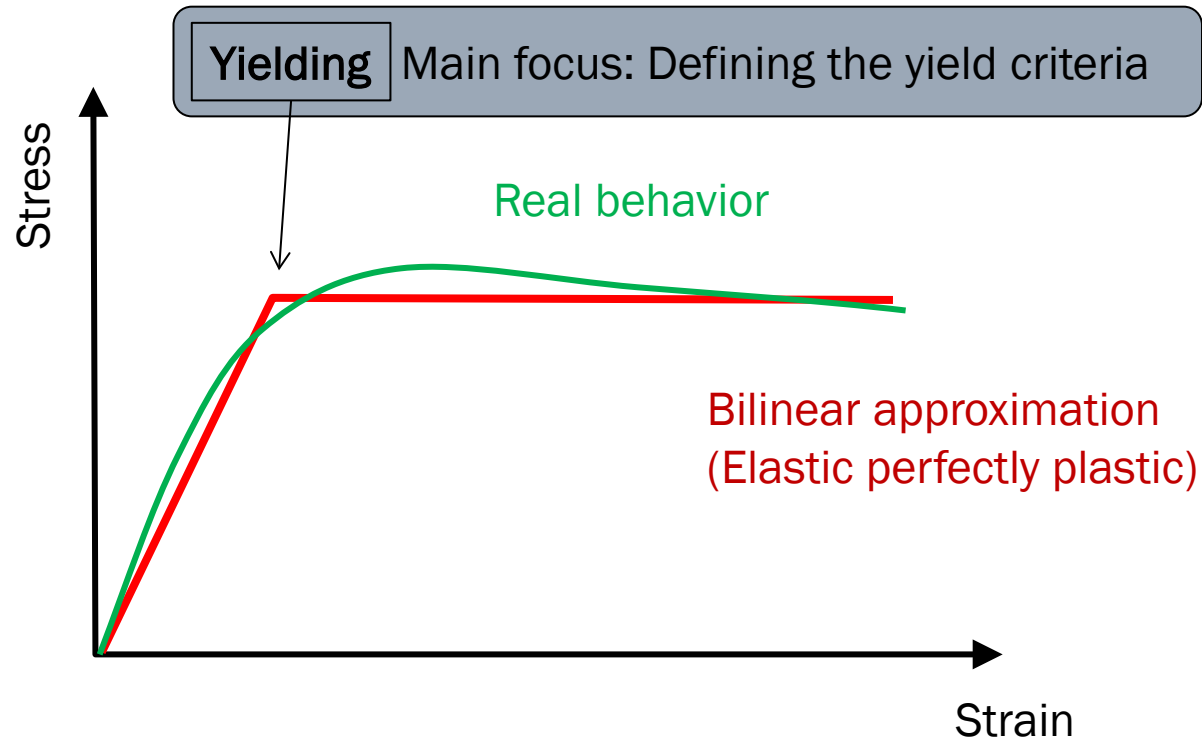

- Pre-yield behaviour : Elasticity
- **Yield limit** – to be defined
- Post-yield behaviour: Perfect plasticity


Von Mises criterion

- Initially developed for metals
- Yield function - **Independent of spheric stress**


$$F = J_{2D} - k^2$$

Material parameter

$$F = \frac{1}{6} \cdot [(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2] - k^2 = 0$$

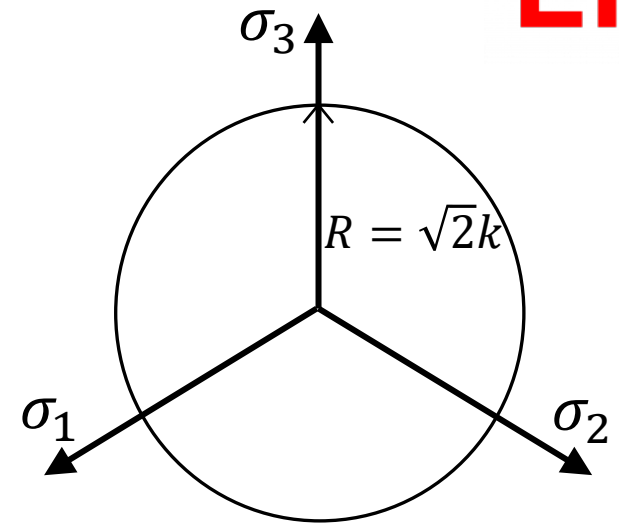

Π plane

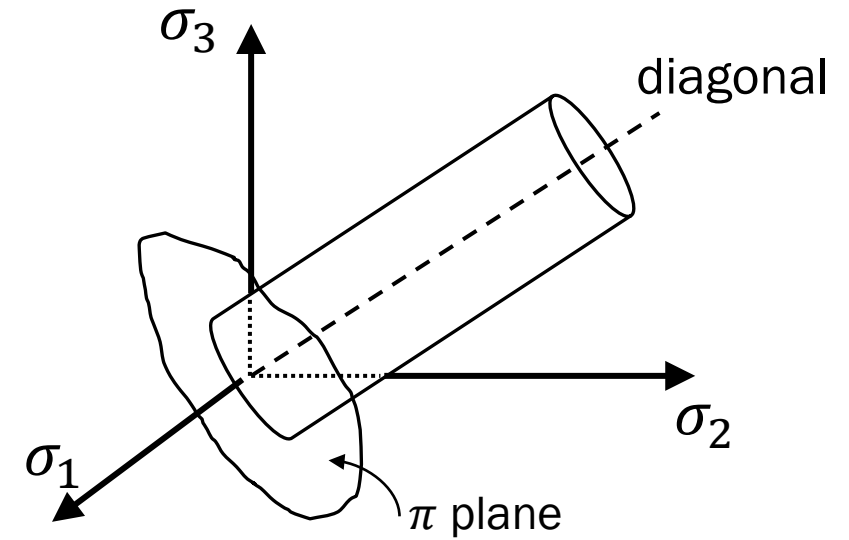

Haigh Westergaard space

Von Mises criterion: Triaxial CTC test

$$\frac{1}{6} \cdot \left[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2 \right] - k^2 = 0$$


Triaxial CTC test: $\sigma_2 = \sigma_3$

$$\frac{1}{6} \cdot \left[2 \cdot (\sigma_1 - \sigma_3)^2 \right] - k^2 = 0$$

$$\frac{1}{3} \cdot q_f^2 - k^2 = 0$$

$$k = \frac{1}{\sqrt{3}} \cdot q_f$$

Material parameter

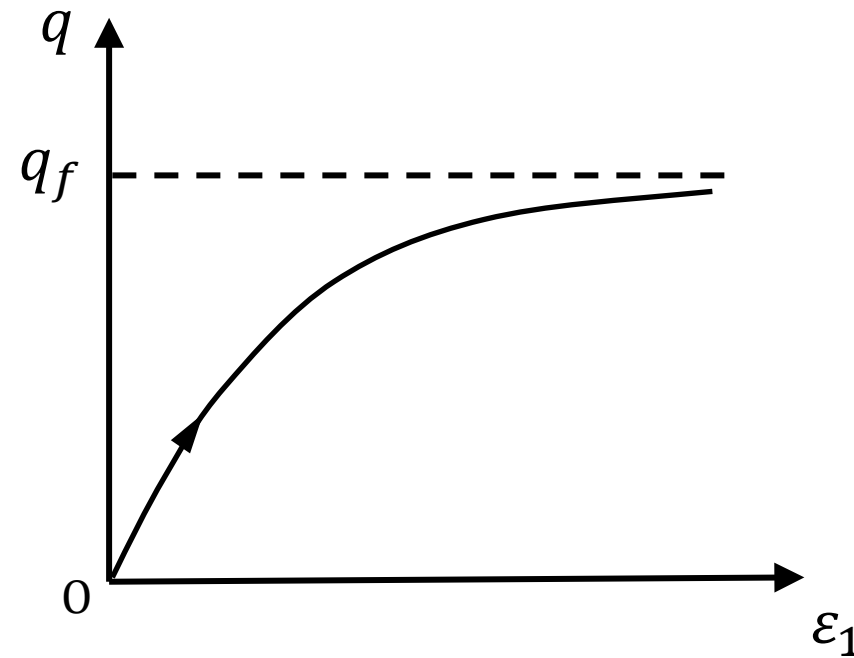


Von Mises criterion: Triaxial CTC test

Limitations of the Von Mises criterion for geomaterials:

$$k = \frac{1}{\sqrt{3}} \cdot q_f$$

- Three CTC tests carried out at different initial mean effective stress p' will result in three different q_f and three different values of k
- In other words, the Von Mises criterion cannot reproduce the stress-dependent shear strength typical of geomaterials
- The only case when the strength is considered as independent from the confining stress is when the undrained cohesion is used.


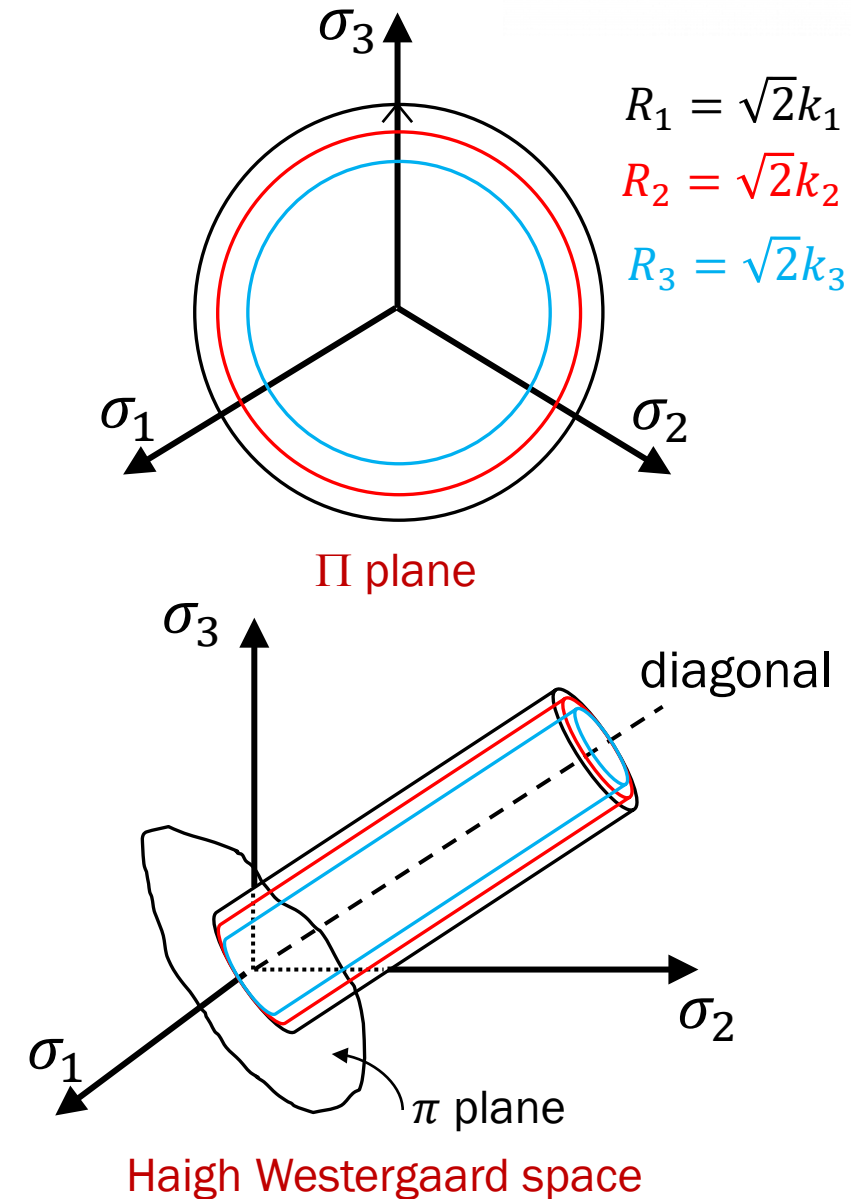


Von Mises criterion: link to classical soil mechanics

Undrained- Unconsolidated triaxial test (UU) on saturated clay

Undrained shear strength $c_u = \tau_{\max} = \frac{1}{2} \cdot (\sigma_1 - \sigma_3)_f = \frac{1}{2} \cdot q_f$

Material parameter $k = \frac{2}{\sqrt{3}} \cdot c_u$

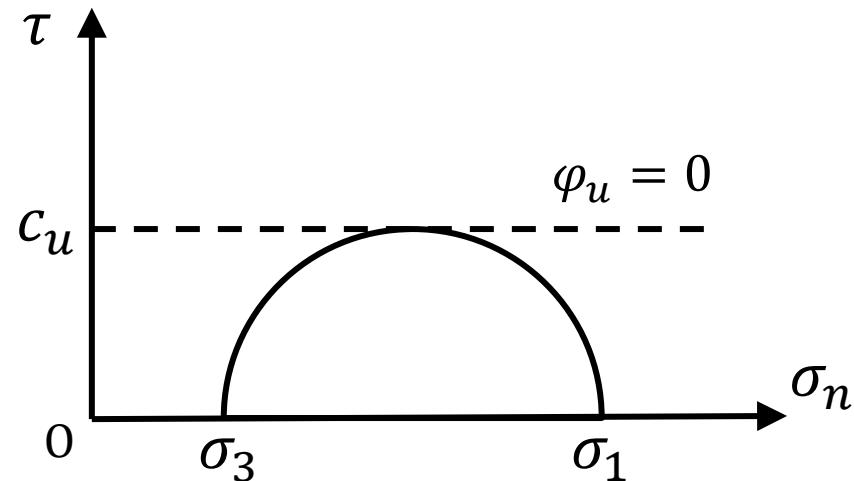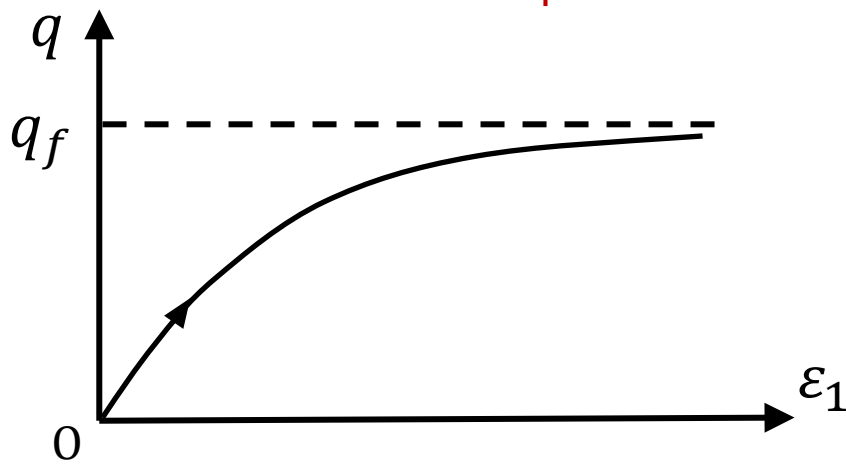



Drucker-Prager criterion

- Improvement of Von Mises for geomaterials
- Yield function - **Dependent on spheric stress**

Material parameters

$$F = \sqrt{J_{2D}} - \alpha \cdot J_1 - k$$

$$\sqrt{\frac{1}{6} \cdot [(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2]} - \alpha \cdot (\sigma_1 + \sigma_2 + \sigma_3) - k = 0$$

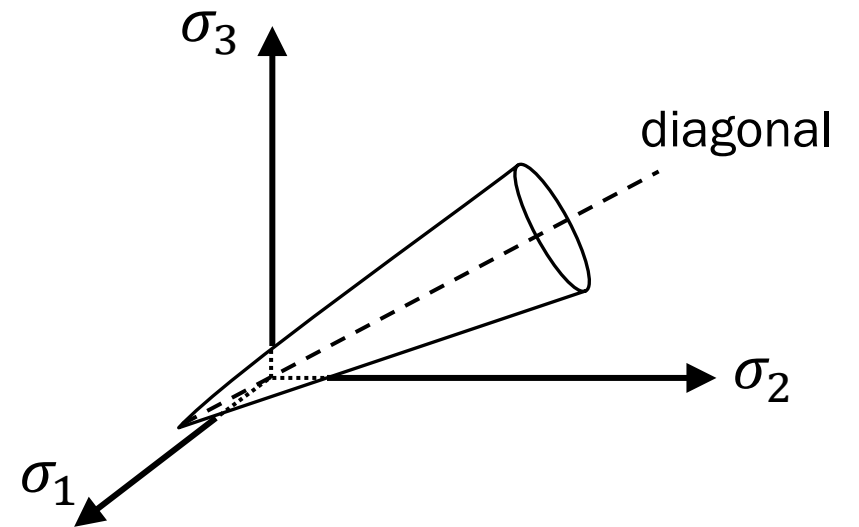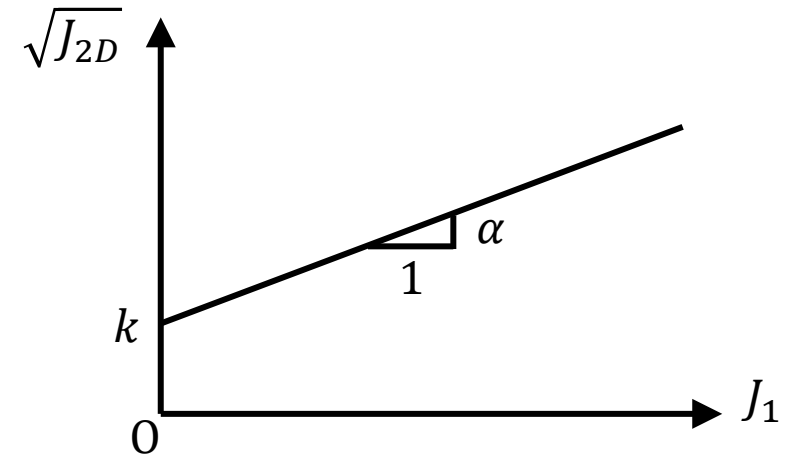

Haigh-Westergaard space

Drucker-Prager criterion: Triaxial CTC test

$$\sqrt{\frac{1}{6} \cdot [(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2]} - \alpha \cdot (\sigma_1 + \sigma_2 + \sigma_3) - k = 0$$


Triaxial CTC test: $\sigma_2 = \sigma_3$

$$\frac{1}{\sqrt{3}} \cdot (\sigma_1 - \sigma_3) - \alpha \cdot (\sigma_1 + 2 \cdot \sigma_3) - k = 0$$

$$\frac{1}{\sqrt{3}} \cdot q - 3 \cdot \alpha \cdot p - k = 0$$

$$q = 3 \cdot \sqrt{3} \cdot \alpha \cdot p + \sqrt{3} \cdot k$$

Material parameters

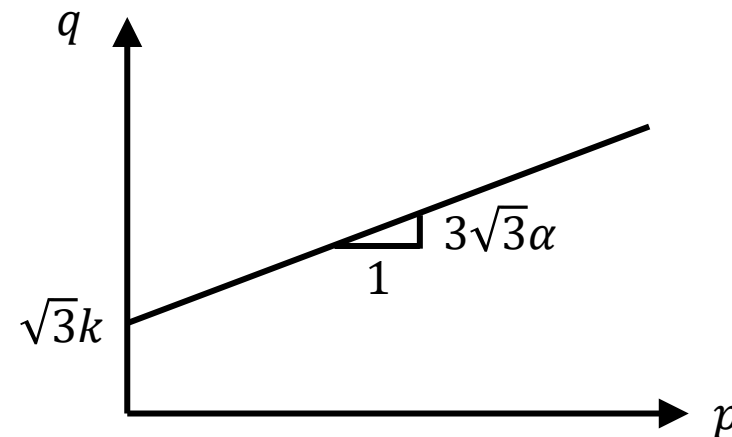

Drucker-Prager criterion: link to classical soil mechanics

Drucker-Prager parameters can be adjusted to the soil mechanics parameters “Cohesion” and “friction angle” on Mohr circle plane

$$\alpha = \frac{2 \cdot \sin \phi}{\sqrt{3} \cdot (3 - \sin \phi)}$$

$$k = \frac{6 \cdot c \cdot \cos \phi}{\sqrt{3} \cdot (3 - \sin \phi)}$$

Mohr-Coulomb criterion: soil mechanics

- Developed for geomaterials
- Mohr-Coulomb shear strength in soil mechanics


Max. shear stress at failure

Normal effective stress

$$\tau_f = c' + \sigma_n' \operatorname{tg} \varphi'$$

Material parameter: Intercept Cohesion

Material parameter: Effective Friction angle

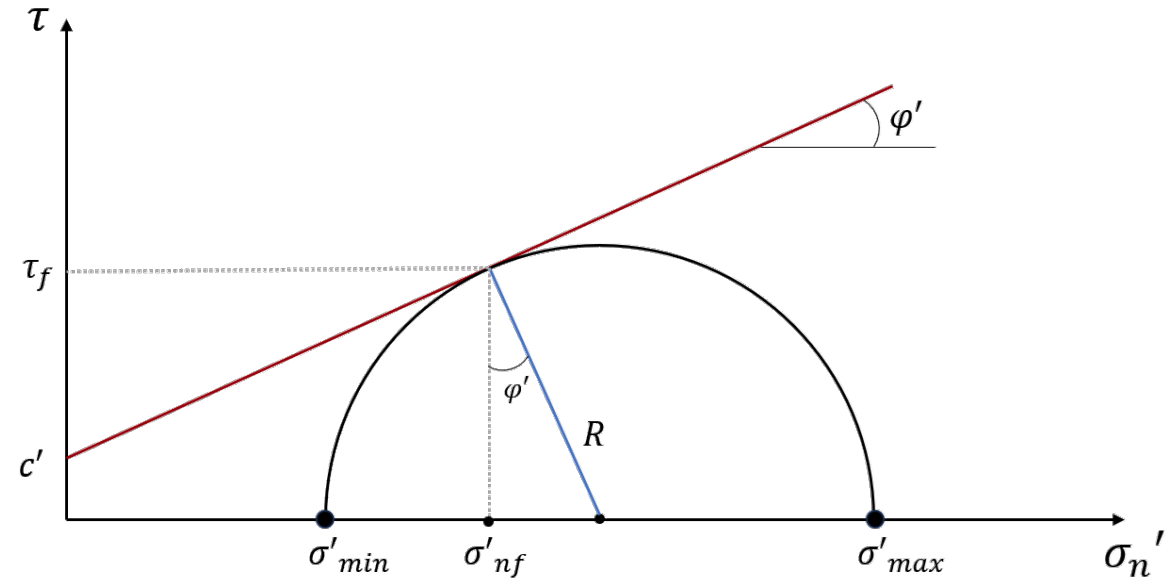

Mohr-Coulomb criterion: soil mechanics

$$\sigma'_{nf} = \frac{\sigma'_{max} + \sigma'_{min}}{2} - R \sin \varphi' = \frac{\sigma'_{max} + \sigma'_{min}}{2} - \frac{\sigma'_{max} - \sigma'_{min}}{2} \sin \varphi'$$

$$\tau_f = R \cos \varphi' = \frac{\sigma'_{max} - \sigma'_{min}}{2} \cos \varphi'$$


$$\tau_f = c' + \sigma'_{nf} \tan \varphi'$$



$$\frac{\sigma'_{max} - \sigma'_{min}}{2} = \frac{\sigma'_{max} + \sigma'_{min}}{2} \sin \varphi' + c' \cos \varphi'$$

$$F = -\frac{\sigma'_{max} - \sigma'_{min}}{2} + \frac{\sigma'_{max} + \sigma'_{min}}{2} \sin \varphi' + c' \cos \varphi' = 0$$

Yield function

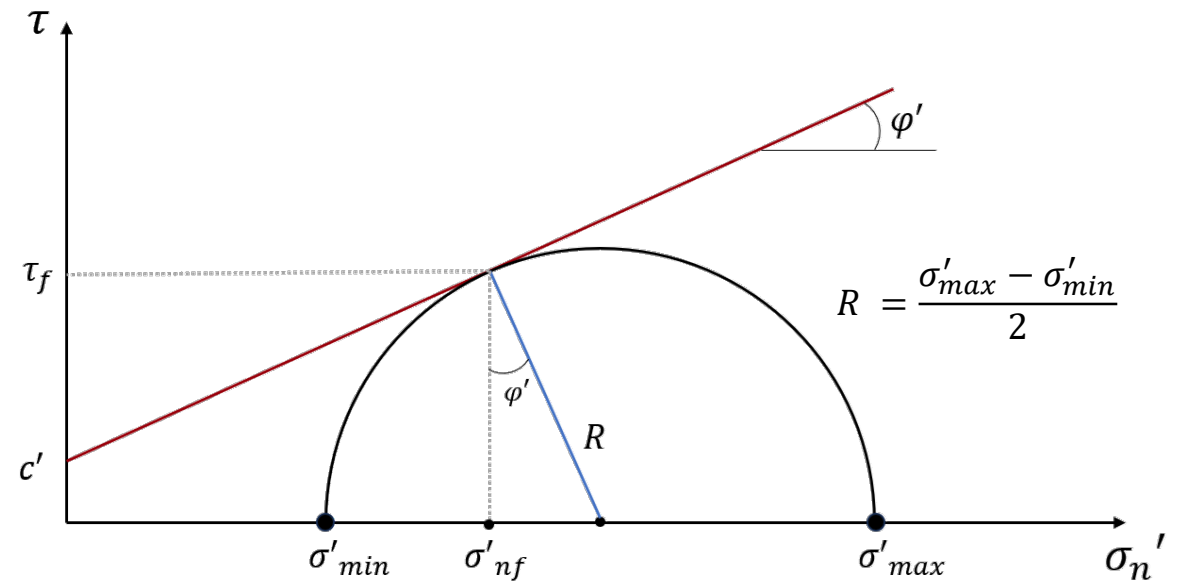

Mohr-Coulomb criterion: Triaxial formulation

$$F = -\frac{\sigma'_{max} - \sigma'_{min}}{2} + \frac{\sigma'_{max} + \sigma'_{min}}{2} \sin \varphi' + c' \cos \varphi' = 0$$



In triaxial compression test:

$$\begin{aligned} q &= \sigma'_{max} - \sigma'_{min} & \sigma'_{max} &= p' + \frac{2}{3}q \\ p' &= \frac{\sigma'_{max} + 2\sigma'_{min}}{3} & \sigma'_{min} &= p' - \frac{q}{3} \end{aligned}$$

$$q_f = \frac{6 \sin \varphi'}{3 - \sin \varphi'} p'_f + \frac{6 \cos \varphi'}{3 - \sin \varphi'} c' = M p'_f + a'$$

With:

$$M = \frac{6 \sin \varphi'}{3 - \sin \varphi'} \quad a' = \frac{6 \cos \varphi'}{3 - \sin \varphi'} c'$$

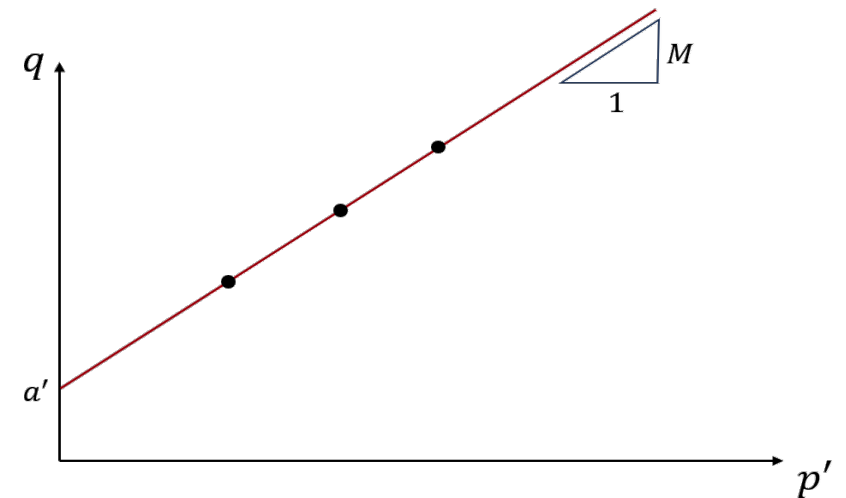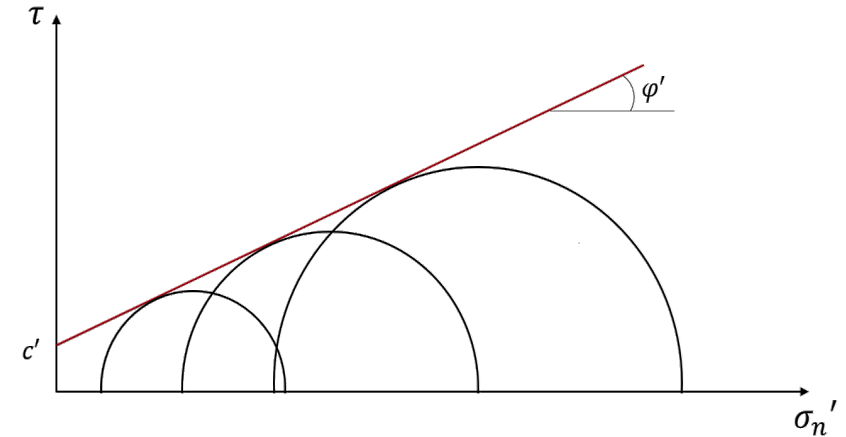

Mohr-Coulomb criterion: Triaxial CTC test

Yield function

$$F = -\frac{\sigma'_a - \sigma'_r}{2} + \frac{\sigma'_a + \sigma'_r}{2} \sin \varphi' + c' \cos \varphi' = 0$$

Stress condition


$$q = \sigma'_a - \sigma'_r$$

$$p' = \frac{1}{3}(\sigma'_a + 2\sigma'_r)$$



Yield function in terms of triaxial stress variables:

$$q_f = \frac{6 \sin \varphi'}{3 - \sin \varphi'} p'_f + \frac{6 \cos \varphi'}{3 - \sin \varphi'} c' = Mp'_f + a'$$

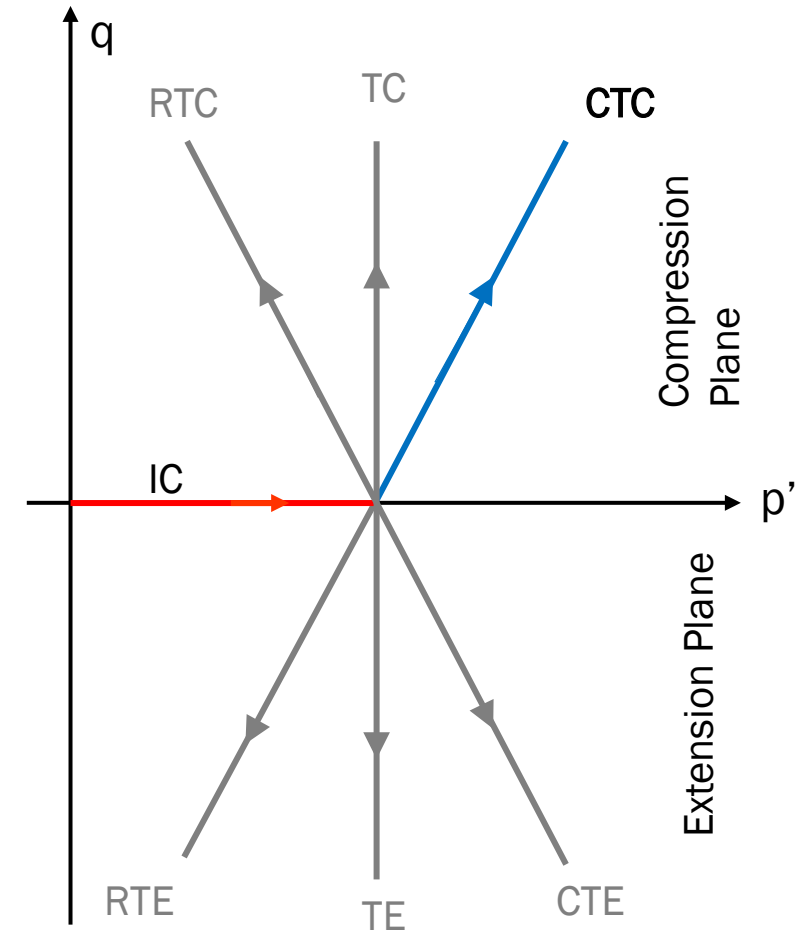

Mohr-Coulomb criterion: Triaxial RTE test

Yield function

$$F = -\frac{\sigma'_r - \sigma'_a}{2} + \frac{\sigma'_r + \sigma'_a}{2} \sin \varphi' + c' \cos \varphi' = 0$$

Stress condition


$$q = \sigma'_r - \sigma'_a$$

$$p' = \frac{1}{3}(2\sigma'_r + \sigma'_a)$$




Yield function in terms of triaxial stress variables:

$$q_f = -\frac{6 \sin \varphi'}{3 + \sin \varphi'} p'_f - \frac{6 \cos \varphi'}{3 + \sin \varphi'} c' = M_{ext} p'_f + a'_{ext}$$

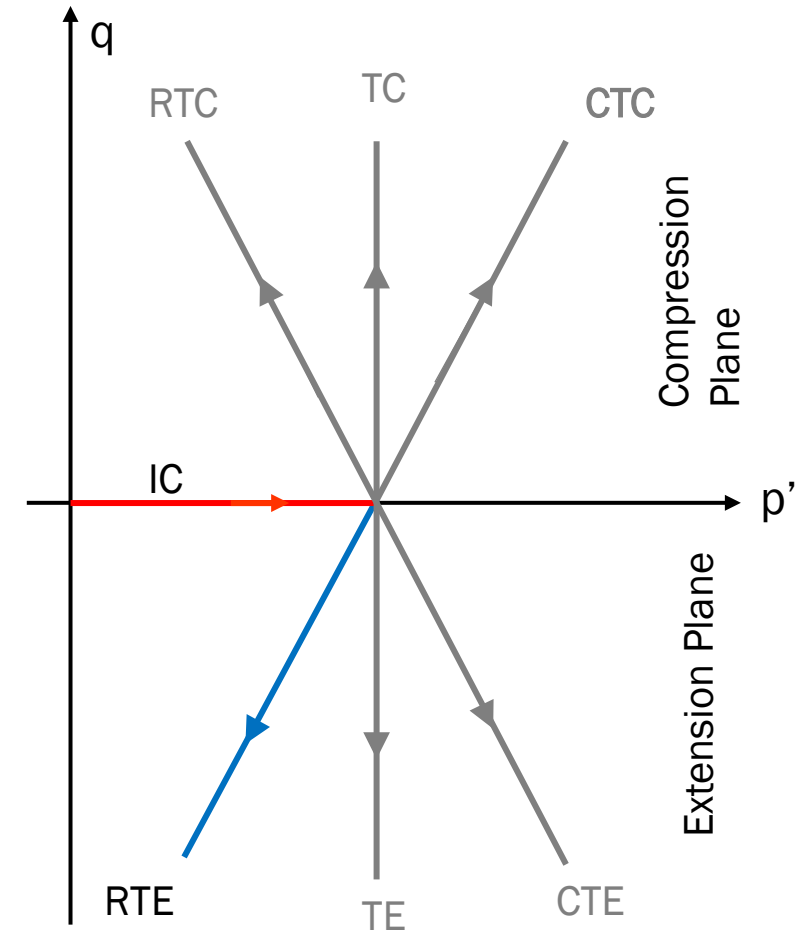

Mohr-Coulomb criterion: Triaxial envelope

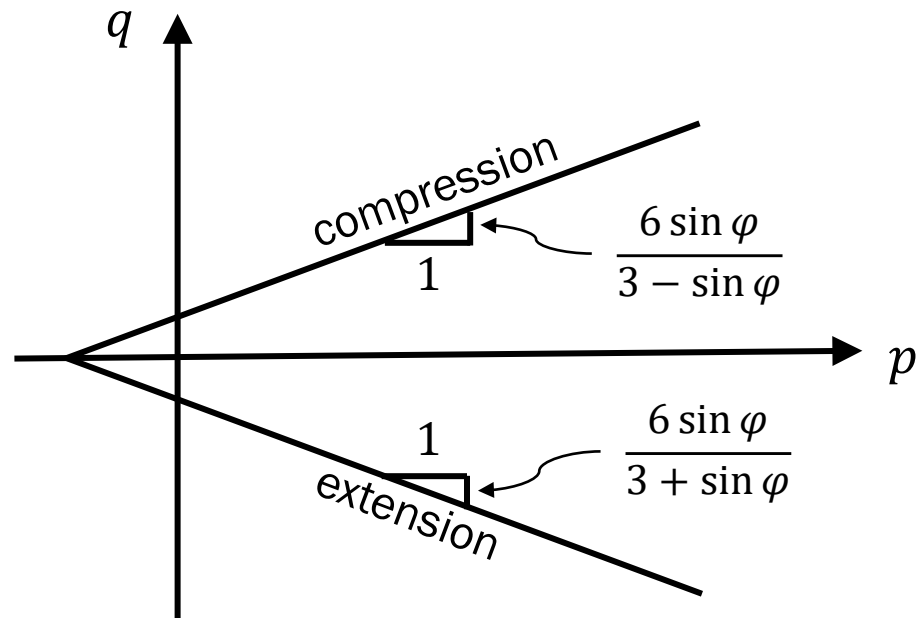

CTC


$$q_f = Mp'_f + a'$$

RTE


$$q_f = M_{ext}p'_f + a'_{ext}$$

Mohr-Coulomb criterion: Triaxial envelope

- If there is no cohesion:

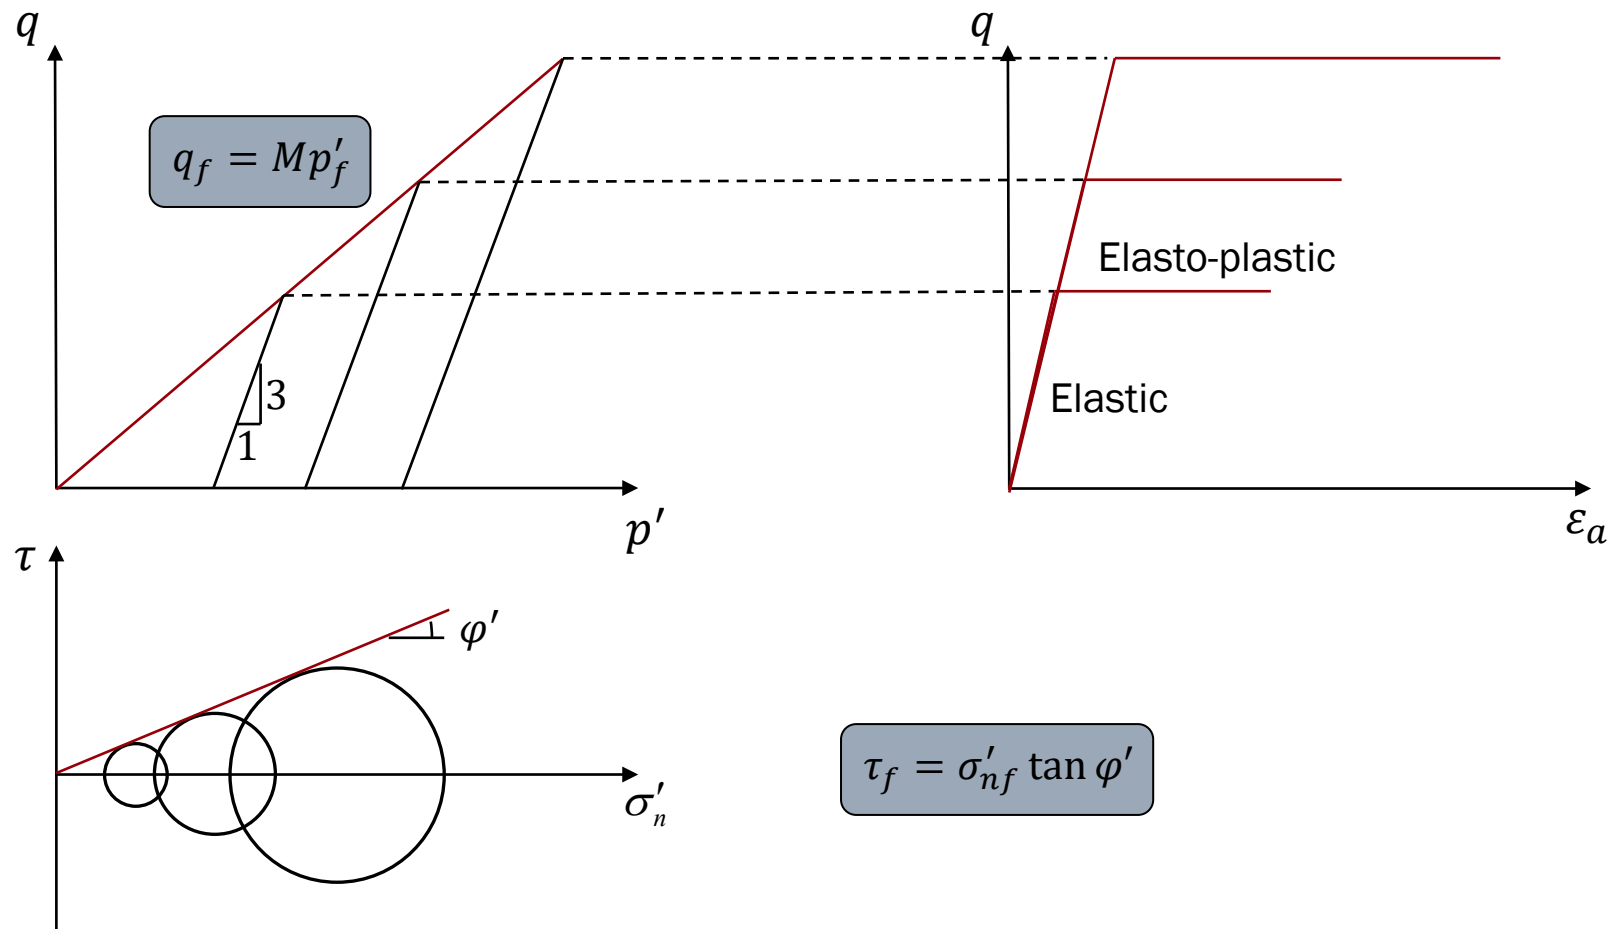

Mohr-Coulomb criterion: Graphical representation

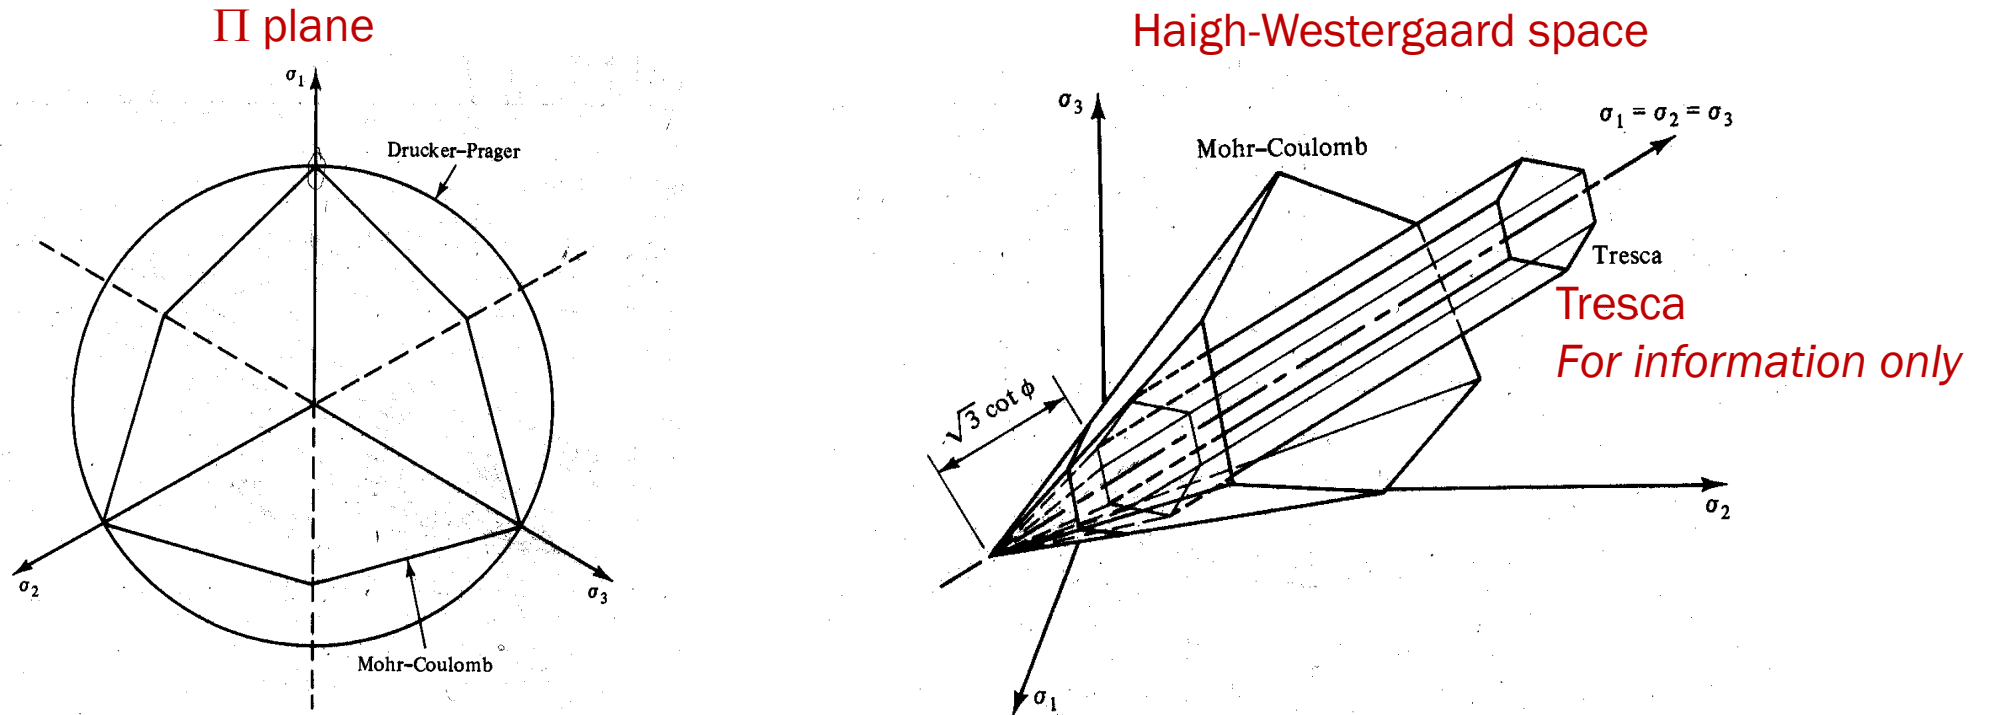

For information only: MC yield criteria in terms of stress invariants

$$F = J_1 \cdot \sin \phi + \sqrt{J_{2D}} \cdot \cos \theta - \frac{\sqrt{J_{2D}}}{3} \cdot \sin \phi \cdot \sin \theta - c \cdot \cos \phi = 0$$

$$\theta = -\frac{1}{3} \cdot \sin^{-1} \left(-\frac{3 \cdot \sqrt{3}}{2} \cdot \frac{J_{3D}}{J_{2D}^{3/2}} \right)$$

Mohr-Coulomb elasto-perfectly plastic model

- Isotropic linear elasticity

$$\begin{pmatrix} \delta p' \\ \delta q \end{pmatrix} = \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix} \begin{pmatrix} \delta \varepsilon_{vol}^e \\ \delta \varepsilon_q^e \end{pmatrix}$$

- Yield function

$$F(\sigma_i, p_k)$$



$$F(p', q, p_k) = q - Mp'$$

One geometrical parameter: $p_k = M$

- Plastic potential

$$g(\sigma_i, r_k)$$

$$g(p', q, r_k) = q - M^*p' + k$$

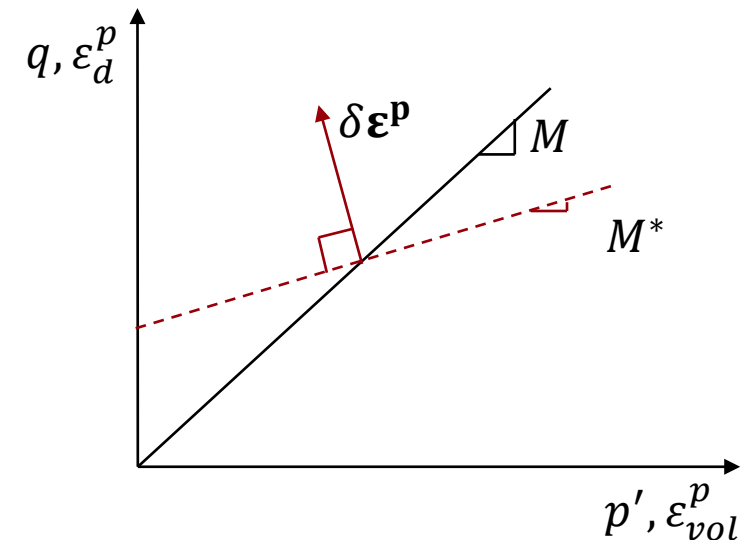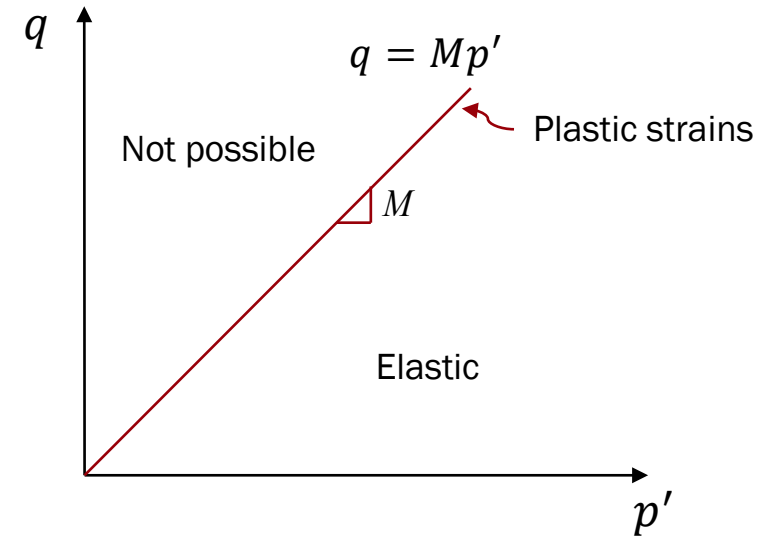


Mohr-Coulomb elasto-perfectly plastic model

$$\delta \varepsilon_i^p = \lambda \frac{\partial g}{\partial \sigma_i}; \quad \begin{pmatrix} \delta \varepsilon_{vol}^p \\ \delta \varepsilon_d^p \end{pmatrix} = \lambda \begin{pmatrix} \frac{\partial g}{\partial p'} \\ \frac{\partial g}{\partial q} \end{pmatrix} = \lambda \begin{pmatrix} -M^* \\ 1 \end{pmatrix}$$

$$\frac{\delta \varepsilon_{vol}^p}{\delta \varepsilon_d^p} = -M^*$$


If $M^* = 0$

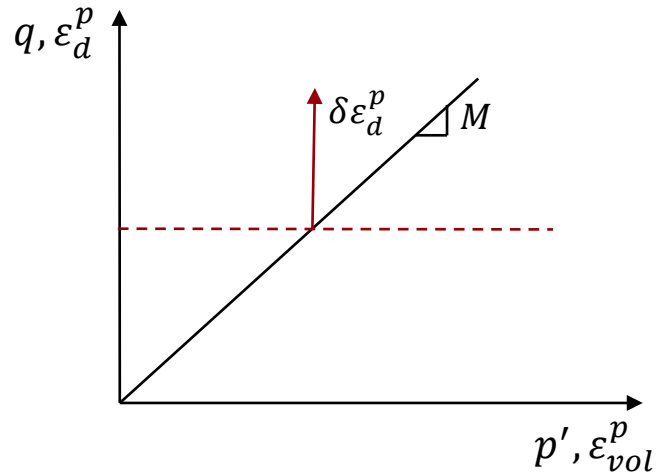

$\delta \varepsilon_v^p = 0$ No plastic volume deformation during shearing

NO DILATANCY/NO COMPACTION


If $M^* > 0$

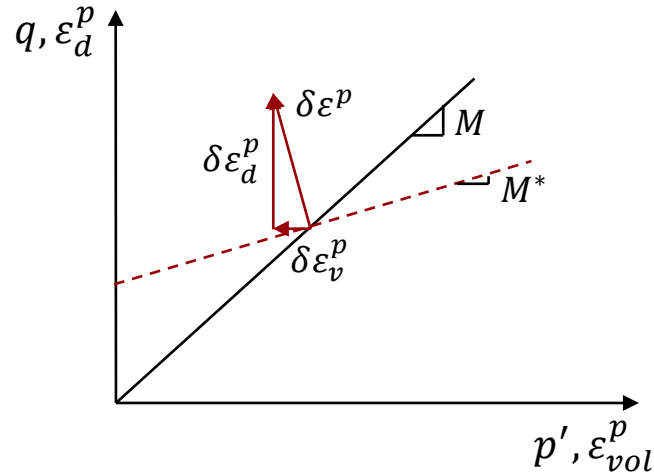

$\delta \varepsilon_v^p < 0$

DILATANCY

If $M^* < 0$

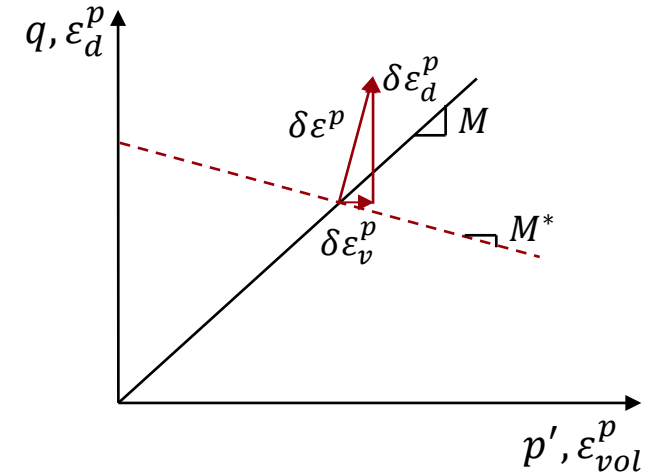

$\delta \varepsilon_v^p > 0$

COMPACTION

Mohr-Coulomb elasto-perfectly plastic model

If an associated flow rule is adopted:


$$\boxed{M^* = M} \quad \longrightarrow$$

Combining all the basic ingredients:

$$\delta\sigma'_i = \left(D_{ij}^e - \frac{D_{ij}^e \frac{\partial g}{\partial \sigma_j} \frac{\partial F}{\partial \sigma_i} D_{ij}^e}{\frac{\partial F}{\partial \sigma_i} D_{ij}^e \frac{\partial g}{\partial \sigma_j}} \right) \delta\epsilon_j$$

$$\bullet \delta\sigma'_i = \begin{pmatrix} \delta p' \\ \delta q \end{pmatrix} \quad \bullet \delta\epsilon_j = \begin{pmatrix} \delta\epsilon_{vol} \\ \delta\epsilon_q \end{pmatrix} \quad \bullet D_{ij}^e = \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix}$$

$$\bullet \frac{\partial g}{\partial \sigma_j} = \begin{pmatrix} \frac{\partial g}{\partial p'} \\ \frac{\partial g}{\partial q} \end{pmatrix} = \begin{pmatrix} -M^* \\ 1 \end{pmatrix} \quad \bullet \frac{\partial F}{\partial \sigma_i} = \begin{pmatrix} \frac{\partial F}{\partial p'} \\ \frac{\partial F}{\partial q} \end{pmatrix} = \begin{pmatrix} -M \\ 1 \end{pmatrix}$$

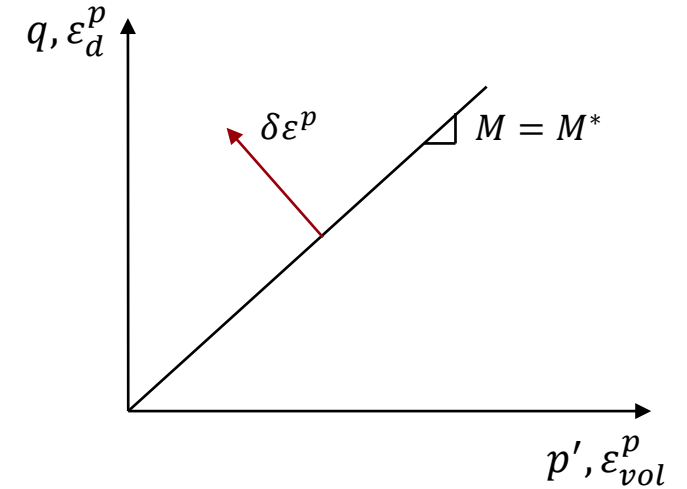

No energy dissipation

Mohr-Coulomb elasto-perfectly plastic model

$$\rightarrow \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix} - \frac{\begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix} \begin{pmatrix} -M^* \\ 1 \end{pmatrix} \begin{pmatrix} -M & 1 \end{pmatrix} \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix}}{\begin{pmatrix} -M & 1 \end{pmatrix} \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix} \begin{pmatrix} -M^* \\ 1 \end{pmatrix}} = \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix} - \frac{\begin{pmatrix} -KM^* \\ 3G \end{pmatrix} \begin{pmatrix} -KM & 3G \end{pmatrix}}{\begin{pmatrix} -KM & 3G \end{pmatrix} \begin{pmatrix} -M^* \\ 1 \end{pmatrix}} \rightarrow$$

$$\rightarrow \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix} - \frac{\begin{bmatrix} K^2 M^* M & -3KM^* G \\ -3KGM & 9G^2 \end{bmatrix}}{MKM^* + 3G} = \begin{bmatrix} K & 0 \\ 0 & 3G \end{bmatrix} - \frac{1}{MKM^* + 3G} \begin{bmatrix} K^2 M^* M & -3KM^* G \\ -3KGM & 9G^2 \end{bmatrix} \rightarrow$$

$$\rightarrow \begin{bmatrix} \cancel{K^2 M M^*} + 3GK - \cancel{K^2 M^* M} & +3KM^* G \\ +3KMG & 3GKMM^* + \cancel{9G^2} - \cancel{9G^2} \end{bmatrix} \frac{1}{MKM^* + 3G} = \frac{3GK}{MKM^* + 3G} \begin{bmatrix} 1 & M^* \\ M & MM^* \end{bmatrix}$$

$$\begin{pmatrix} \delta p' \\ \delta q \end{pmatrix} = \frac{3GK}{MKM^* + 3G} \begin{bmatrix} 1 & M^* \\ M & MM^* \end{bmatrix} \begin{pmatrix} \delta \varepsilon_v \\ \delta \varepsilon_d \end{pmatrix}$$

Conclusions

Conclusions

- Non-linear behaviour of geomaterials can be described by **plasticity**.
- An essential element of plasticity is the **yield criteria** which theoretically separates the Elastic and Plastic domain of behaviour
- **Perfect plasticity** is a rather simple approach, initially developed for metals, to model the elasto-plastic behaviour of geomaterials
- Elastic-perfectly plastic models can be successfully used to model the mechanical behaviour of geomaterials in different applications, provided that the limitations and simplifying hypotheses are appropriately taken into account.

Thank you for your attention

