


# ChE-403 Problem Set 1.3

Week 3

## Problem 1

A) Can you derive/calculate  $E(t)$  for a CSTR?

B) Can you use  $E(t)$  to calculate  $\bar{t}$ ?

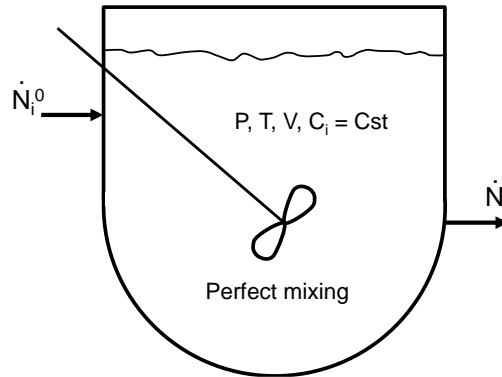

**Hint:** you measure  $E(t)$  by injecting a tracer and measuring the output concentration. Can you calculate what  $C(t)$  is for a CSTR if you inject a known number of moles of a tracer ( $N_i^0$ ) at  $t = 0$

You will also need the following integral identity:  $\int_0^{\infty} x \exp(-x) dx = 1$

## Problem 2

The equation for an axially dispersed PFR is:

$$\frac{\partial C_i}{\partial \theta} + \frac{\partial C_i}{\partial Z} = \frac{1}{Pe_a} \frac{\partial^2 C_i}{\partial Z^2}$$

For a simple PFR ( $Pe_a \rightarrow \infty$ ), the equation becomes:

$$\frac{\partial C_i}{\partial \theta} + \frac{\partial C_i}{\partial Z} = 0$$

Can you use Laplace transforms to solve this equation and calculate  $E(t)$  for a simple dirac (as the input):

$$\delta(t) = \infty @ t = 0 \text{ and } \delta(t) = 0 \text{ for } t \neq 0$$

Reminder: To use Laplace transforms to solve partial differential equations, you should:

1. Transform the equation to Laplace coordinates  $\rightarrow$  this removes time as a variable and results in an ODE (which you know how to solve)
2. Solve the resulting ODE
3. Do the revers Laplace transform to get the final result

Useful Laplace transforms (from Wikipedia):

Useful properties:


	Time domain	s domain	Comment
<b>Linearity</b>	$af(t) + bg(t)$	$aF(s) + bG(s)$	Can be proved using basic rules of integration.
<b>Frequency-domain derivative</b>	$tf(t)$	$-F'(s)$	$F'$ is the first derivative of $F$ .
<b>Frequency-domain general derivative</b>	$t^n f(t)$	$(-1)^n F^{(n)}(s)$	More general form, $n$ th derivative of $F(s)$ .
<b>Derivative</b>	$f'(t)$	$sF(s) - f(0)$	$f$ is assumed to be a differentiable function, and its derivative is assumed to be of exponential type. This can then be obtained by integration by parts
<b>Second derivative</b>	$f''(t)$	$s^2 F(s) - sf(0) - f'(0)$	$f$ is assumed twice differentiable and the second derivative to be of exponential type. Follows by applying the Differentiation property to $f'(t)$ .
<b>General derivative</b>	$f^{(n)}(t)$	$s^n F(s) - \sum_{k=1}^n s^{n-k} f^{(k-1)}(0)$	$f$ is assumed to be $n$ -times differentiable, with $n$ th derivative of exponential type. Follows by mathematical induction.

Useful transformations:

Function	Time domain $f(t) = \mathcal{L}^{-1}\{F(s)\}$	Laplace s-domain $F(s) = \mathcal{L}\{f(t)\}$	Region of convergence	Reference
unit impulse	$\delta(t)$	1	all $s$	inspection
delayed impulse	$\delta(t - \tau)$	$e^{-\tau s}$		time shift of unit impulse
unit step	$u(t)$	$\frac{1}{s}$	$\text{Re}(s) > 0$	integrate unit impulse
delayed unit step	$u(t - \tau)$	$\frac{1}{s} e^{-\tau s}$	$\text{Re}(s) > 0$	time shift of unit step
ramp	$t \cdot u(t)$	$\frac{1}{s^2}$	$\text{Re}(s) > 0$	integrate unit impulse twice
$n$ th power (for integer $n$ )	$t^n \cdot u(t)$	$\frac{n!}{s^{n+1}}$	$\text{Re}(s) > 0$ ( $n > -1$ )	Integrate unit step $n$ times

**Problem 3**

A) Can you find  $E(t)$  for the following system? A tracer injection (or dirac,  $\delta_A(t)$ ) was injected at  $t=0$  into the following system that contains two CSTRs with equal volume. The initial flowrate is  $\dot{V}$  and is split into two after the first CSTR and then mixed back together after the second CSTR.

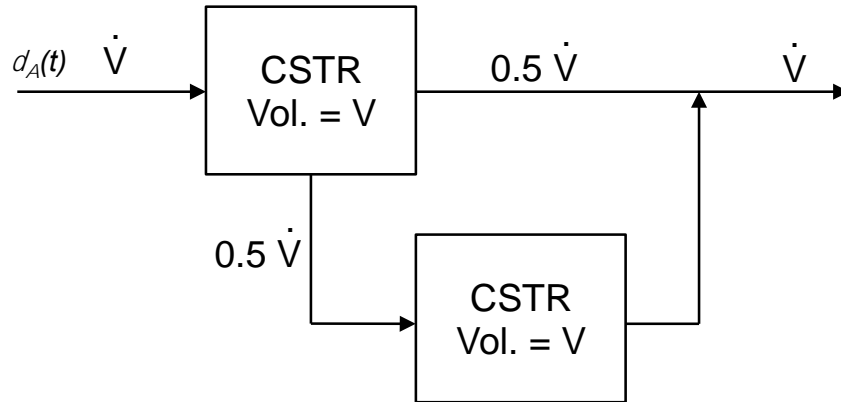

B) How does it compare to  $E(t)$  for a single CSTR of volume  $2V$ ?