
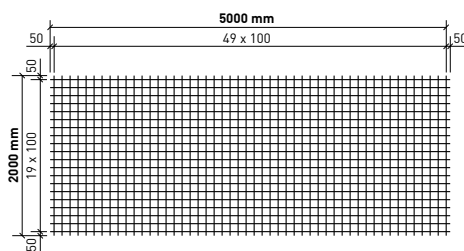


TREILLIS DE STOCK TYPE K

Treillis de stock type K

Treillis pour des armatures constructives

Type	Format L x B [m]	Écartement		Diamètre		A _s		Poids	
		long. [mm]	trans. [mm]	long. [mm]	trans. [mm]	long. [mm ² /m]	trans. [mm ² /m]	pièce [kg]	m ² [kg]
K 196	5.00 x 2.00	100	100	5	5	196	196	30.8	3.08
K 283	5.00 x 2.00	100	100	6	6	283	283	44.4	4.44
K 188	5.00 x 2.00	150	150	6	6	188	188	30.2	3.02
K 335	5.00 x 2.00	150	150	8	8	335	335	53.7	5.37

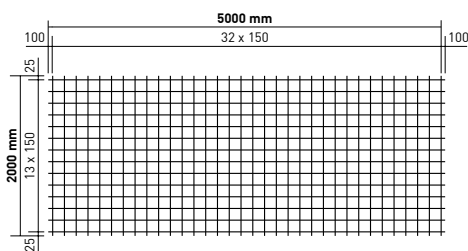

Propriétés mécaniques

Valeurs caractéristiques

Norme	SIA 262 – B500A		
Limite d'allongement f_{sk}	[N/mm ²]	500	
Classe de ductilité	[-]	A	
Rapport $(f_t/f_s)_k$	[-]	≥ 1.05	
Allongement sous charge maximale ϵ_{uk}	[%]	≥ 2.5	

Homologation

CH | SIA 262 | Registre M1.1 | 5 – 10 mm

Soudabilité

attestée [C ≤ 0.15 %; Ceq ≤ 0.35 %]



Stahl Gerlafingen

Stahl Gerlafingen AG, CH-4563 Gerlafingen

Tél. 032 674 22 22, Fax 032 674 28 46

www.stahl-gerlafingen.com

sales@stahl-gerlafingen.com

Une entreprise du **Groupe Beltrame**



10.2016/F