Image Processing 1, Mock Midterm Exam

November 9, 2023

1 Fourier Transforms

(a) Compute the Fourier transform of

$$f(x,y) = x\operatorname{sinc}(y)e^{-x^2 + j2\pi y}.$$

(b) Compute the inverse Fourier transform of

$$\hat{g}(\omega_x, \omega_y) = e^{-\omega_x^2} \cos(100\omega_y).$$

(c) Using Parseval's formula, show that

$$\int_{-\infty}^{\infty} \int_{-\infty}^{\infty} e^{-2x^2 + j2\pi y} x \operatorname{sinc}(y) \cos(100y) dx dy = 0.$$

2 Image Acquisition

A camera's acquisition system is modeled by the following block-diagram:

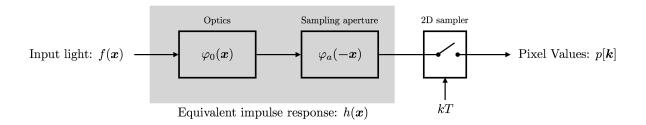


Figure 1: An image-acquisition system

In this system, we set

$$\widehat{\varphi_0}(\omega_x, \omega_y) = \operatorname{tri}\left(\frac{\omega_x}{\omega_0}\right) \operatorname{tri}\left(\frac{\omega_y}{\omega_0}\right),$$

and


$$\varphi_a(x,y) = \frac{\omega_0^2}{4\pi^2} \operatorname{sinc}\left(\frac{\omega_0 x}{2\pi}\right) \operatorname{sinc}\left(\frac{\omega_0 y}{2\pi}\right).$$

(a) Compute the Fourier transform of the equivalent impulse response h(x,y) of the camera.

(b) Given a signal that has passed through the camera, what is the maximum step T that can be used to sample it without aliasing.

3 Modulation

Consider the system T specified by the following block diagram.

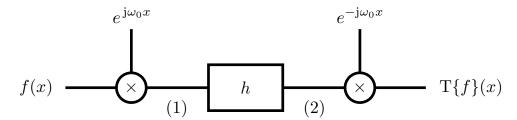

In this system, we set $\hat{h}(\omega) = \operatorname{tri}(\omega/\pi)$ and $\omega_0 = \pi$. Furthermore, suppose that the input f(x) to the system has Fourier transform \hat{f} that is supported on $[-\pi, \pi]$.

- (a) On what frequencies is the system supported on at (1) with input f?
- (b) On what frequencies is the system supported on at (2) with input f?
- (c) On what frequencies is the output of the system $T\{f\}$ supported on?
- (d) Can you propose an equivalent implementation of T as an LSI filter? If yes, (i) give an explicit formula for the frequency response of the corresponding filter (ii) draw a picture of the frequency response and (iii) specify if the filter is all-pass (AP), low-pass (LP), band-pass (BP), high-pass (HP), band-cut (BC), or all-cut (AC). If no, explain why.