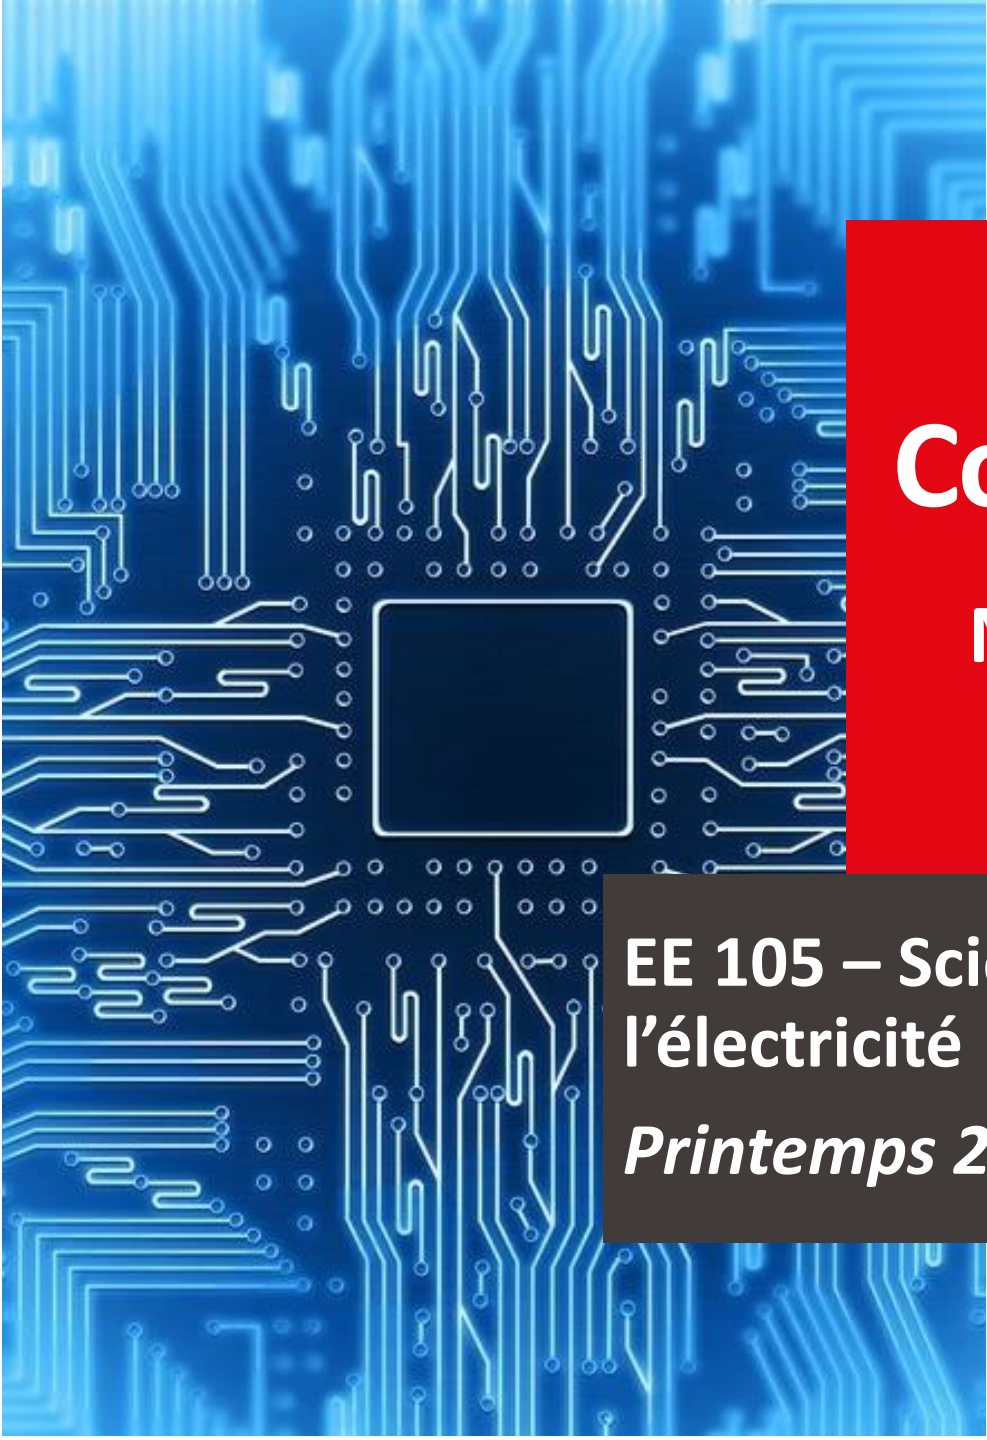


The background of the slide features a blue circuit board pattern with white lines and dots, representing a complex electronic circuit. A central square area is highlighted in a darker blue.

Complément de cours

Nombres complexes

EE 105 – Sciences et Technologies de
l'électricité

Printemps 2023

Définitions

❑ Forme algébrique

$$\underline{z} = x + jy$$

❑ Forme trigonométrique

$$\underline{z} = \rho(\cos(\theta) + j\sin(\theta))$$

❑ Forme exponentielle

$$\underline{z} = \rho e^{j\theta}$$

❑ $\text{Re}(\underline{z}) = x = \rho \cdot \cos(\theta)$; $\text{Im}(\underline{z}) = y = \rho \cdot \sin(\theta)$

$$|\underline{z}| = \rho = \sqrt{x^2 + y^2} \quad ; \quad \arg(\underline{z}) = \theta$$

❑ $\cos(\theta) = \frac{x}{\rho}$; $\sin(\theta) = \frac{y}{\rho}$; $\tan(\theta) = \frac{y}{x}$

Complexe conjugué

- Forme algébrique

$$\underline{z} = x + jy \Rightarrow \underline{z}^* = x - jy$$

- Forme trigonométrique

$$\underline{z} = \rho(\cos(\theta) + j\sin(\theta)) \Rightarrow \underline{z}^* = \rho(\cos(\theta) - j\sin(\theta))$$

- Forme exponentielle


$$\underline{z} = \rho e^{j\theta} \Rightarrow \underline{z}^* = \rho e^{-j\theta}$$

- $\text{Re}(\underline{z}^*) = x = \rho \cdot \cos(\theta) \quad ; \quad \text{Im}(\underline{z}^*) = -y = -\rho \cdot \sin(\theta)$


$$|\underline{z}^*| = \rho = \sqrt{x^2 + y^2} \quad ; \quad \arg(\underline{z}^*) = -\theta$$

- $|\underline{z}|^2 = \underline{z} \cdot \underline{z}^*$

Plan complexe

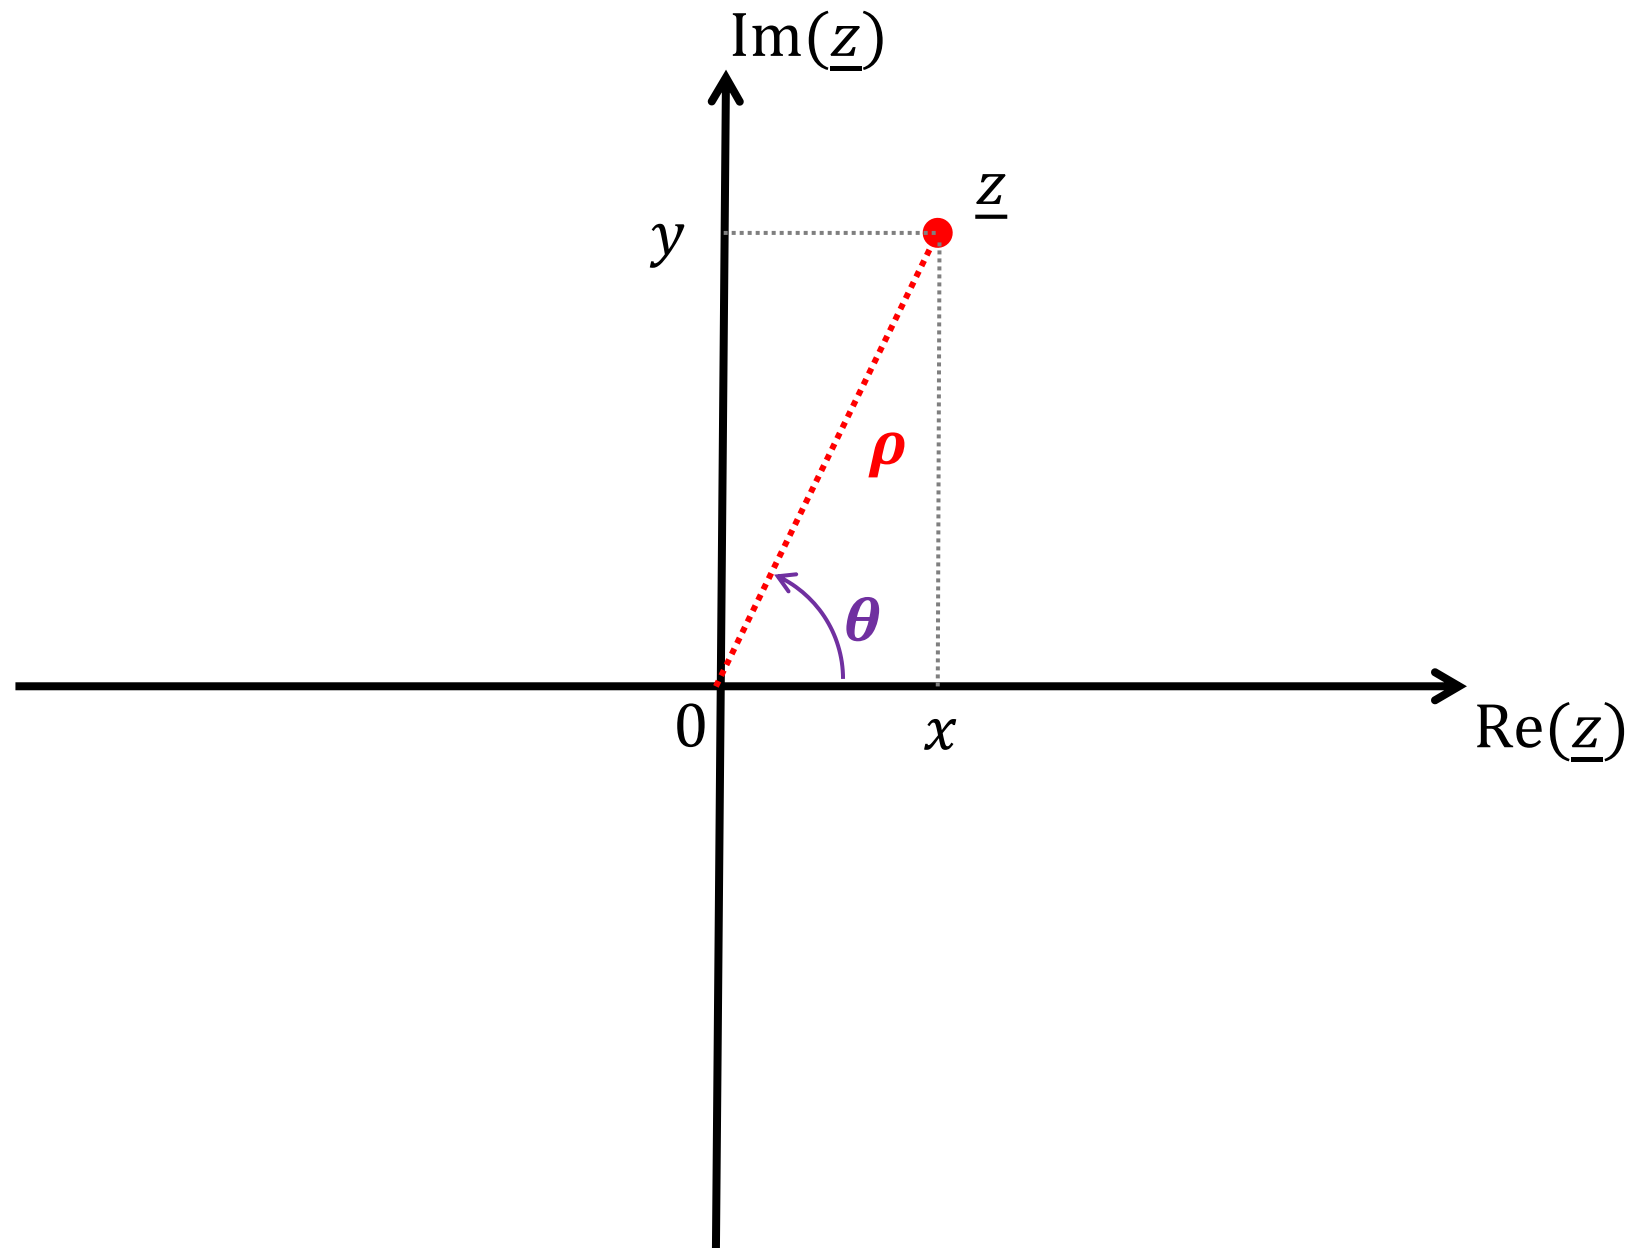


Plan complexe

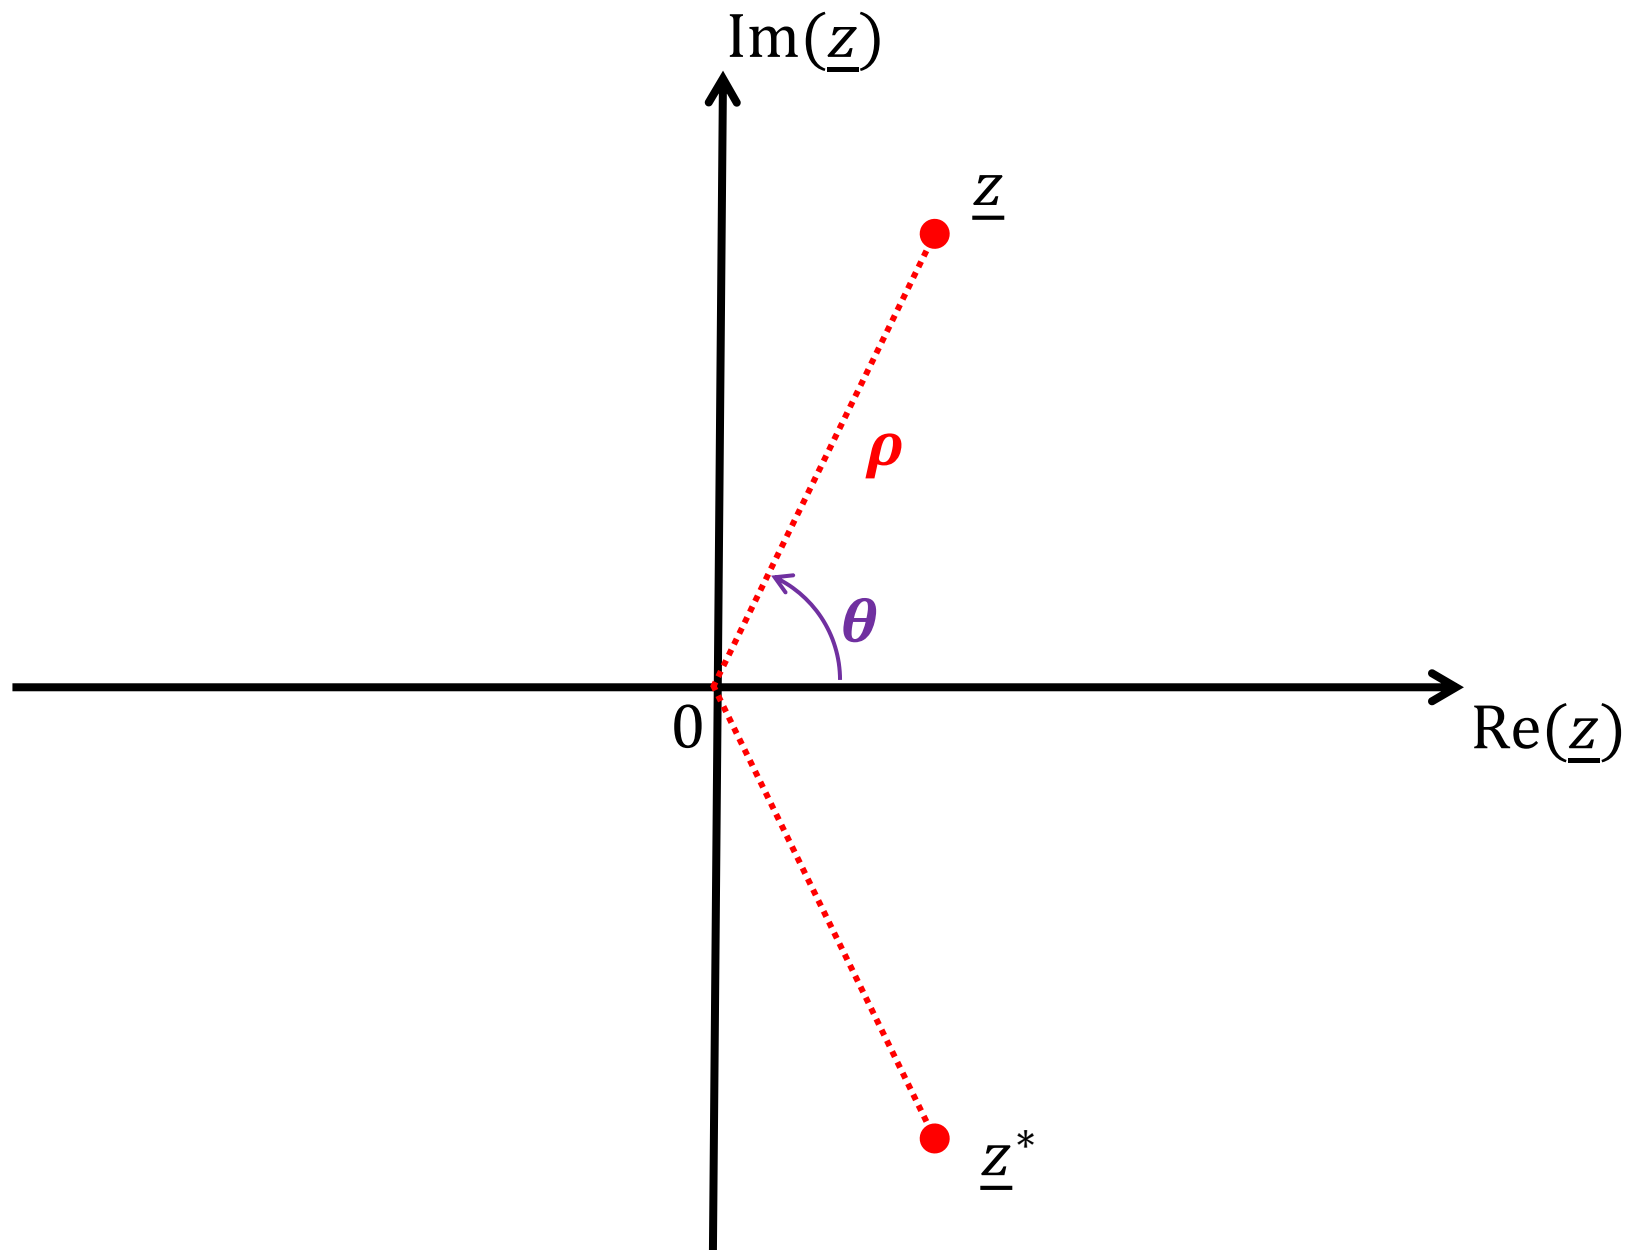

Cas particuliers

- $\underline{z}_1 \in \mathbb{R}_+^* \Rightarrow \theta_1 = 0 [2\pi]$
- $\underline{z}_2 \in \mathbb{R}_-^* \Rightarrow \theta_2 = \pi [2\pi]$
- $\underline{z}_3 \in j\mathbb{R}_+^* \Rightarrow \theta_3 = \frac{\pi}{2} [2\pi]$
- $\underline{z}_4 \in j\mathbb{R}_-^* \Rightarrow \theta_4 = -\frac{\pi}{2} [2\pi]$

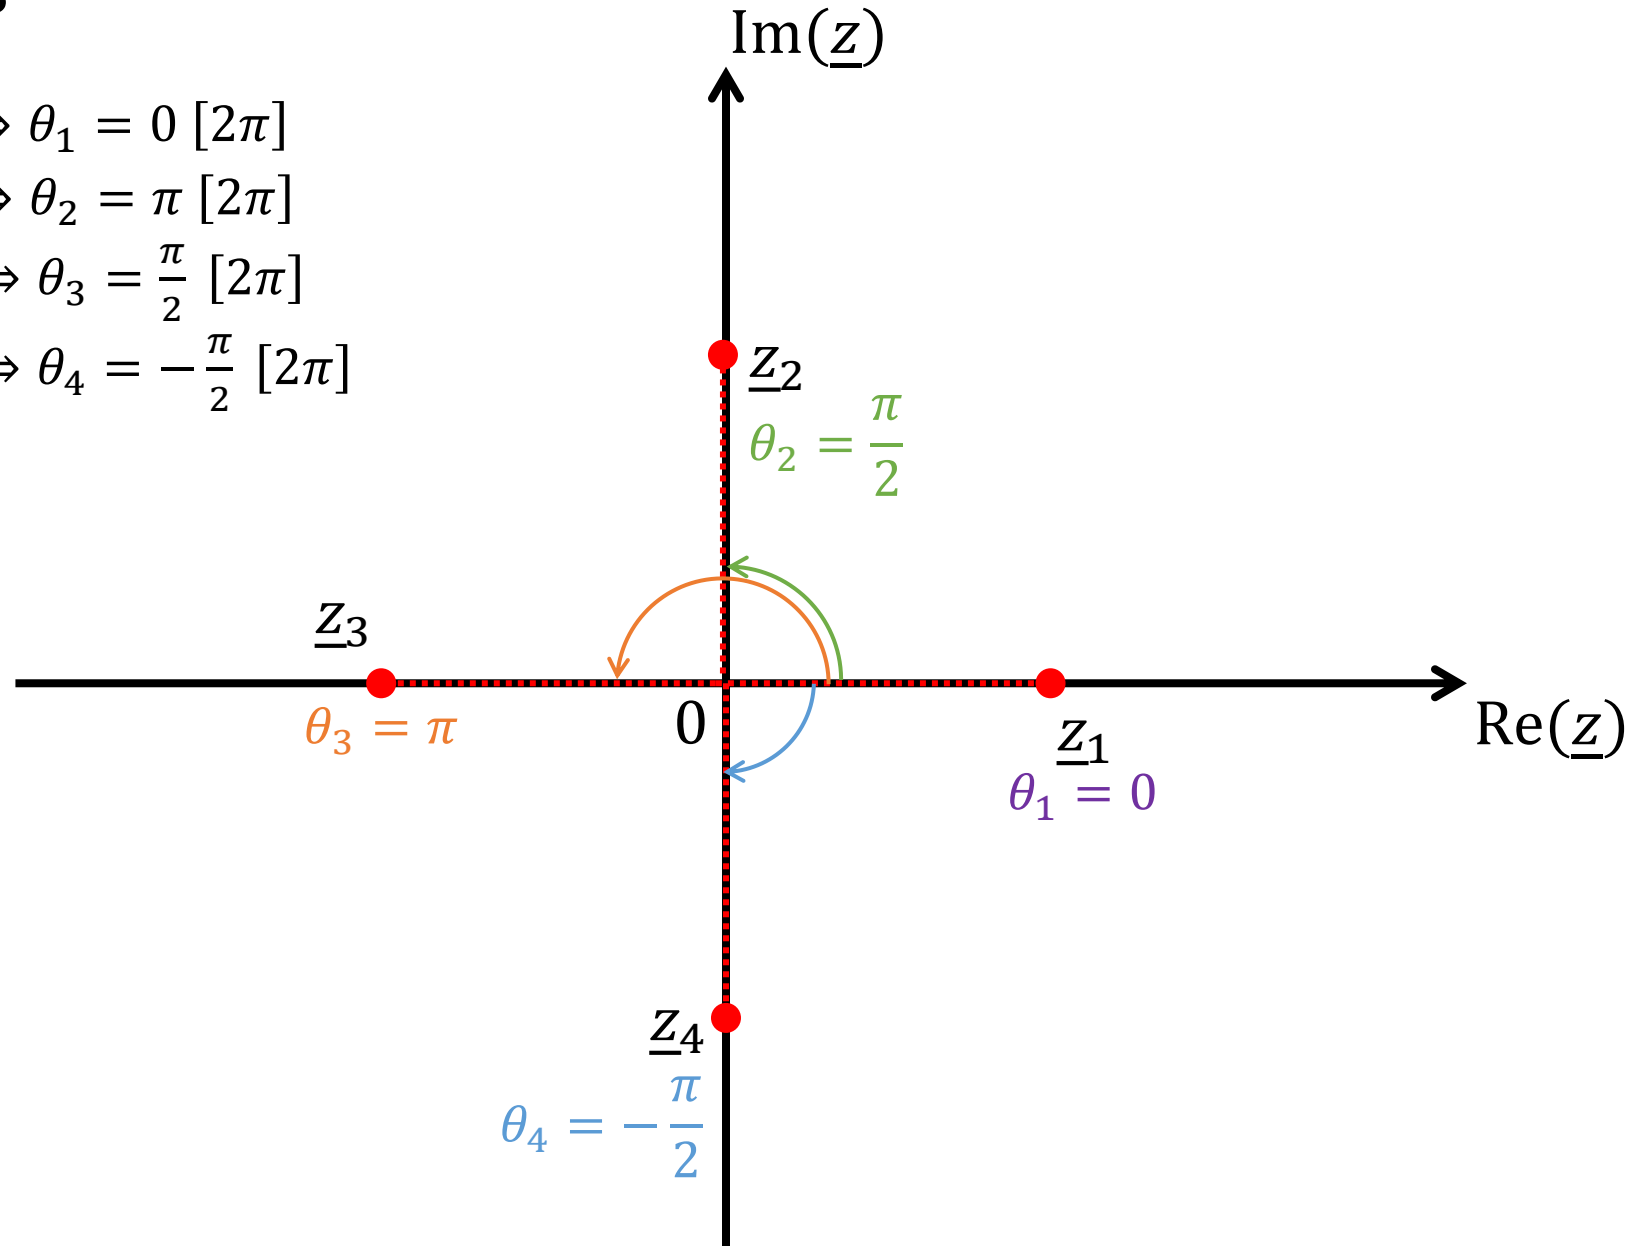

Formules

$$\square \operatorname{Re}(\underline{z}_1 + \underline{z}_2) = \operatorname{Re}(\underline{z}_1) + \operatorname{Re}(\underline{z}_2)$$

$$\square \operatorname{Im}(\underline{z}_1 + \underline{z}_2) = \operatorname{Im}(\underline{z}_1) + \operatorname{Im}(\underline{z}_2)$$

$$\square |\underline{z}_1 \cdot \underline{z}_2| = |\underline{z}_1| \cdot |\underline{z}_2|$$

$$\square (\underline{z}_1 \cdot \underline{z}_2)^* = \underline{z}_1^* \cdot \underline{z}_2^*$$

$$\square \arg(\underline{z}_1 \cdot \underline{z}_2) = \arg(\underline{z}_1) + \arg(\underline{z}_2)$$

$$\square \left| \frac{\underline{z}_1}{\underline{z}_2} \right| = \frac{|\underline{z}_1|}{|\underline{z}_2|}$$

$$\square \arg\left(\frac{\underline{z}_1}{\underline{z}_2}\right) = \arg(\underline{z}_1) - \arg(\underline{z}_2)$$

$$\square |\underline{z}^n| = |\underline{z}|^n$$

$$\square \arg(\underline{z}^n) = n \cdot \arg(\underline{z})$$

Cas particuliers

$$\underline{z} = x + j \cdot y = \rho \cdot e^{j\theta}$$

$$\square x \in \mathbb{R}_+^* \Rightarrow \theta = \arctan\left(\frac{y}{x}\right)$$

$$\square x \in \mathbb{R}_-^*, y \in \mathbb{R}_+^* \Rightarrow \theta = \arctan\left(\frac{y}{x}\right) + \pi$$

$$\square x \in \mathbb{R}_-^*, y \in \mathbb{R}_-^* \Rightarrow \theta = \arctan\left(\frac{y}{x}\right) - \pi$$

