

Irrigation and Drainage Engineering

(Soil Water Regime Management)

(ENV-549, A.Y. 2024-25)

4ETCS, Master option

Prof. Paolo Perona

Platform of Hydraulic Constructions



Lecture 8-1. Micro-irrigation:
principles and benefits

Localized irrigation or Micro-Irrigation

Basic characteristics:


- localised apportion
- low flow
- at frequent intervals

Several techniques :

- line system (Bas-Rhône system)
- mini-diffuser system
- drip system



“...sustainable irrigation must harmoniously balance the concurring water demands for industrial and municipal uses with the requirements of natural ecosystems.” (Vico & Porporato, WRR 2010)

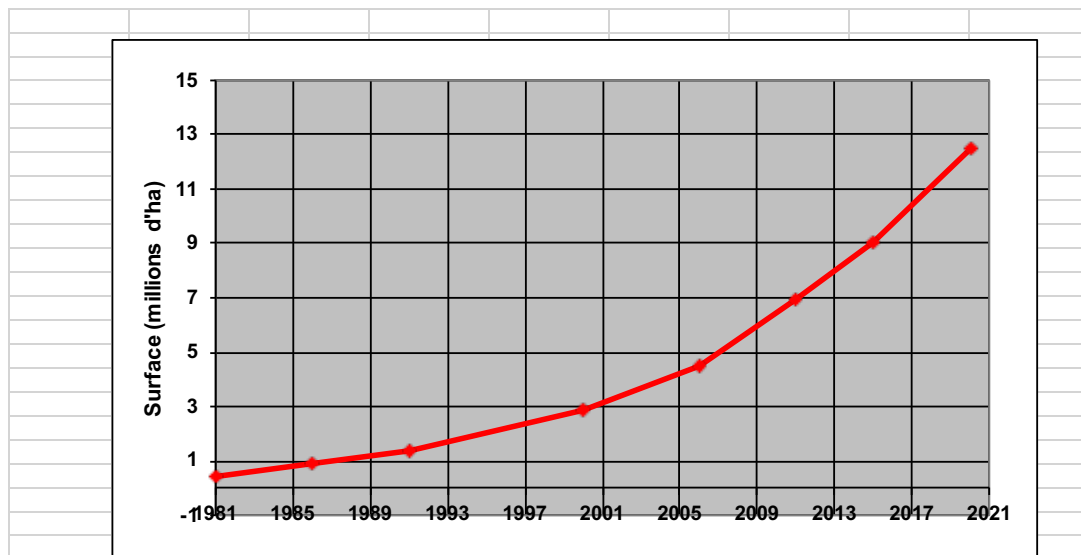

Changes in the global surface implementing microirrigation worldwide

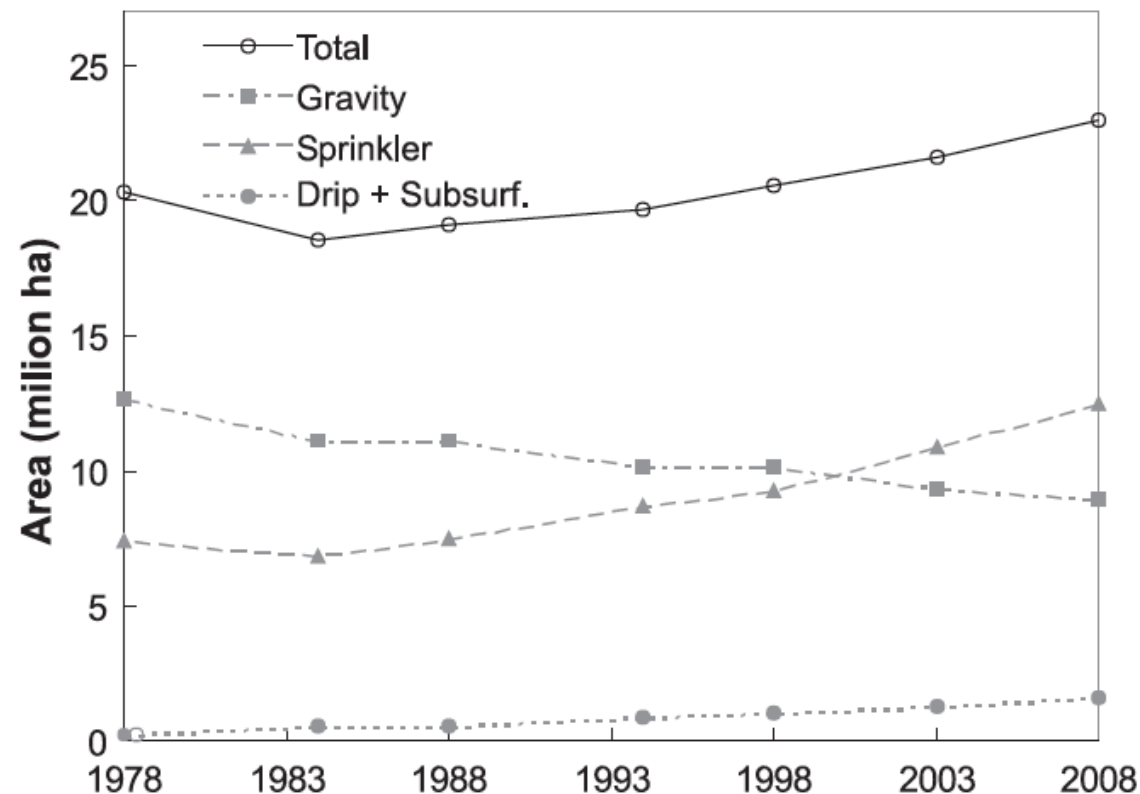


Fig. 2. Changes in irrigated areas by irrigation methods in the USA over the period 1978–2008. Source of data: Table 4 of the US Census of Agriculture, Farm and Ranch Irrigation Survey for the corresponding years. Over the period 1978–1994, reported areas refer to the USA conterminous states only.

After Vico and Porporato,
 Advances in Water
 Resources, 2011


Ecohydrological basis of microirrigation



Concept (stress avoidance irrigation):

- Maximize crop production (contrary to deficit irrigation)
- Water must be delivered before soil moisture hits the stress level
- Stress level can be associated to that inducing stomatal closure, s^*

$$nZ_r \frac{ds(t)}{dt} = R(t) + I(s(t)) - ET(s(t)) - LQ(s(t)),$$

- Rain fed irrigation, i.e. no artificial irrigation (dotted line)
- Traditional (furrow or flood) irrigation (dashed line)
- Microirrigation (solid line)



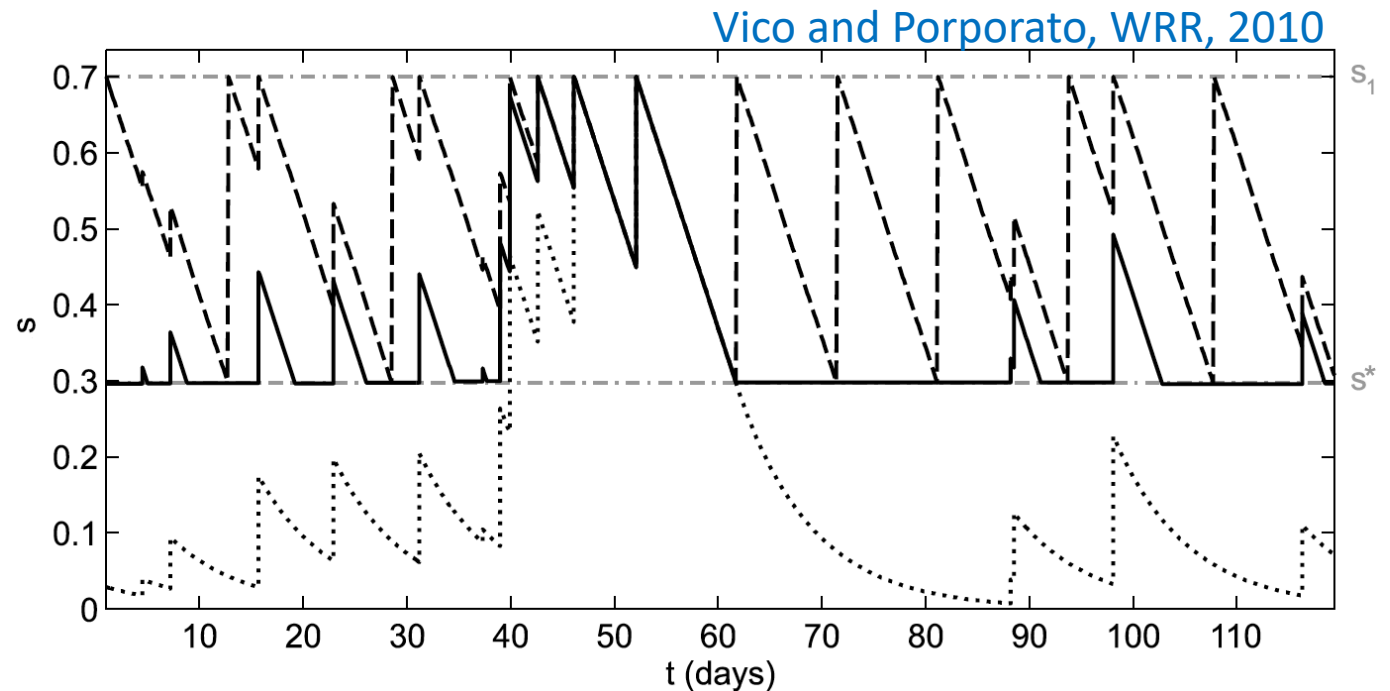


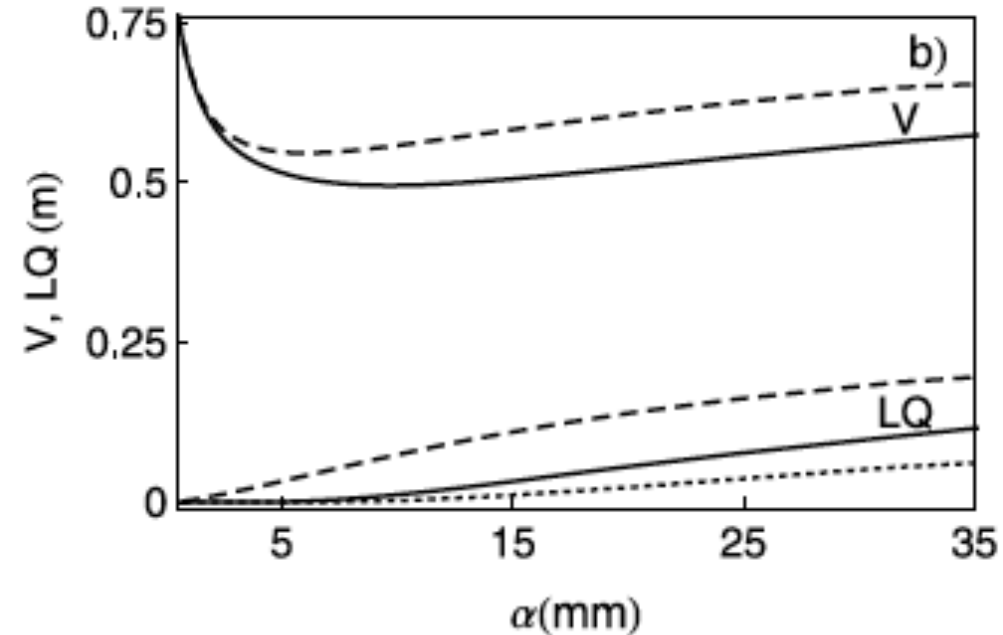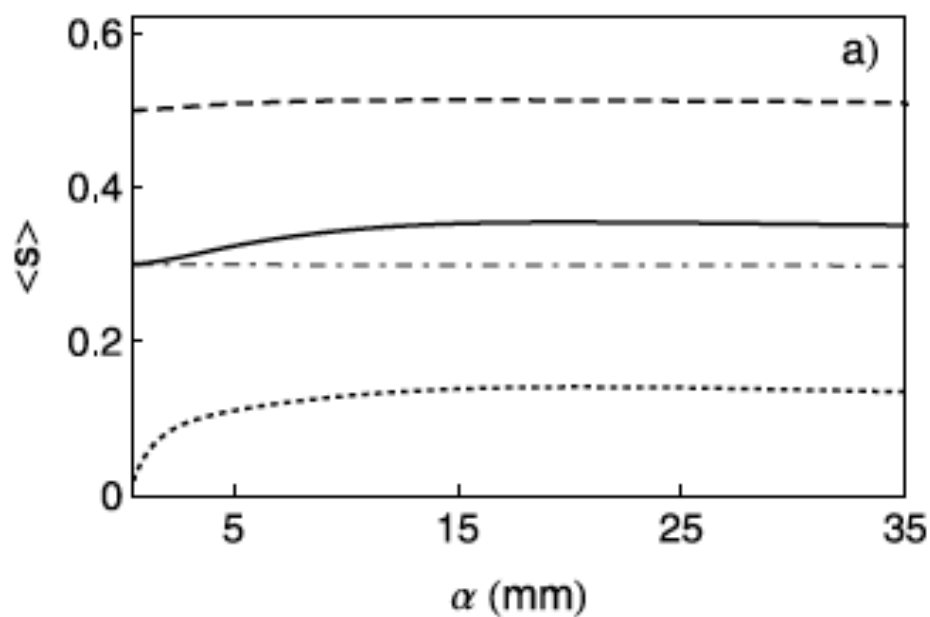


(a) Average soil moisture and (b) long-term soil water balance for fixed total growing season rainfall depth ($R_{\text{tot}} = 400$ mm) and variable I and a , for rain-fed agriculture (short-dashed lines), microirrigation (solid lines), and traditional irrigation (long-dashed lines). In Figure 2a the dash-dotted line represents s^* . In Figure 2b, irrigation volumes, V , are compared to deep percolation and runoff losses, LQ (short-dashed line refer to LQ for rain-fed agriculture). The components of the water balance are expressed as volumes per unit area, i.e., depths. The growing season duration, T_{seas} , is assumed to be 180 days; all the other parameters are as in Figure 1.

Comparison between irrigation methods

After Vico and Porporato,
Advances in Water
Resources, 2011

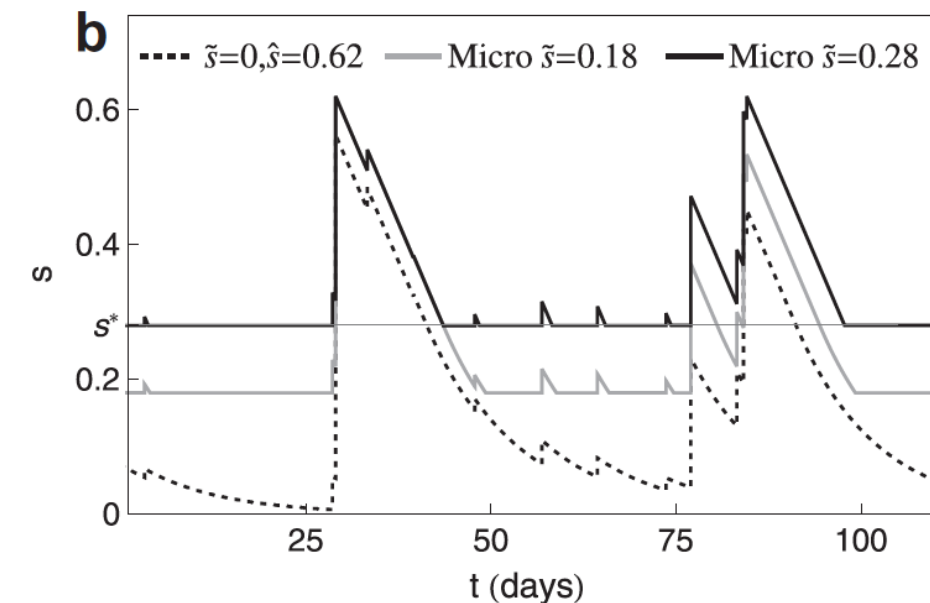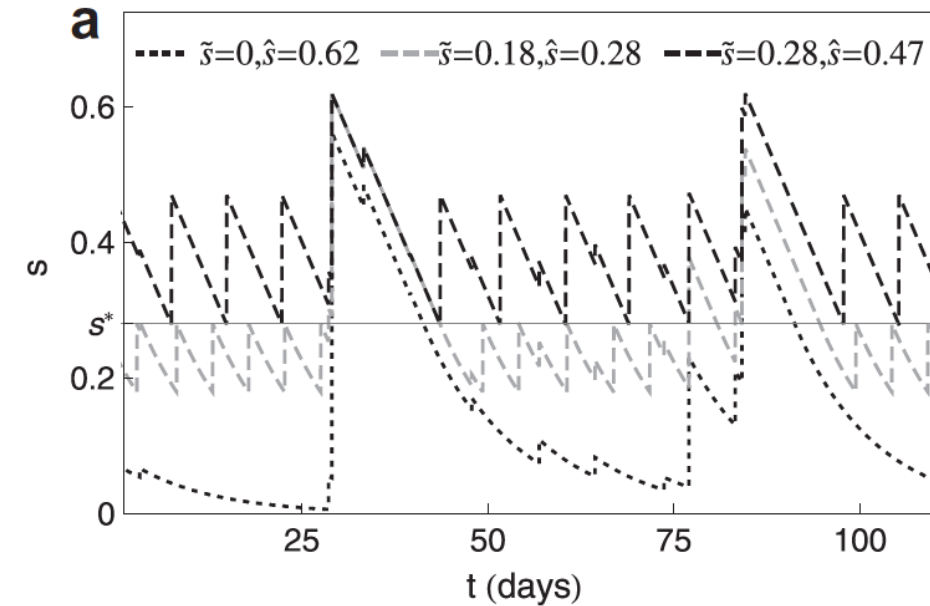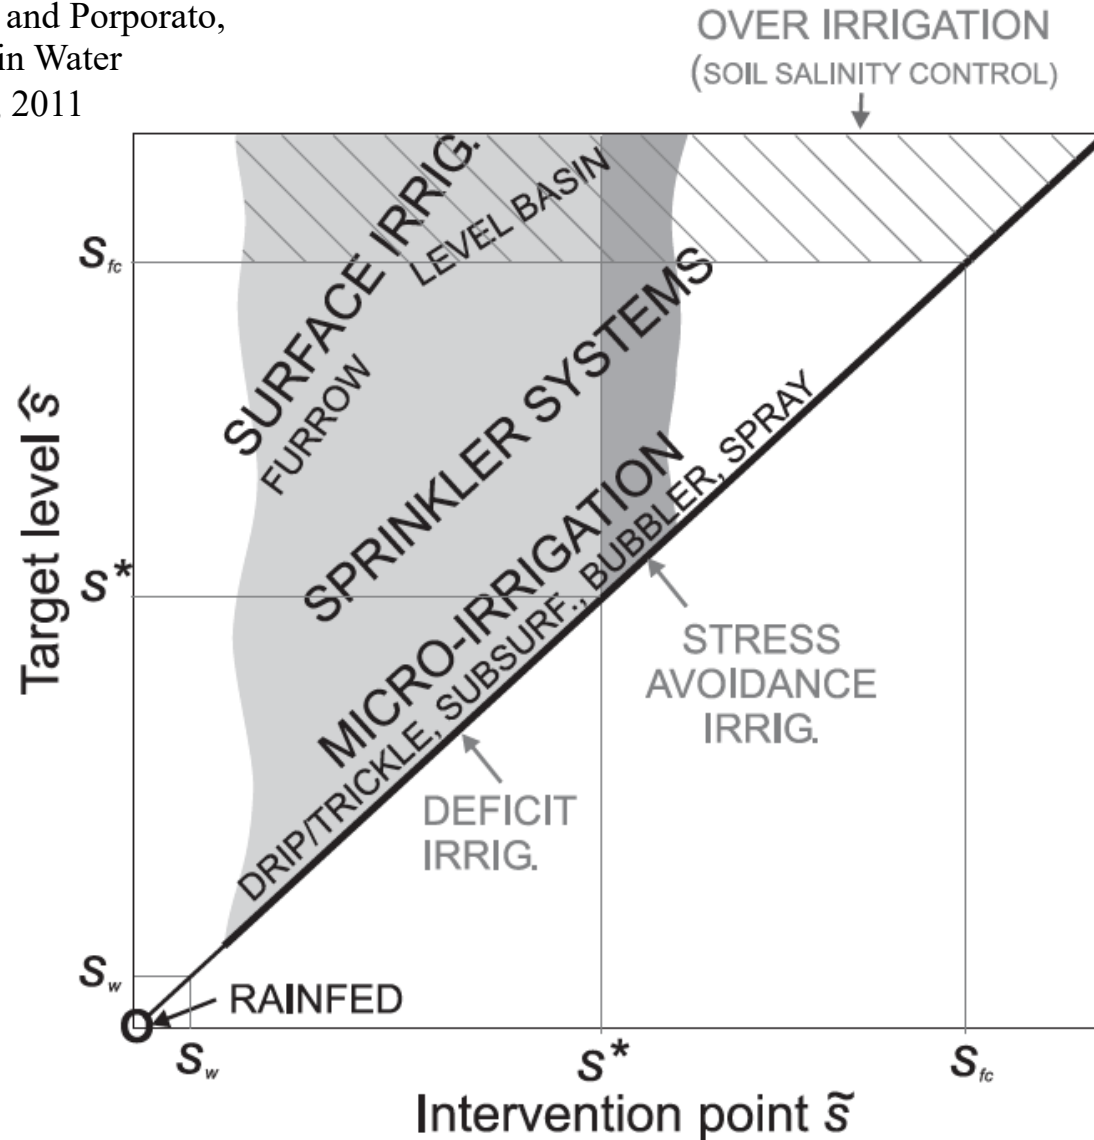


Line system (Bas-Rhône)

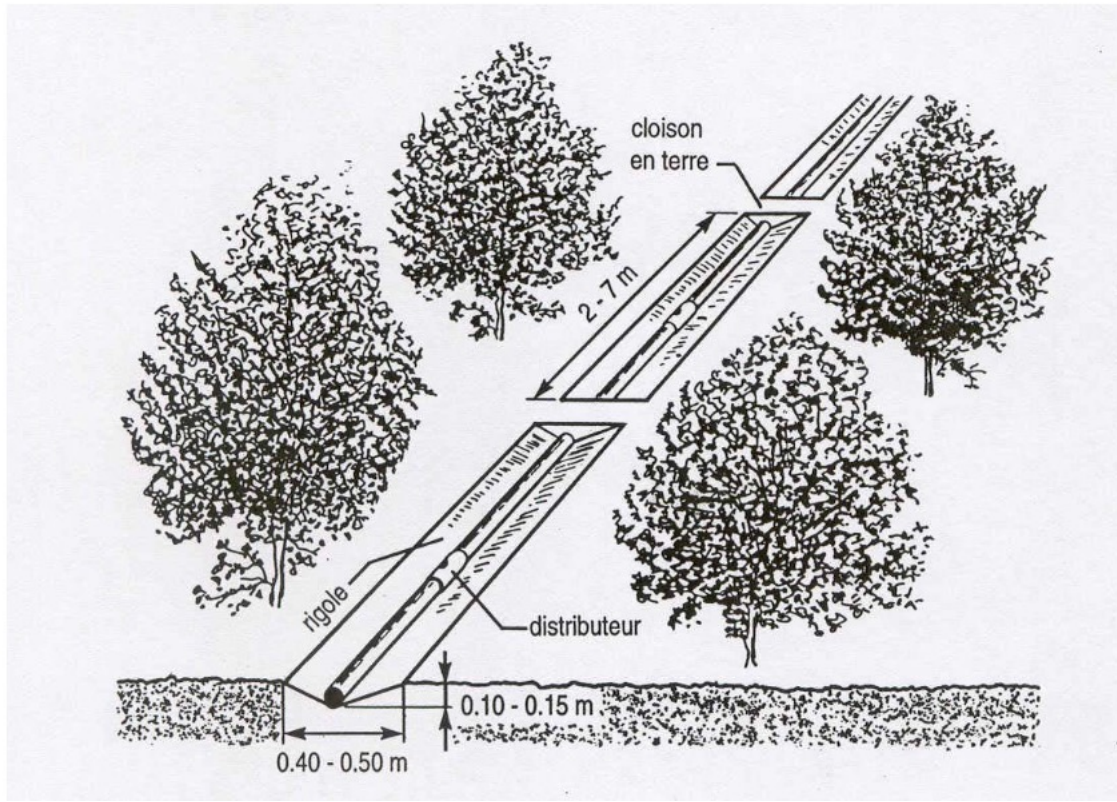


Water distribution is done by means of calibrated nozzles of variable diameter (1.2 – 2.1 mm), deployed as derivation of a PE ramp (diameter 25 mm ca.) layed down within shallow furrows parallel to the tree line

Mini-diffuser systems

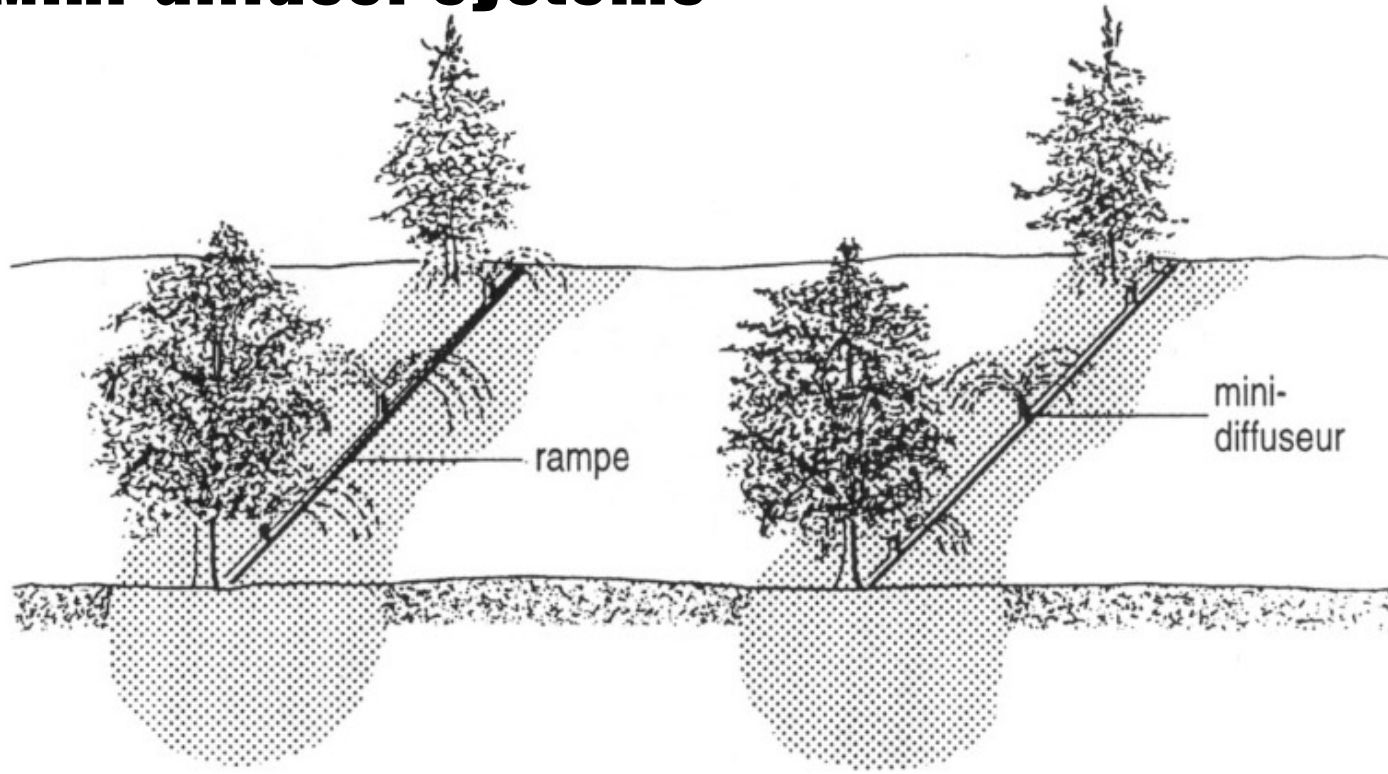

Shape of the irrigated surfaces depending on the type of mini-diffuser

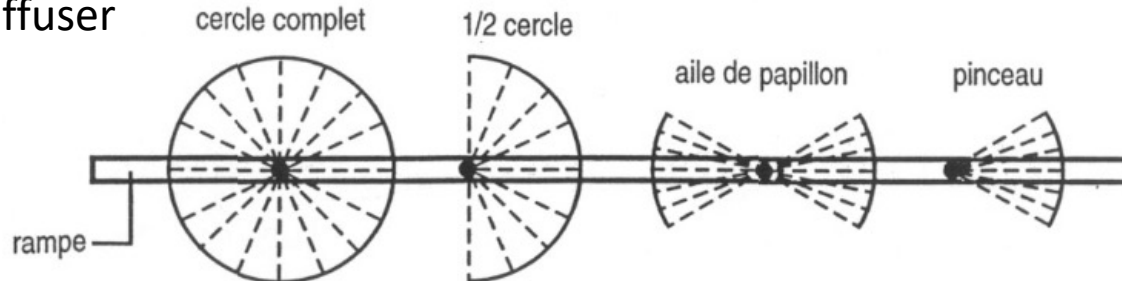

Done by means of small static sprinklers whose continuous jet only covers the surface occupied by the crops.

Mini-diffuser


Operating pressure: 1 – 2 bars

Flowrate: 20 – 60 l/h (occasionally 120 l/h and up to 6 bars for self regulating devices)

Distributing ramp

- Buried or above the soil (diffuser elevated 50 cm above soil)
- Suspended (diffuser attached directly to the ramp)

Dripping system (goute à goutte)

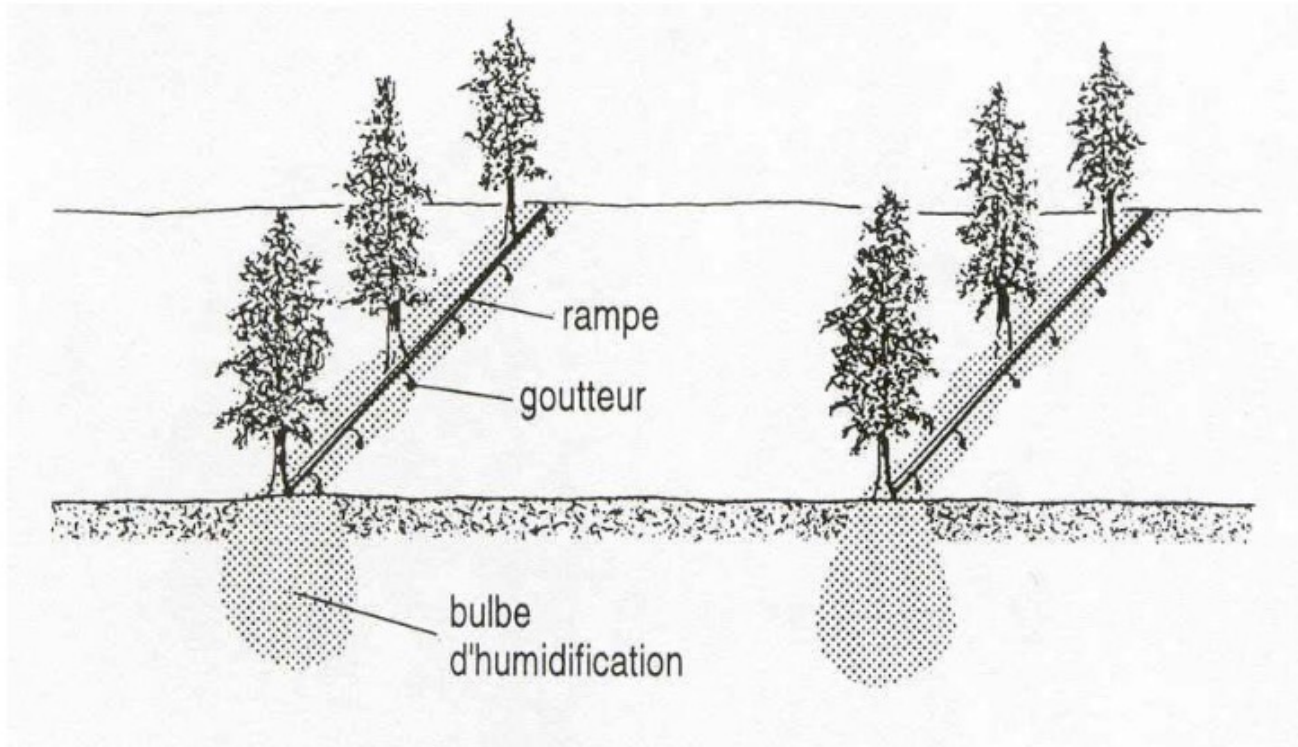


Water is delivered by drippers, which function at low pressure (<1 bar) and punctually deliver a flowrate of max 10 l/h

This system is the most used worldwide and so we shall concentrate on this one.


Principal factors governing micro-irrigation

- soil characteristics → bulb shape and dripper density
- water quality → risk of clogging and soil salinisation
- topography → uniformity of distribution
- type of crops

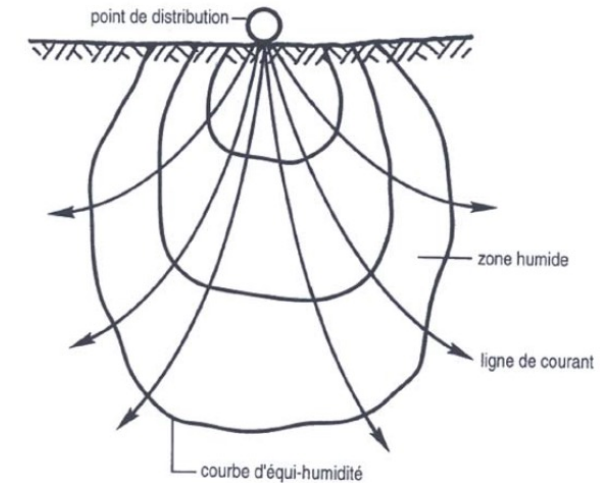


General deployment

- **water point** (pressure line from surface or GW sources)
- **head installation** (to control, regulate, filter, integrate, etc.)
- **network of main pipes** (generally buried, in PVC or PE)
- **network of secondary pipes** (manifolds) (buried or above ground, PVC or PE)
- **ramps** supplying the distributors (generally in flexible PE, diameter: 10 - 30 mm)
 - laid on the ground
 - laid above ground

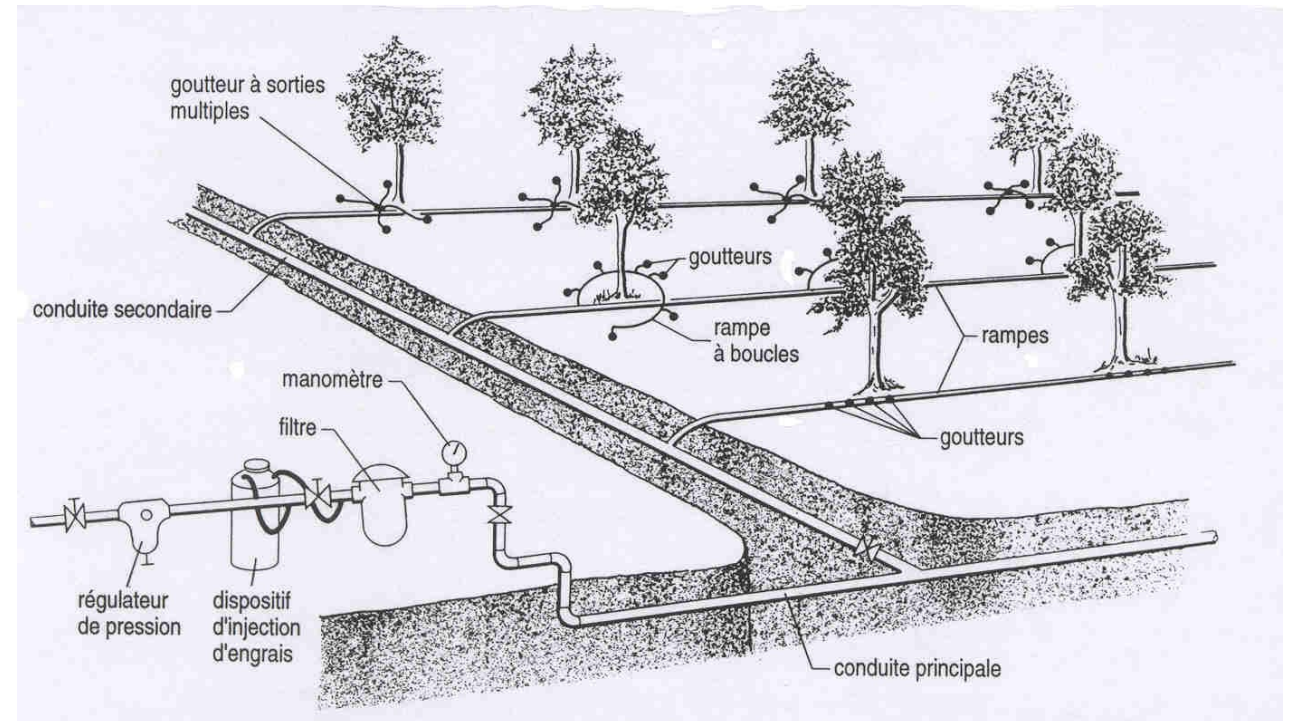


Head installation example



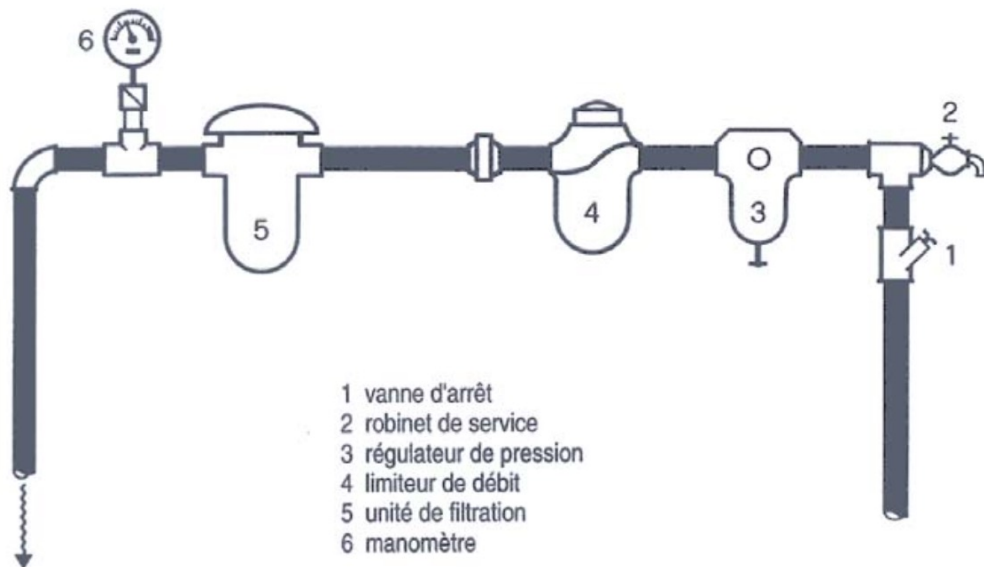


General scheme

- Generally fixed networks
- Easy to automate

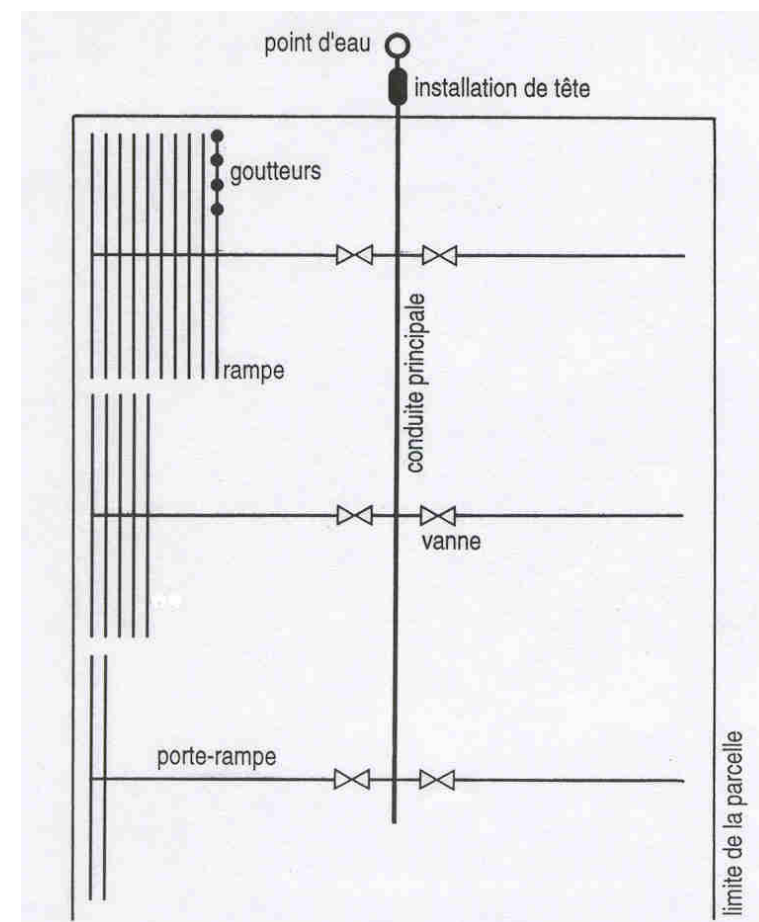

Ramps deployment

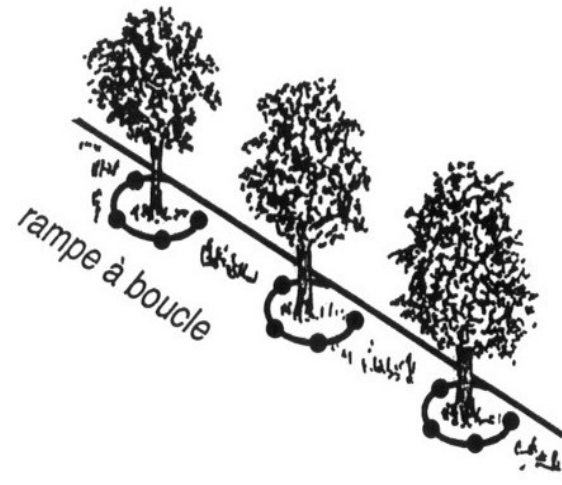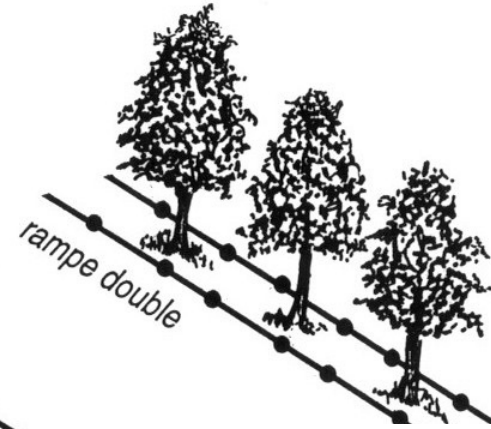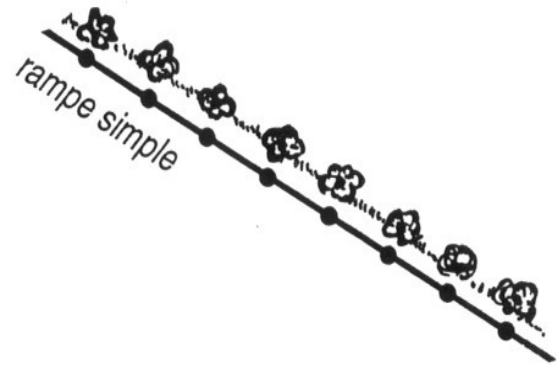


Classification of the drippers

- Ramp mounting method
- Number of outlets
- Pressure dissipation mode



Dripper in derivation



Grooved end


Online dripper

Grooved end



Inserted into the pipe, after cutting, by means of 2 fluted end pieces

Integrated dripper

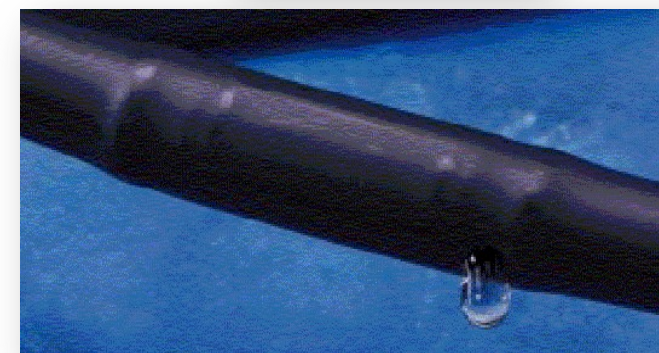

Inserted into the pipe as it is extruded; the pipe is not severed

Drippers choice

- type of crops
- soil type
- topography
- water quality
- financial resources, etc.

Desired characteristics

- Low, regular flow rate (qq litres per hour)
- Low sensitivity to pressure variations
- Orifices of appropriate diameter d:

$d < 0.5 \text{ mm} \rightarrow$ high susceptibility

$0.5 < d < 1.0 \text{ mm} \rightarrow$ medium susceptibility

$d > 1.0 \text{ mm} \rightarrow$ low susceptibility

- Cheap solution*

→ Choice = compromise between technical and economic requirements

* Drippers may represent 25 to 60% of the cost of the network

Special parts



Raccord



T

Vanne



Coude



Collier de prise



Réduction



Bouchon
fin de ligne

Hydraulic functioning of drippers

$$q = bH^\beta$$

b: dripper constant

β : flow characteristic

Values of β :

- laminar flow (capillaries, porous pipes)

$$\beta \cong 1$$

- partially turbulent regime

drippers with path $0.5 < \beta < 0.8$

- turbulent regime

➤ *orifice drippers* $\beta \cong 0.5$

➤ *vortex drippers* $\beta \cong 0.4$

➤ *compensated drippers* $0 < \beta < 0.25$

$$q = bH^\beta$$

