


ME-445 AERODYNAMICS
Exercise 03
Week 2

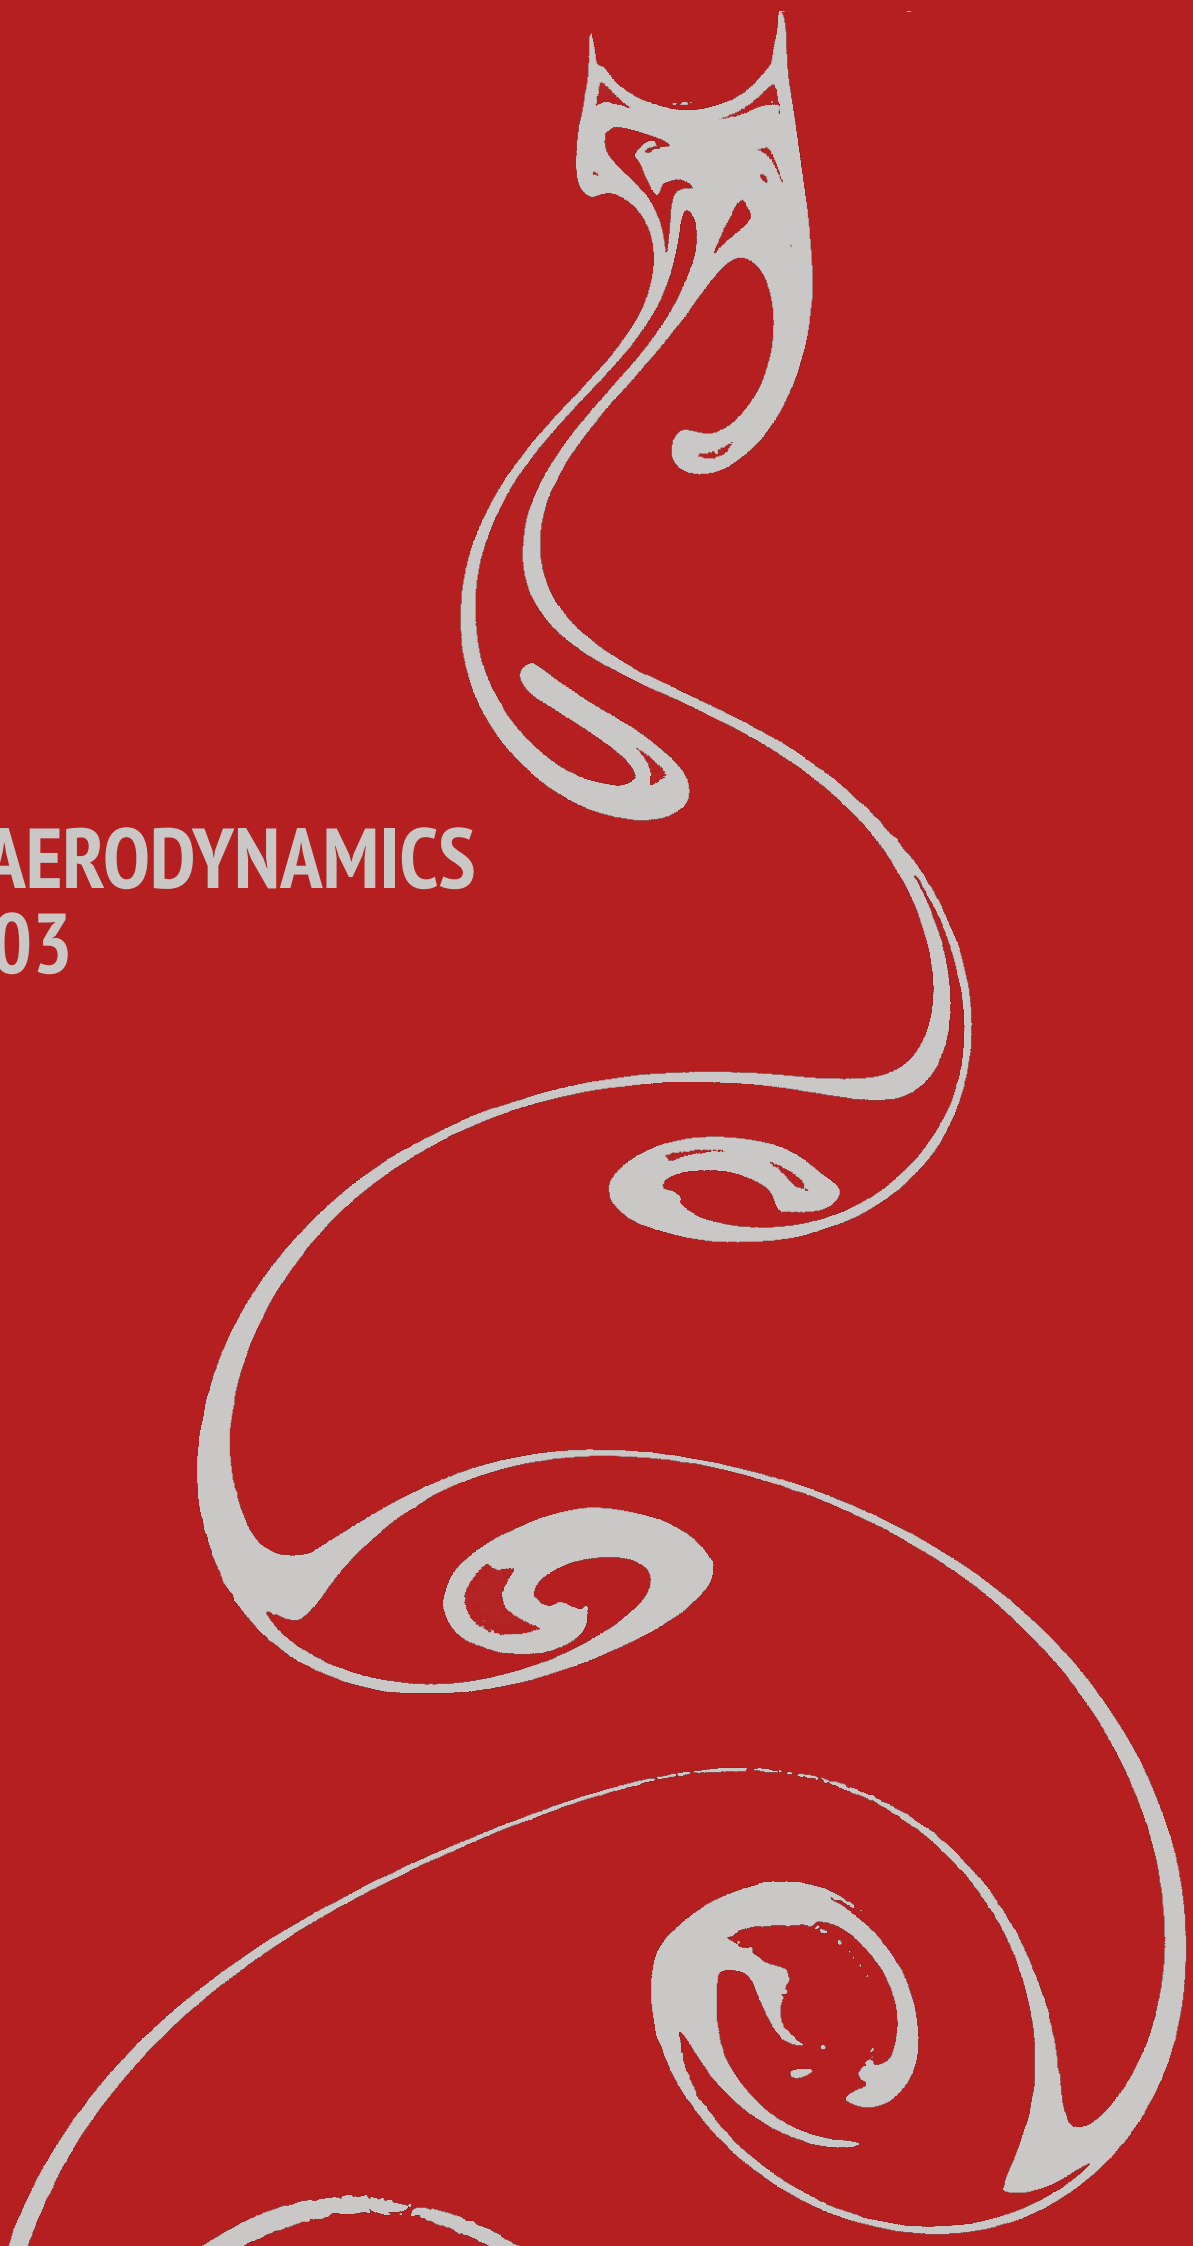

Formula sheet

Cylindrical coordinates

$$\nabla \vec{u} = \left(\frac{\partial v_r}{\partial r}, \frac{1}{r} \frac{\partial v_\theta}{\partial \theta}, 0 \right)$$

$$\nabla \cdot \vec{u} = \frac{1}{r} \frac{\partial(rv_r)}{\partial r} + \frac{1}{r} \frac{\partial v_\theta}{\partial \theta}$$

$$\nabla \times \vec{u} = \left(0, 0, \frac{1}{r} \left[\frac{\partial(rv_\theta)}{\partial r} - \frac{\partial v_r}{\partial \theta} \right] \right)$$

Potential flow

$$v_r = \frac{\partial \phi}{\partial r} = \frac{1}{r} \frac{\partial \psi}{\partial \theta}, \quad v_\theta = \frac{1}{r} \frac{\partial \phi}{\partial \theta} = -\frac{\partial \psi}{\partial r}$$

Uniform parallel flow $w = \phi + i\psi = U_\infty e^{-i\alpha} z$

Potential vortex in z_0 $w = -\frac{i\gamma}{2\pi} \ln(z - z_0)$

Point source or sink in z_0 $w = \frac{Q}{2\pi} \ln(z - z_0)$

Source-sink doublet in z_0 $w = \frac{\mu}{2\pi(z - z_0)}$

$$\frac{dw}{dz} = u - iv$$

Milne-Thomson circle theorem:

$$g(z) = w(z) + \overline{w\left(\frac{a^2}{\bar{z}}\right)}$$

Thin airfoil theory

For a camber line with:

$$\frac{dy_c}{dx} = A_0 + \sum_{n=1}^{\infty} A_n \cos n\theta$$

$$\frac{x}{c} = \frac{(1 - \cos \theta)}{2}$$

we know:

$$k = 2U_\infty \left[(\alpha - A_0) \frac{\cos \theta + 1}{\sin \theta} + \sum_{n=1}^{\infty} A_n \sin n\theta \right]$$

$$A_0 = \frac{1}{\pi} \int_0^\pi \frac{dy_c}{dx} d\theta$$

$$A_n = \frac{2}{\pi} \int_0^\pi \frac{dy_c}{dx} \cos n\theta d\theta$$

$$C_l = 2\pi\alpha + \pi(A_1 - 2A_0)$$

$$C_{m,1/4} = -\frac{\pi}{4}(A_1 - A_2)$$

$$x_{cp} = \frac{1}{4} + \frac{\pi}{4C_l}(A_1 - A_2)$$

Finite wings with $AR=b^2/S$

Sign convention:

if induced velocity points downward: $w(y) > 0$, $\alpha_i(y) > 0$

if induced velocity points upward: $w < 0$, $\alpha_i < 0$

Prandtl's lifting-line theory

$$U_\infty \alpha_i(y_0) = w(y_0) = -\frac{1}{4\pi} \int_{-b/2}^{b/2} \frac{(d\Gamma/dy)}{y - y_0} dy$$


$$\alpha(y_0) = \alpha_{eff}(y_0) + \alpha_i(y_0)$$

Elliptical loading $\Gamma(y) = \Gamma_0 \sqrt{1 - \left(\frac{2y}{b}\right)^2}$

$$w = \frac{\Gamma_0}{2b}$$

$$\alpha_i = \frac{C_L}{\pi AR}$$

$$C_{D,i} = \frac{C_L^2}{\pi AR}$$



General loading $\Gamma(\theta) = 2bU_\infty \sum_{n=1}^{\infty} A_n \sin n\theta$

$$w(\theta) = U_\infty \sum_{n=1}^{\infty} n A_n \frac{\sin n\theta}{\sin \theta}$$

$$C_L = \pi A_1 AR$$

$$C_{D,i} = \frac{C_L^2}{\pi AR} (1 + \delta) \text{ with } \delta = \sum_{n=2}^{\infty} n (A_n/A_1)^2$$

Boundary Layer

Flat plate **laminar** boundary layer

$$\frac{\delta}{x} = \frac{5}{\sqrt{Re_x}} \quad \text{boundary layer growth}$$

$$C_f = \frac{1.328}{\sqrt{Re_x}} \quad \text{skin friction drag coefficient}$$

Flat plate **turbulent** boundary layer

$$\frac{\delta}{x} = \frac{0.37}{Re_x^{1/5}} \quad \text{boundary layer growth}$$

$$C_f = \frac{0.074}{Re_x^{1/5}} \quad \text{skin friction drag coefficient}$$

Miscellaneous

θ	0°	30°	45°	60°	90°
$\sin \theta$	0	$\frac{1}{2}$	$\frac{\sqrt{2}}{2}$	$\frac{\sqrt{3}}{2}$	1
$\cos \theta$	1	$\frac{\sqrt{3}}{2}$	$\frac{\sqrt{2}}{2}$	$\frac{1}{2}$	0

water

kinematic viscosity $\nu = 1 \times 10^{-6} \text{ m}^2 \text{ s}^{-1}$

density $\rho = 1000 \text{ kg m}^{-3}$

air

kinematic viscosity $\nu = 1.5 \times 10^{-5} \text{ m}^2 \text{ s}^{-1}$

density $\rho = 1.2 \text{ kg m}^{-3}$

$$\sin (x \pm y)=\sin x \cos y \pm \cos x \sin y$$

$$\cos (x \pm y)=\cos x \cos y \mp \sin x \sin y$$

$$\cos 2 \theta=2 \cos ^2 \theta-1$$

$$\sin 2 \theta=2 \sin \theta \cos \theta$$

$$\sin 3 \theta=3 \sin \theta-4 \sin ^3 \theta$$

$$\cos 3 \theta=4 \cos ^3 \theta-3 \cos \theta$$

$$\int_0^{\pi} \cos \theta \mathrm{d} \theta=0$$


$$\int_0^{\pi} \sin \theta \mathrm{d} \theta=2$$

$$\int_0^{\pi} \cos ^2 \theta \mathrm{d} \theta=\int_0^{\pi} \sin ^2 \theta \mathrm{d} \theta=\frac{\pi}{2}$$


$$\int_0^{\pi} \frac{\cos n \theta}{\cos \theta-\cos \theta_1} \mathrm{d} \theta=\pi \frac{\sin n \theta_1}{\sin \theta_1} \quad n=0,1,2, \ldots$$

$$\int_0^{\pi} \frac{\sin n \theta \sin \theta}{\cos \theta-\cos \theta_1} \mathrm{d} \theta=-\pi \cos n \theta_1 \quad n=1,2,3, \ldots$$


1. Consider an executive jet transport patterned after the Cessna 560 Citation V. The airplane is cruising at a velocity of 790 km h^{-1} at an altitude of 10 km , where the ambient air density is 0.41 kg m^{-3} . The weight and wing planform areas of the airplane are 6800 kg and 32 m^2 , respectively. The drag coefficient at cruise is 0.015 .

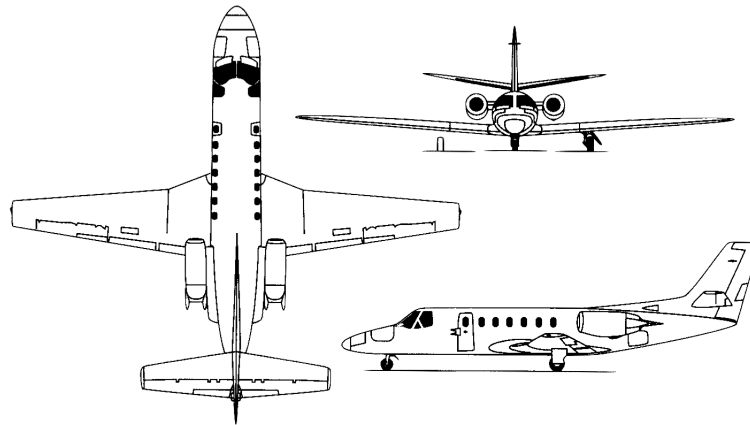


- (a) Calculate the lift coefficient and the lift-to-drag ratio at cruise flight.

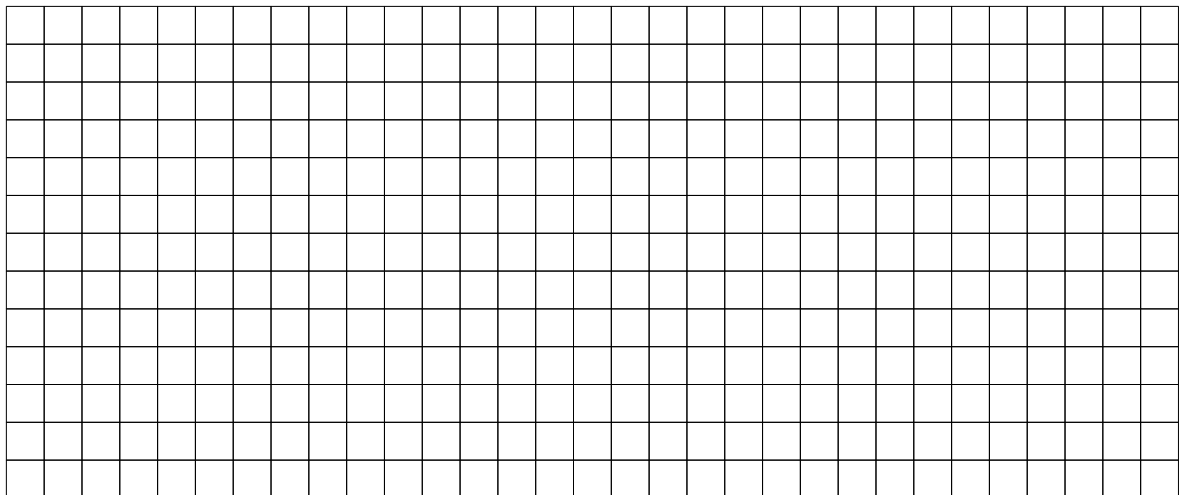


- (b) Assume that the airplane takes-off when the speed is 240 km h^{-1} . It has a minimum steady flight speed of 160 km h^{-1} at standard conditions, below this velocity the airplane will stall and can no longer maintain its altitude. The maximum take-off weight is 7200 kg . The ambient air density at standard sea level is 1.22 kg m^{-3} . Find the value of the maximum lift coefficient for the airplane.

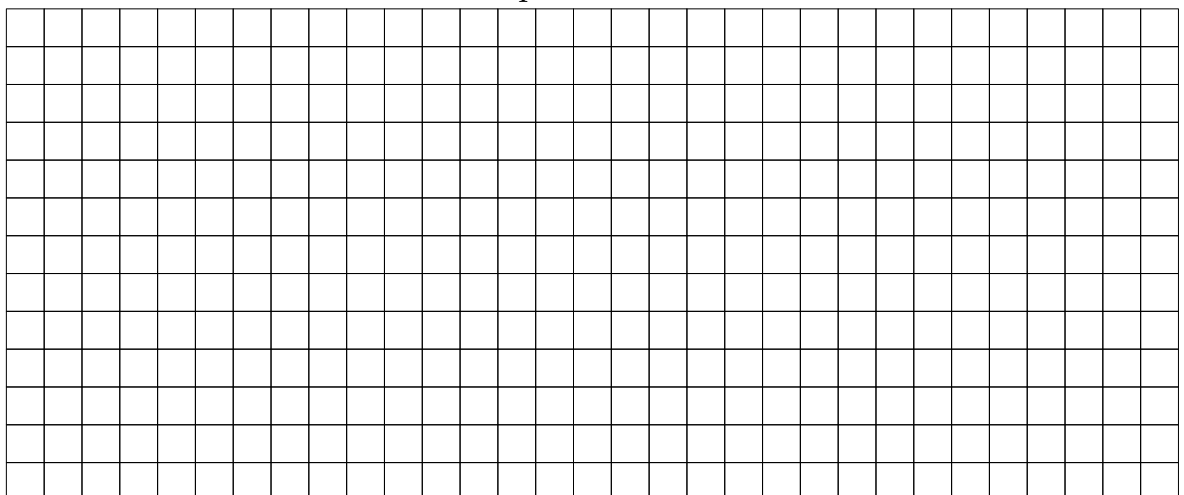

- (c) Geneva airport's concrete runway is the longest in Switzerland, with a length of 3900 m. The Cessna 560 Citation V has two JT15D5D engines producing 13.6 kN of net thrust force T_n each, resulting in constant acceleration of the aircraft along the runway. Assuming the same take-off speed and air density as in the previous question, calculate the proportion of the runway the executive jet will require to take off.


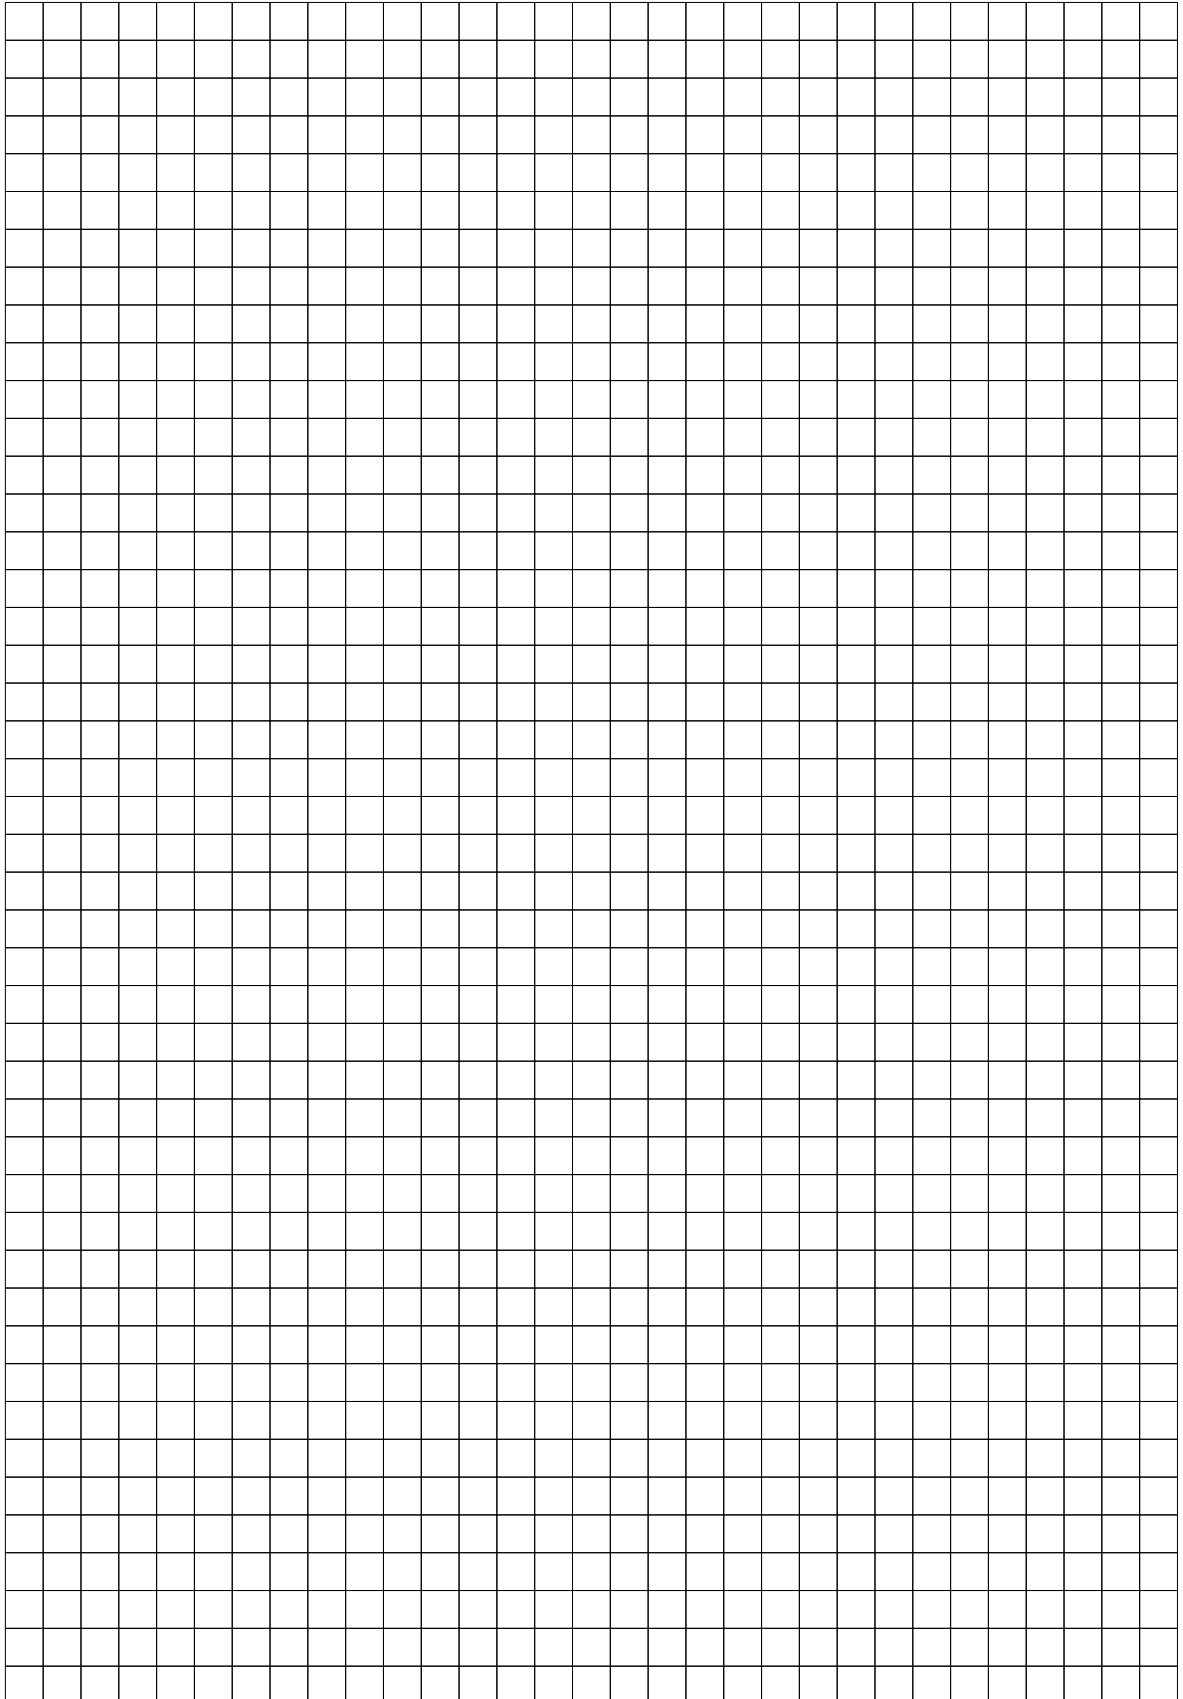


- (d) On a warm summer day, Geneva's air density is 1.10 kg m^{-3} . Calculate the proportion of the runway the executive jet will require to take off on this warm summer day.

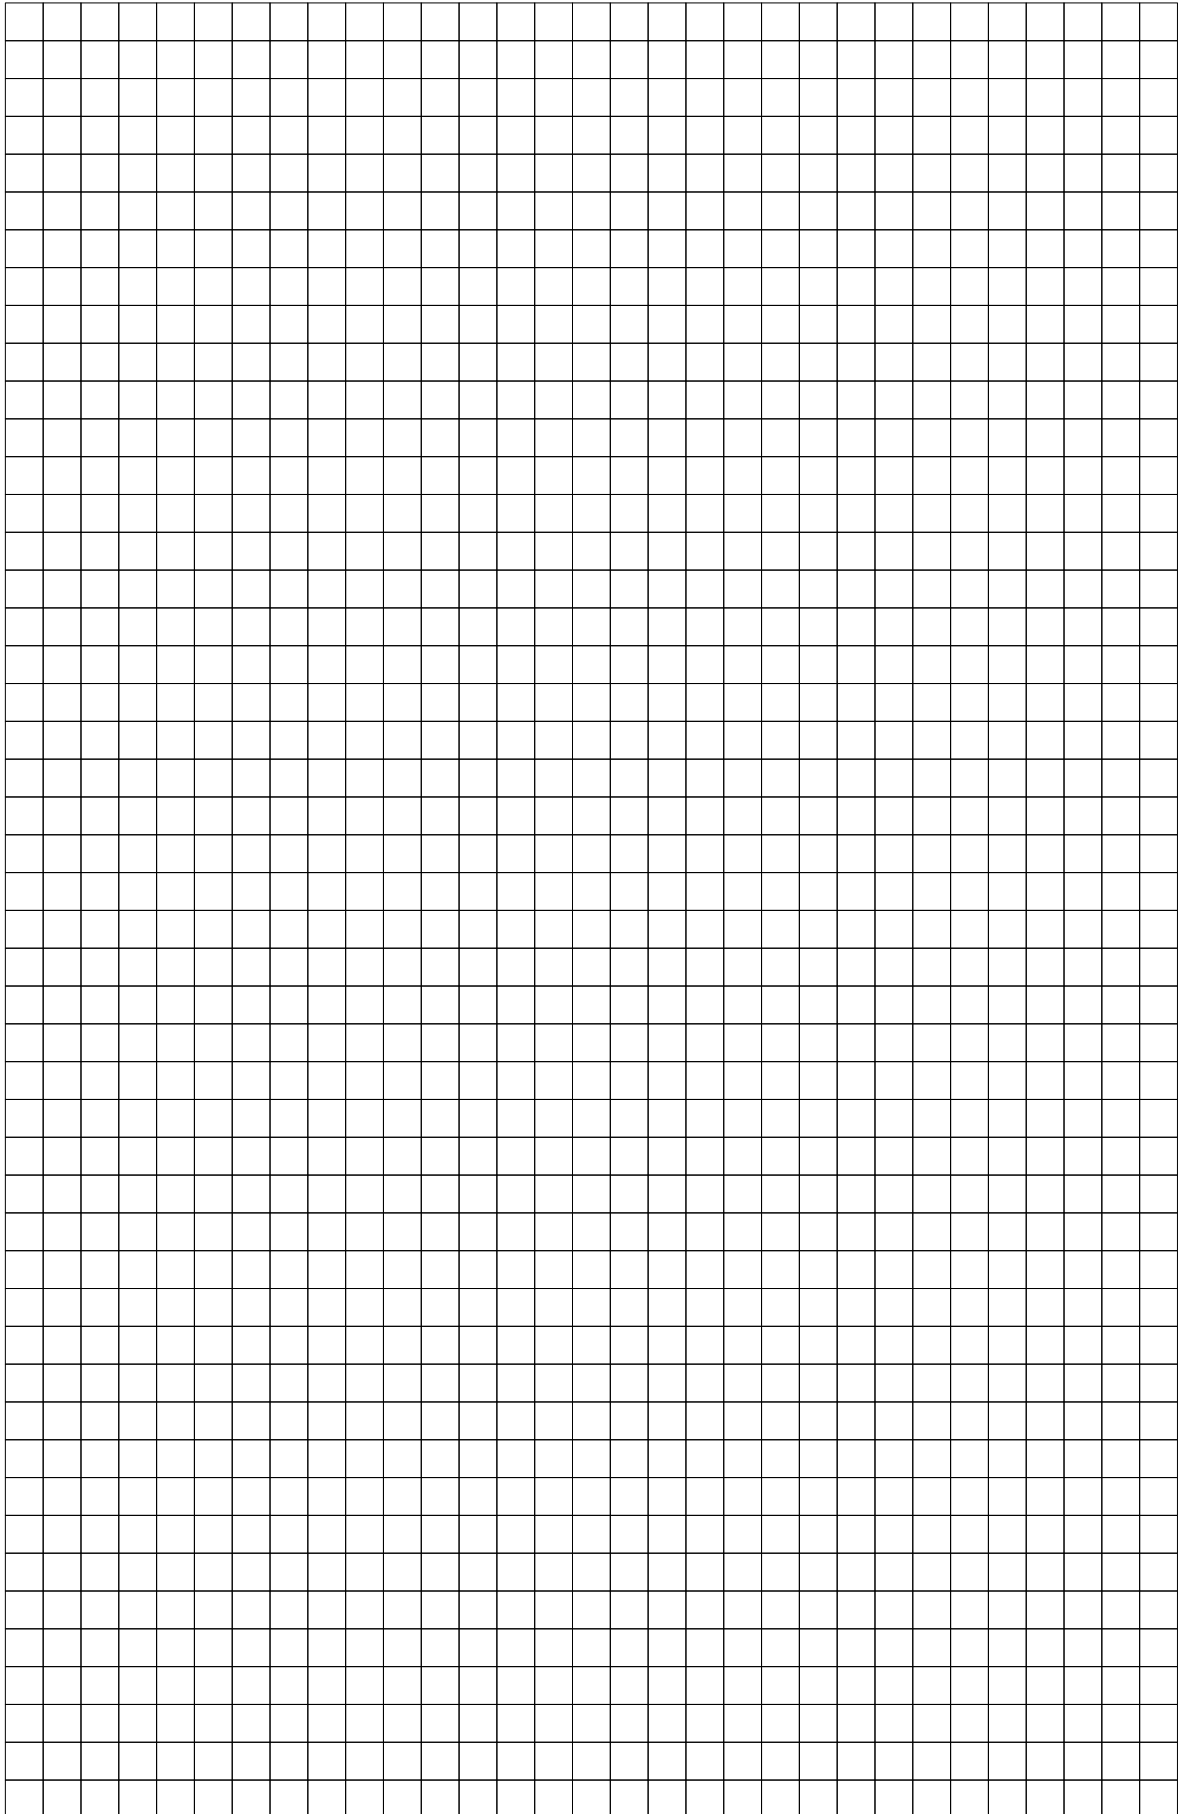

2. Consider a Seversky P-35. The wing planform area and the gross weight of the fighter aircraft are 20.5 m^2 and 25 kN , respectively.

- (a) Calculate the power required for the aircraft to fly in steady level flight with $C_L = 0.15$ and $C_D = 0.0275$ at standard conditions ($\rho = 1.225 \text{ kg m}^{-3}$).

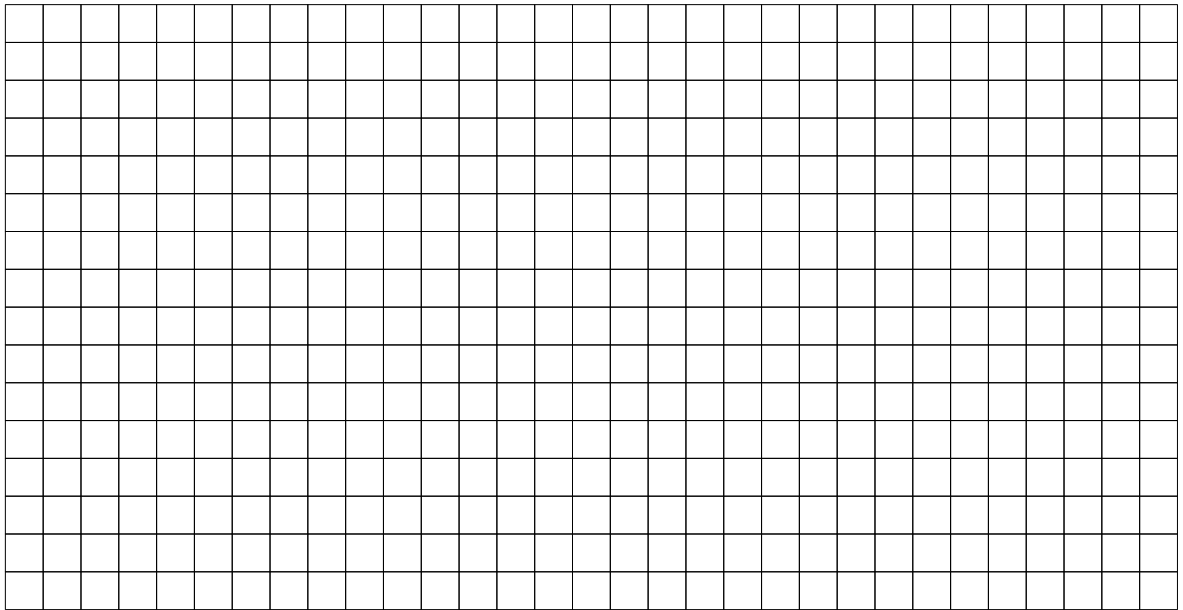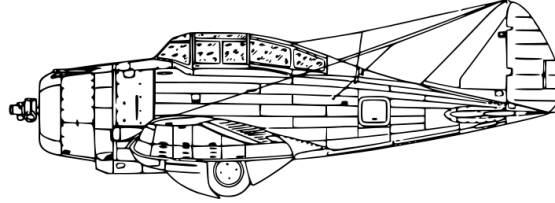


- (b) A important performance characteristics of an airplane is its maximum rate-of-climb B . The rate-of-climb is the increase in altitude per unit of time and it is proportional to the difference in maximum power available from the engine and the power required by the airplane to overcome aerodynamic drag. This difference is referred to as the excess power:

$$B = \frac{\text{excess power}}{W} ,$$

where W is the weight of the airplane.


Calculate B for the P-35 fighter equipped with a Pratt & Whitney R-1830-45 engine rated at 788 kW .

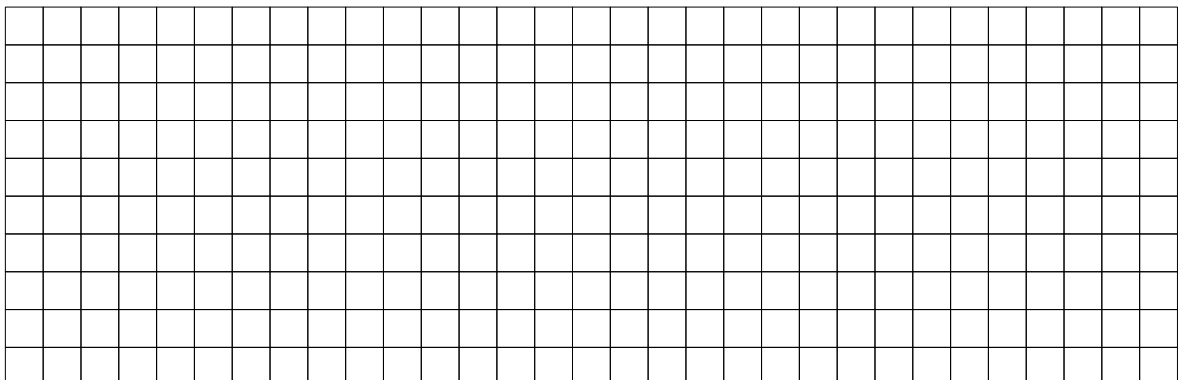


3. The pressure distribution over a section of a 2D wing at 4° of incidence may be approximated as follows:


- **suction side:** c_p constant at -0.8 from the leading edge to 60 % chord, then increasing linearly to 0.1 at the trailing edge
- **pressure side:** c_p constant at -0.4 from the leading edge to 60 % chord, then increasing linearly to 0.1 at the trailing edge.

(a) Draw the pressure distribution.

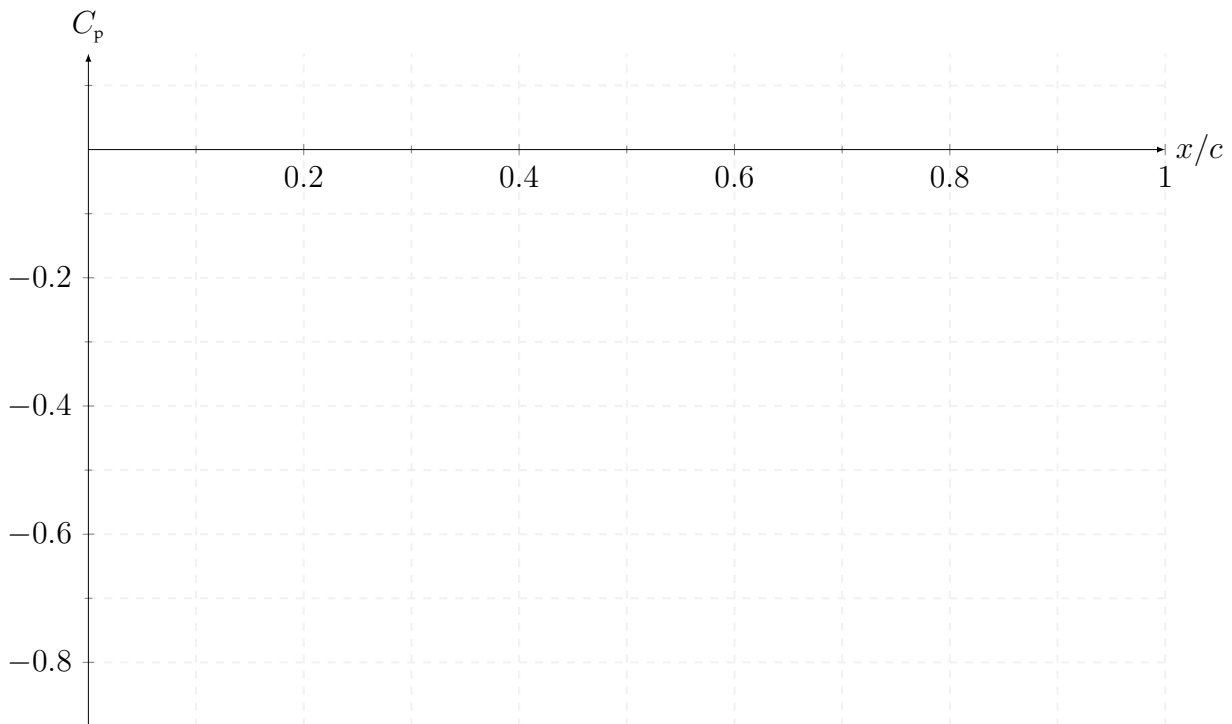

(b) Estimate the lift coefficient and the pitching moment coefficient about the leading edge due to lift.

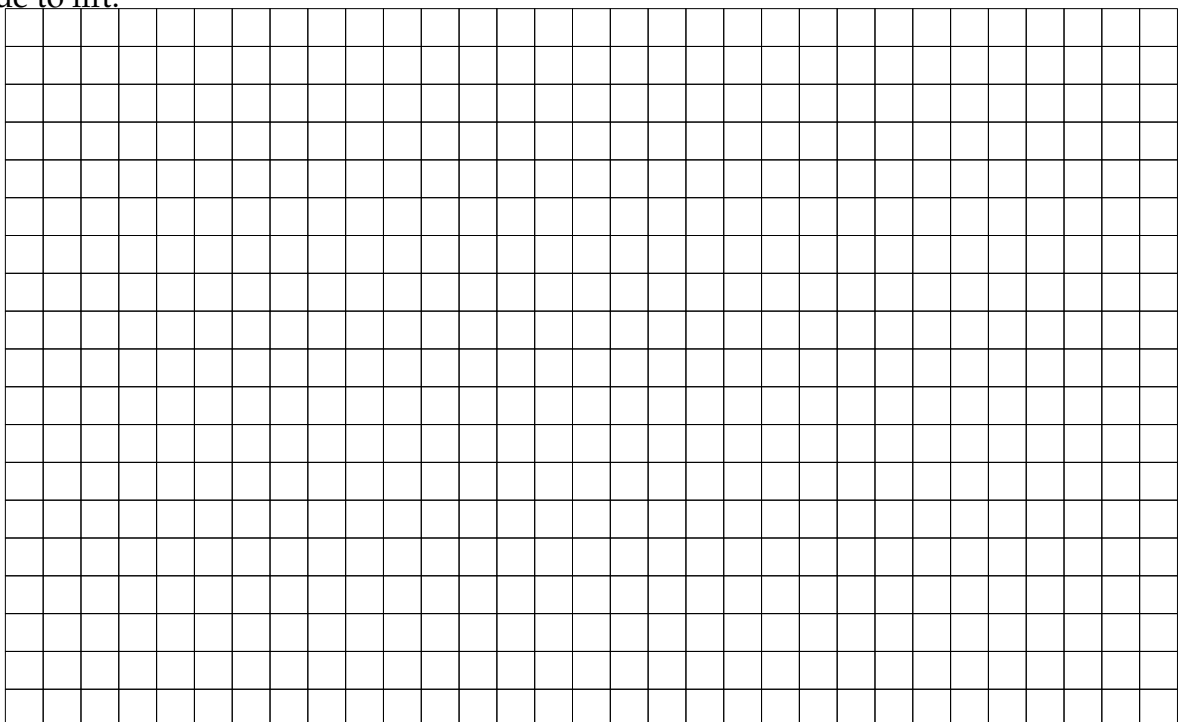

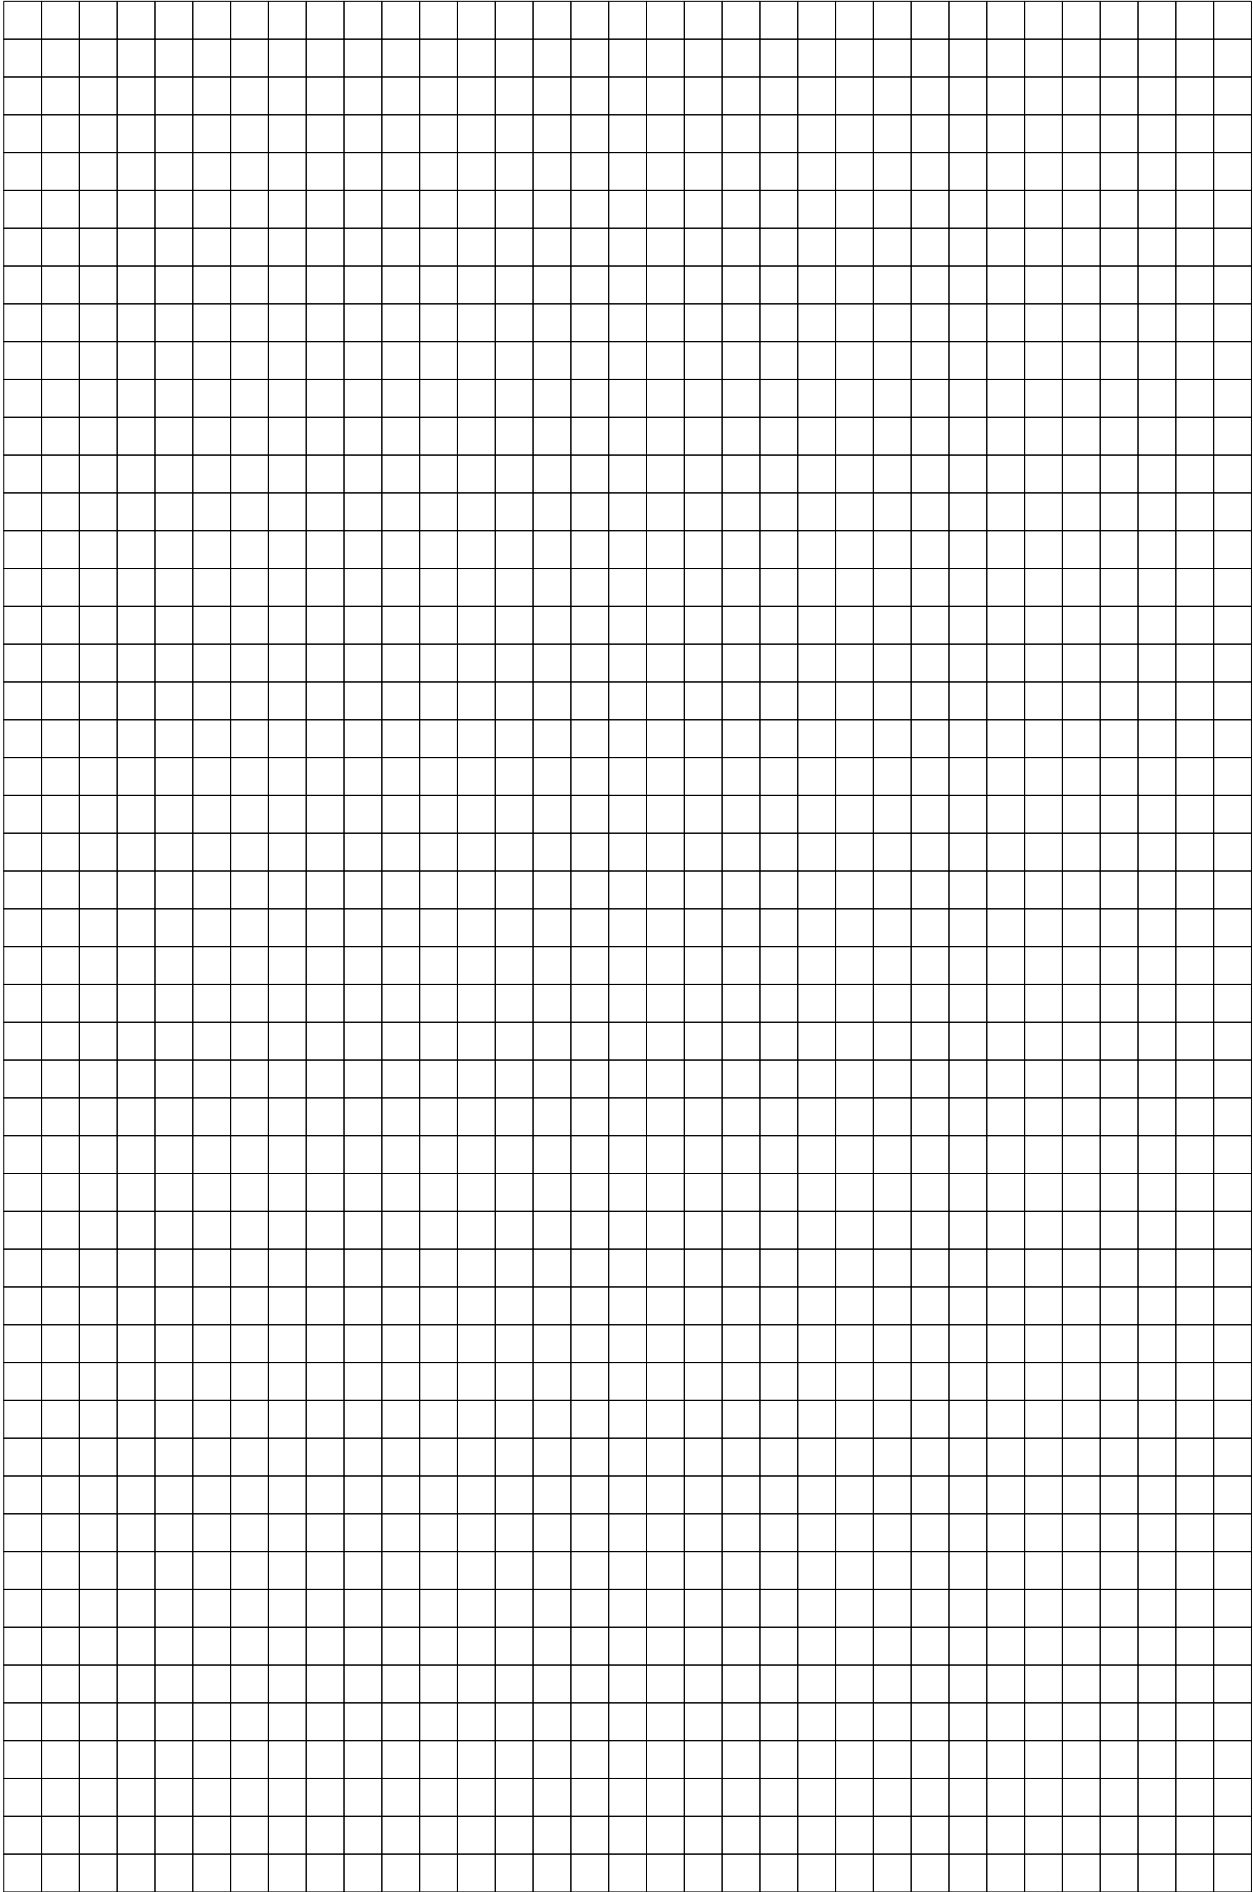

4. Consider a long dowel with a semicircular cross section. The dowel is immersed in a flow of air, with its axis perpendicular to the flow. The rounded section of the dowel is facing the flow. We call this rounded section the *front face* of the dowel. The radius of the semicircular cross section is $R = 0.5 \text{ m}$. The velocity of the flow upstream of the dowel is $u_\infty = 10 \text{ m s}^{-1}$. Assume inviscid flow. The pressure and the velocity of the flow along the surface of the rounded front face of the dowel are a function of the location along the surface, denoted by angle θ . Along the front rounded surface $v = v(\theta) = 2u_\infty \sin \theta$ and p varies accordingly. On the flat back face, the pressure is constant and equal to $p_B = p_\infty - 0.7\rho_\infty u_\infty^2$. The free-stream density is $\rho_\infty = 1.225 \text{ kg m}^{-3}$. Calculate the aerodynamic force per unit depth exerted by the surface pressure distribution on 2D the dowel.

