
Heat recovery

**Optimal DT_{min} value
at the process level**

Prof. François Maréchal

Conclusions of last lecture

- DTmin is calculated for one typical heat exchanger
 - trade off investment /energy savings in a given economical context
- Hot and cold streams for the overall system
 - Composite curves
- From the DTmin assumptions
 - Maximum heat recovery
 - Minimum hot&cold utility
 - Energy savings quantification
- Algorithm for calculating maximum heat recovery
 - Problem table
 - Corrected temperature
 - Heat cascade
- Pinch point => topologic locator
 - Penalizing heat exchangers
 - 3 independent zones
- More-in - More-out principle

- What about the energy-capital trade-off ?

- Cost of Energy [CHF/year]

- Hot Utility :

- $[CHF/year] : \dot{Q}_{MER_{HU}}(\Delta T_{min})[kW] \cdot c_{HU}[CHF/kWh] \cdot t_{op}[h/year]$

- Cold Utility :

- $[CHF/year] : \dot{Q}_{MER_{CU}}(\Delta T_{min})[kW] \cdot c_{CU}[CHF/kWh] \cdot t_{op}[h/year]$

- Refrigeration :

- $[CHF/year] : \dot{Q}_{MER_{RU}}(\Delta T_{min})[kW] \cdot c_{RU}[CHF/kWh] \cdot t_{op}[h/year]$


- Investment : [CHF/year]

- $[CHF/year] : \frac{1}{\tau}[1/year] \cdot \sum_{e=1}^{n_{htx}} (I(A_e(\Delta T_{min}))[CHF])$

- ? ΔT_{min} ?

Estimating heat exchanger network cost

Define vertical sections with constant cp

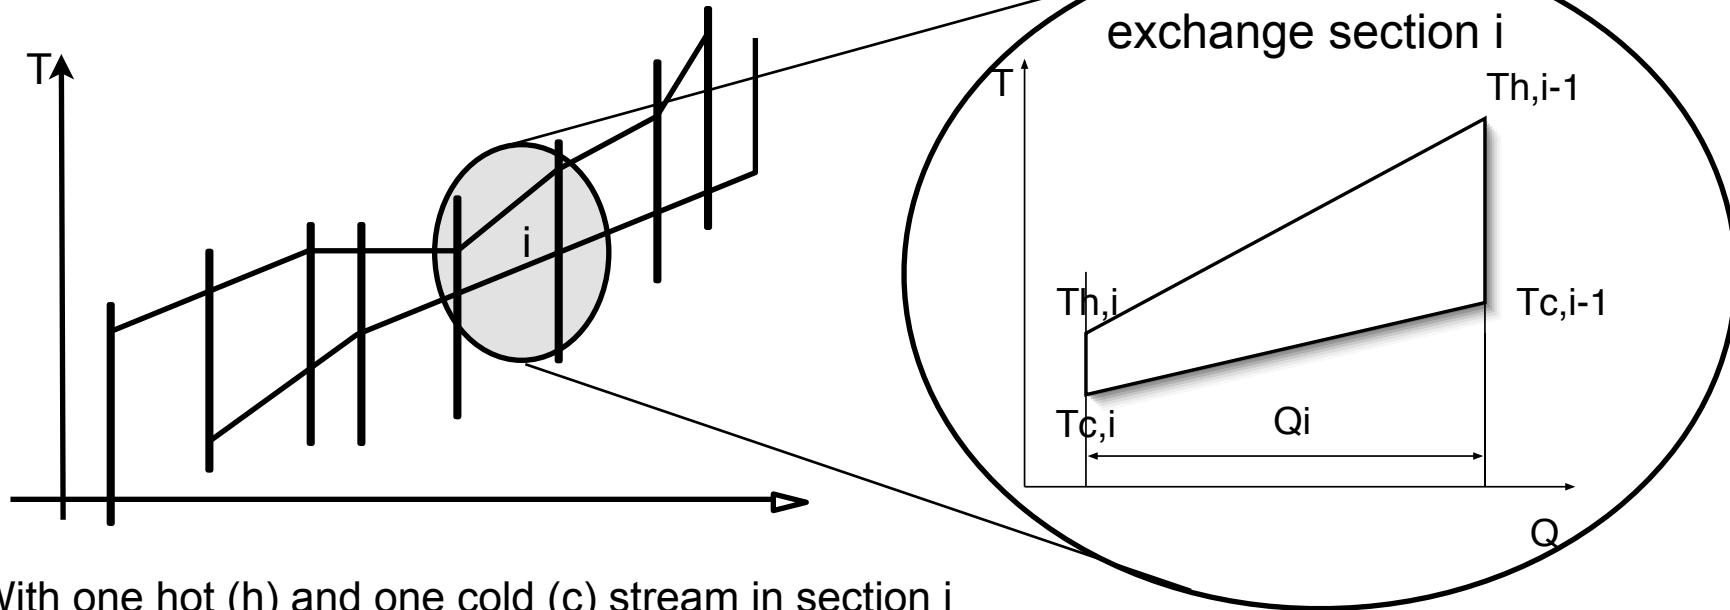

With one hot (h) and one cold (c) stream in section i

$$A_{h,ci} = \frac{(Q_{h,c})_i}{(U_{h,c})_i * \Delta(T_{lm})_i} = \left(\frac{1}{h_{i,h}} + \frac{1}{h_{i,c}} \right) * \frac{Q_i}{\Delta(T_{lm})_i}$$


With

$$(\Delta T_{lm})_i = \frac{(T_{h,i} - T_{c,i}) - (T_{h,i-1} - T_{c,i-1})}{\ln\left(\frac{T_{h,i} - T_{c,i}}{T_{h,i-1} - T_{c,i-1}}\right)}$$

The hot and cold composites are considered as an overall hot stream to be cooled down and a cold stream to be heated up. The heat recovery is therefore considered as a counter current heat exchanger made of fluids with linear segments (constant cp is the condition to apply the logarithmic mean formula). The linear segments define zones with constant cp (by defining vertical lines). In each vertical section, the log mean temperature difference can be calculated.

Vertical section with several streams

A_i is the total heat exchange area in the vertical section i

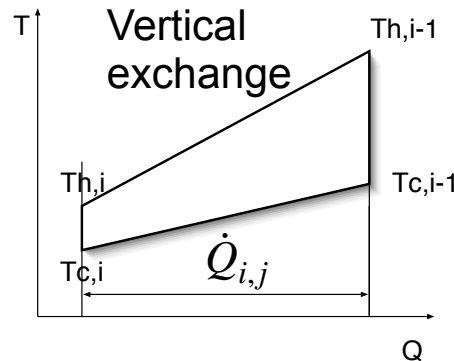

$$A_i = \frac{1}{(\Delta T_{lm})_i} * \left(\sum_{j=1}^{(n_{streams})_i} * \left(\frac{\dot{Q}_{i,j}}{h_{i,j}} \right) \right)$$


With

$$(\Delta T_{lm})_i = \frac{(T_{h,i} - T_{c,i}) - (T_{h,i-1} - T_{c,i-1})}{\ln\left(\frac{T_{h,i} - T_{c,i}}{T_{h,i-1} - T_{c,i-1}}\right)}$$

Logarithmic mean temperature difference of the vertical section i

when several streams are in the same vertical section, they see the log mean temperature difference. The area is therefore a sum of the contributions of each of the streams in the vertical section. The sum concern the ratio heat load over film heat transfer coefficient of the corresponding stream j in section i .

Total heat exchange area

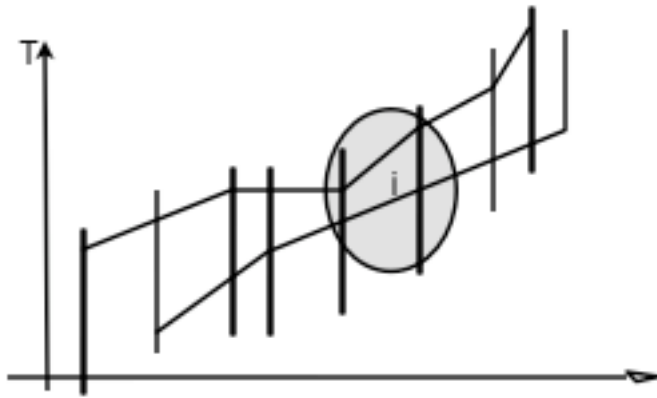

$$A_{total} = \sum_{i=1}^{n_{vertical\ exchanges}} A_i$$

$$A_{total} = \sum_{i=1}^{n_{vertical\ exchanges}} \frac{1}{(\Delta T_{lm})_i} * \left(\sum_{j=1}^{(n_{streams})_i} \left(\frac{\dot{Q}_{i,j}}{h_{i,j}} \right) \right)$$

Total investment

$$[CHF/year] : \frac{1}{\tau} [1/year] \cdot \sum_{e=1}^{n_{htx}} (I(A_e(\Delta T_{min}))[CHF])$$

$$A_{total} = \sum_{i=1}^{n_{vertical\ exchanges}} A_i$$

What is the cost of the heat exchangers ? => we need the number of heat exchangers and we need the area of the heat exchangers, if possible before calculating the heat exchanger network.


What is the number of heat exchangers ?

	T_{in} [C]	T_{out} [C]	$\dot{M}cp$ [kW/C]	$\dot{Q}$ [kW]	α [kW/C/m ²]
A	20	130	-1.5	-165.0	0.5
B	80	140	-4.0	-240.0	0.5
C	160	60	+2.5	250.0	0.5
D	150	50	+2.0	200.0	0.5

Table 1: Streams definition

Minimum number of units

from the graph theory

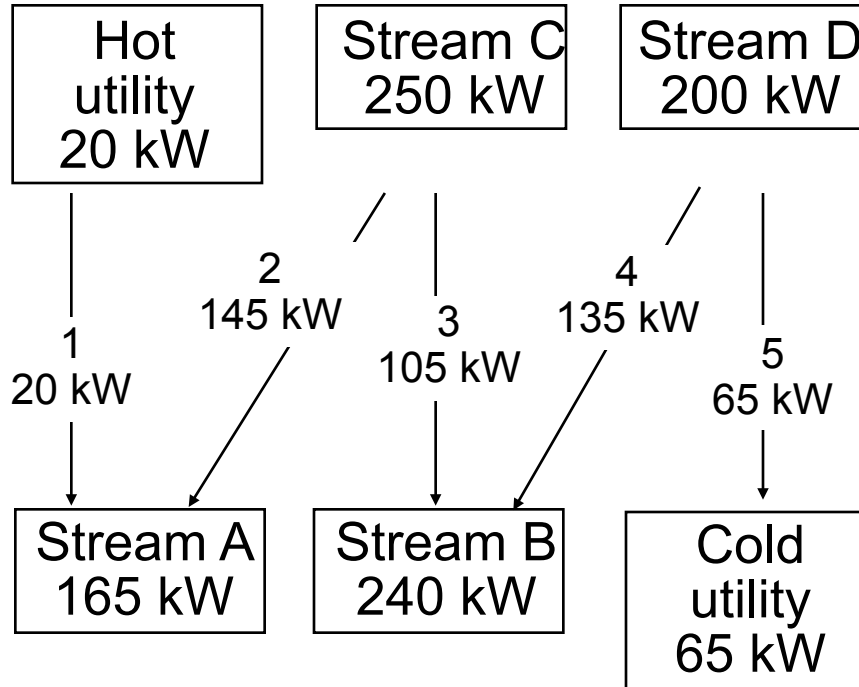

3 Sources : hot streams

TOTAL = 470 KW

3 Sinks : Cold streams


TOTAL = 470 KW

$$\begin{array}{ccccccc} \text{Number} & & & & \text{Number} & & \text{Number} \\ \text{of} & = & \text{of} & + & \text{of} & - & \text{of} \\ \text{Exchangers} & & \text{streams} & & \text{Utilities} & & \text{independent} \\ & & & & & & \text{system} \\ & & & & & & \\ & & & & & & \\ 5 & = & 4 & + & 2 & - & 1 \end{array}$$

This is by applying the graph Theory from Leonhard Euler (1707-1783).


When the overall system is balanced, there is at least one independent sub-system

2 sub-systems

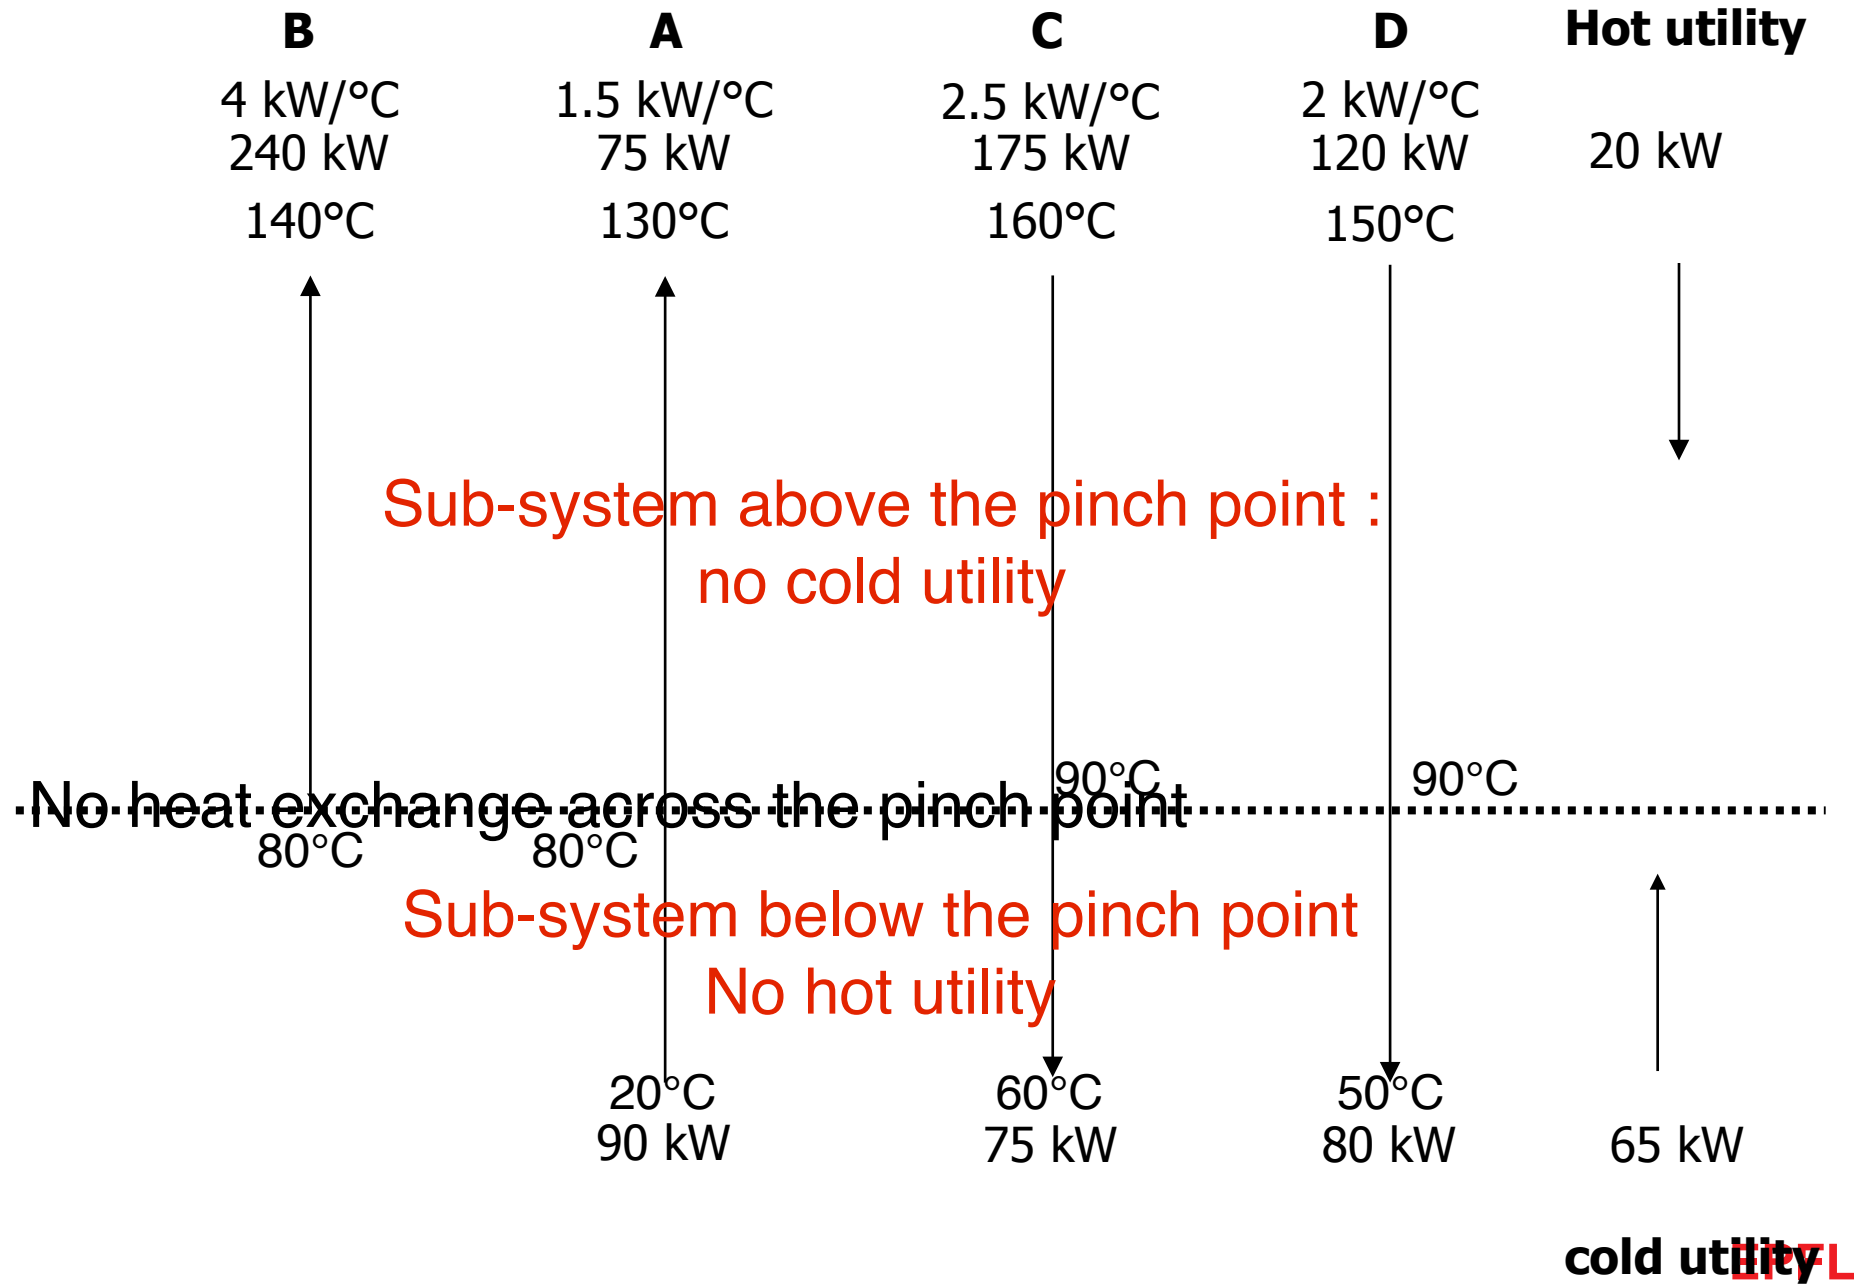

Minimum number of units : effect of pinch point

Above the pinch point : independent sub-system

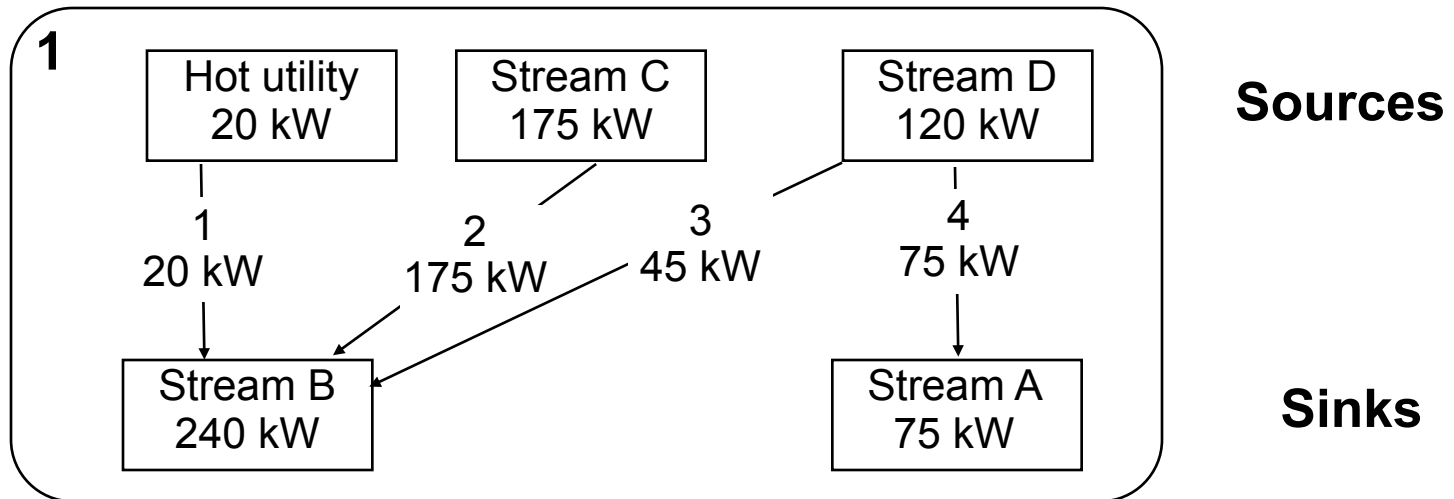


Number of Exchangers = Number of streams + Number of Utilities - Number of independent system

$$4 = 4 + 1 - 1$$

Minimum number of units : effect of pinch point

Below the pinch point : independent sub-system

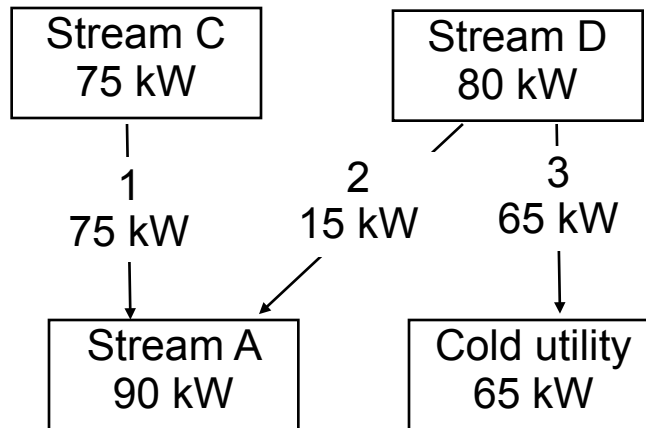


2 Sources : Hot streams

2 Sinks : cold streams


$$\begin{array}{ccccccc} \text{Number} & & \text{Number} & & \text{Number} & & \text{Number of} \\ \text{of} & = & \text{of} & + & \text{of} & - & \text{independent} \\ \text{Exchangers} & & \text{streams} & & \text{Utilities} & & \text{system} \\ 3 & = & 3 & + & 1 & - & 1 \end{array}$$

Overall system

Above the pinch

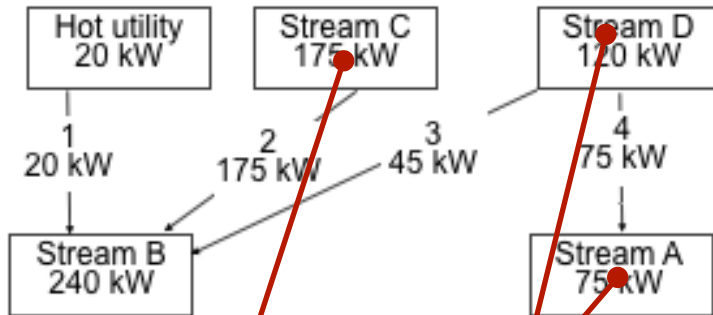

Below the pinch

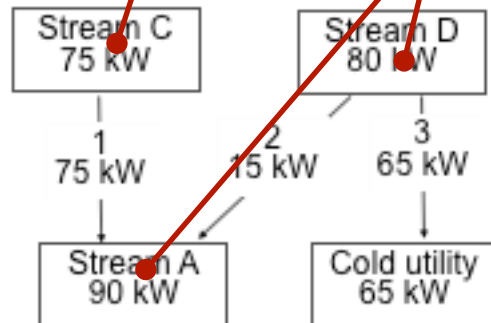

$$4 = 4 + 1 - 1$$

$$3 = 3 + 1 - 1$$

$$7 = 4 + 2 - 1 + (3 - 1)$$

A,B,C,D Hot,Cold

A,C,D

Minimum number of units

Pinch point = two independent sub-systems

Number of Independent sub-systems above the pinch point

Number of Independent sub-systems below the pinch point

$$U_{\min, MER} = (N_{above} - 1 - S_{above}) + (N_{below} - 1 - S_{below})$$

Number of streams above the pinch point

Number of streams below the pinch point

$$U_{\min, MER} = (N_{total} + N_{utility} - 1) + (N_{pinch} - 1) - (S_{above} + S_{below})$$

Total number of streams, including the utilities

Number of Independent sub-systems below and above the pinch point

Number of streams crossing the pinch point

Estimating the investments

Cost of 1 heat exchanger

$$I(A) = a + b (A)^c$$

0,6 - 0,8


Heat exchange area

$$A = \frac{\sum_i A_i}{U_{\min,mer}} = \frac{\sum_{i=1}^{nbT_{inter}} \sum_{j=1}^{nbstreams_i} \frac{\dot{Q}_i}{h_{j,i} * (\Delta T_{ln})_i}}{(N_{total} + N_{utility} - 1) + (N_{pinch} - 1) - (S_{above} + S_{below})}$$

$$\sum_{e=1}^{n_{htx}} (a + b(A_e(\Delta T_{min}))^c)[CHF] \simeq U_{\min,MER} \cdot (a + b(\frac{A_{tot}}{U_{\min,MER}})^c)[CHF]$$


we assume an equal repartition of the total area between the minimum number of heat exchangers

Cost estimation : over estimation

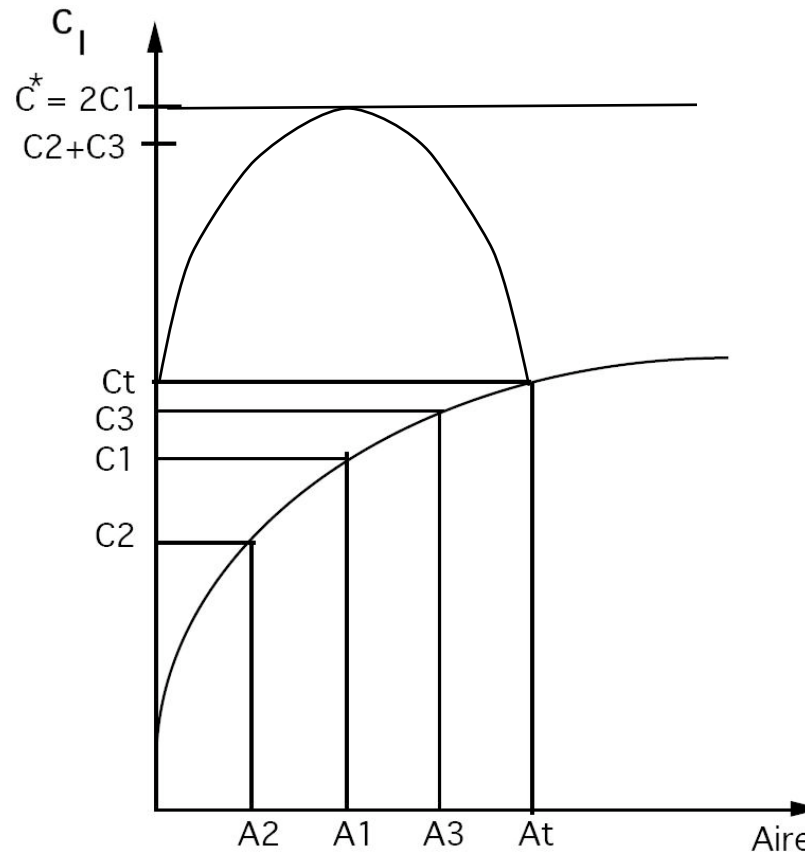

by assuming an equal repartition of the area over all the heat exchangers, we will overestimate the heat exchangers total cost.



Influence of ΔT_{min}

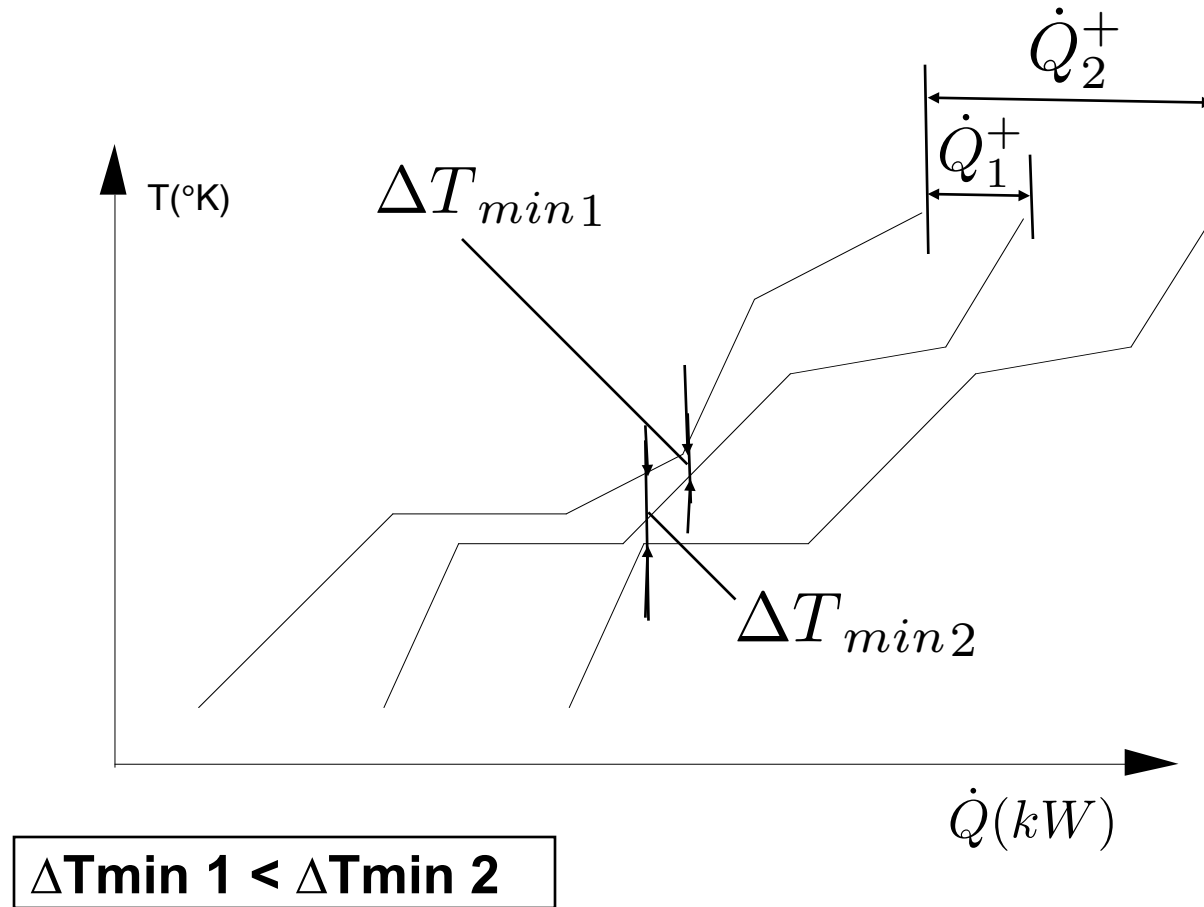

- $Q_1 < Q_2 \rightarrow$ Operating costs
- $\neq$ pinch points $\rightarrow \neq$ number of units & $\neq$ streams at the pinch point
- $A_1 > A_2 \rightarrow$ Investments



Changing the value of the ΔT_{min} we may change the position of the pinch point. Some heat exchange might become impossible for a bigger temperature difference. When the pinch point is changing the number of streams crossing the pinch is going to change and therefore the number of heat exchangers. At the same time the total area is changing but can be distributed over more or less heat exchangers.

Variation of the ΔT_{min} value

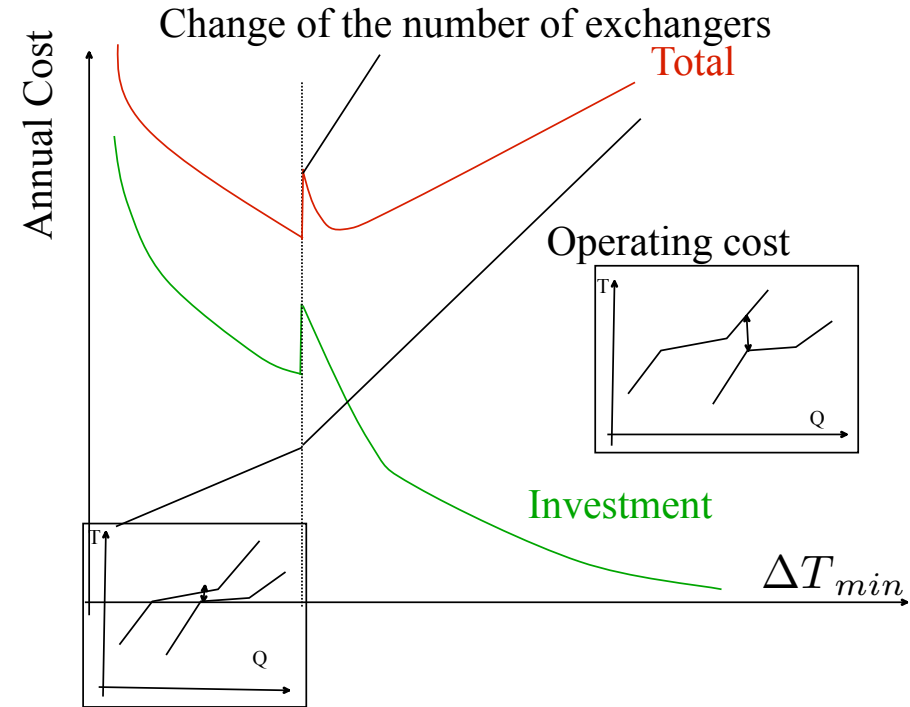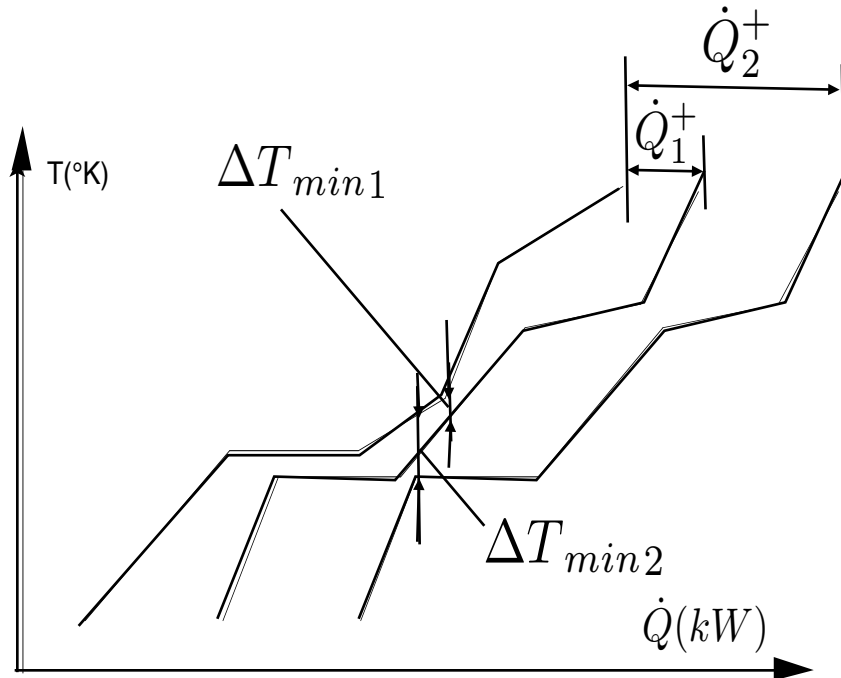

Therefore both the heat recovery and the capital cost curves will have discontinuities or jumps.

Influence of $\Delta T_{\min}$

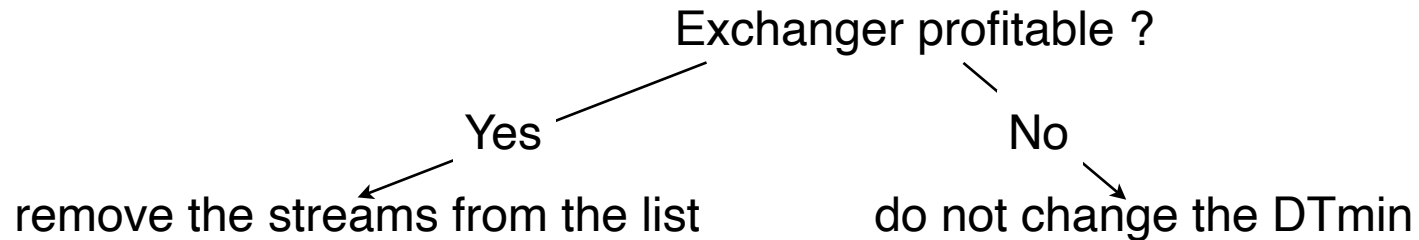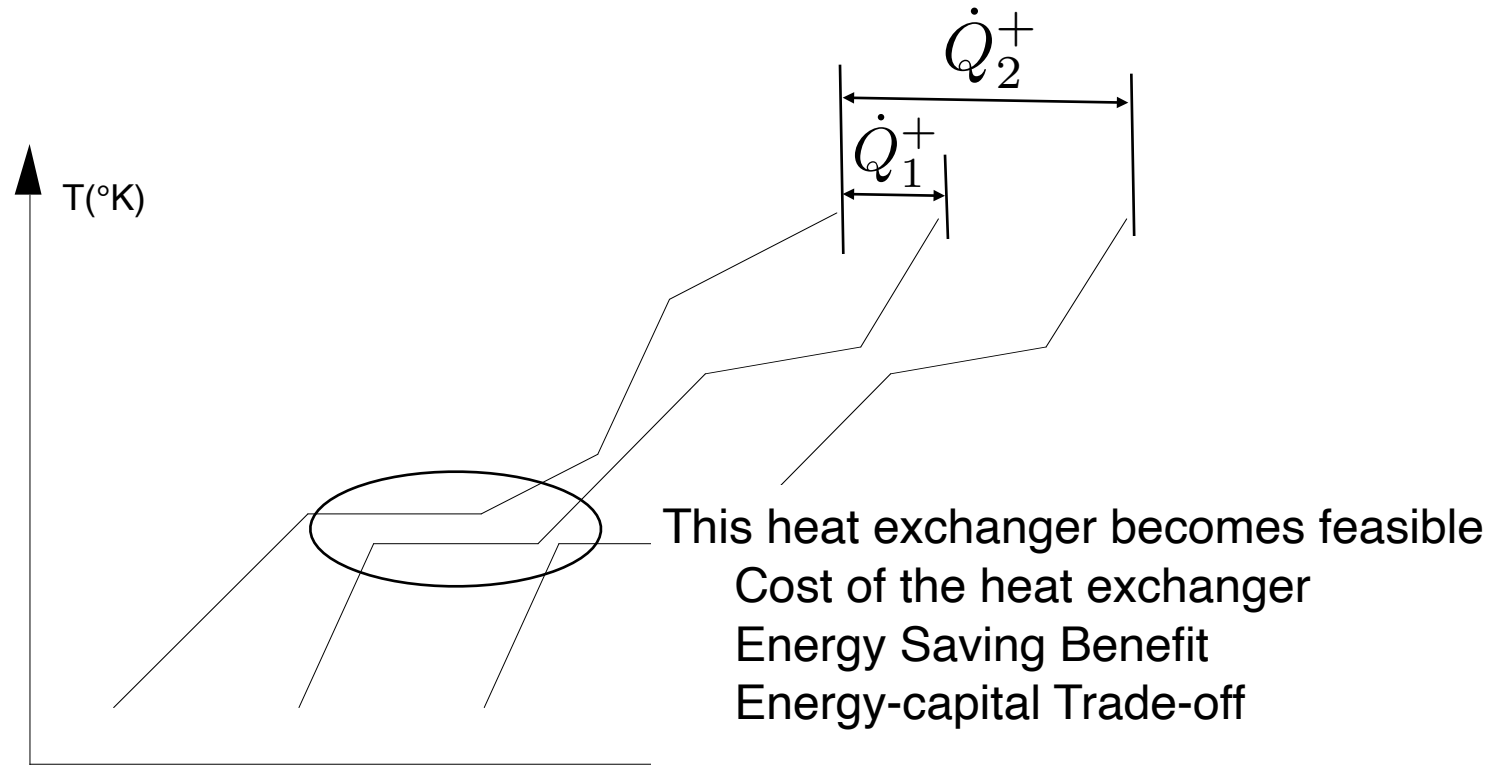

with fluid with phase change (i.e. heat exchange with constant temperature). Changing the value of the $\Delta T_{\min}$ will make the heat exchange possible or not. In this case, the heat exchange is well defined and its cost can be calculated. This area and the corresponding cost can therefore be compared with the corresponding saving to conclude on the feasibility of the heat recovery identified.

Fluid dependent ΔT_{min} value

The ΔT_{min} is related to the type of fluids

Heat exchange:

$$\dot{Q}_{ex} = U_{ex} A_{ex} \Delta T_{lm}$$

Temperature difference

$$\frac{1}{U_{ex}} = \frac{1}{\alpha_{cold}} + \frac{e}{\lambda} + \frac{1}{\alpha_{hot}}$$

If A and Q are constant

If U increases : ΔT decreases

If U decreases : ΔT increases

=> ΔT_{min} is related to the streams involved

-> to the film heat transfer coefficient

$$\Delta T \geq \Delta T_{min}/2,h + \Delta T_{min}/2,c$$

As the heat exchange area depends on the heat transfer film coefficient, it makes sense to consider different values of the ΔT_{min} when streams have different heat film transfer coefficient.

SO one can associate a contribution to the ΔT_{min} that is associated to each stream.


DTmin as a function of heat transfer

Remaining parameter $\Rightarrow$ 1 DOF

$$\Delta T_{min}/2_j = K_{\Delta T_{min}} \cdot \left(\frac{Q_j}{h_j} \right)^{\frac{c}{c+1}}$$

Convective heat transfer coefficient

c is the cost exponent in the heat exchanger cost estimation formula

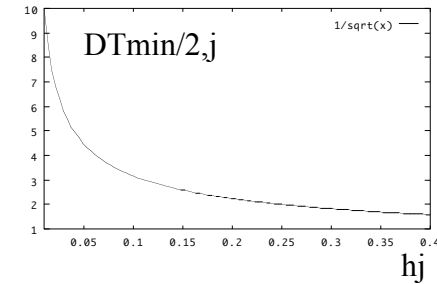

Liquid State : $2 \cdot K_{\Delta T_{min}}$

Fluid phase change : $1 \cdot K_{\Delta T_{min}}$

Gas State : $5 \cdot K_{\Delta T_{min}}$

Table 1: Typical values for the $\Delta T_{min}/2$ as a function of the heat transfer film coefficient

Type	Heat transfer coefficient $W/m^2/C$	$\Delta T_{min}/2$
Gas stream	60	15
Liquid stream	560	5
Condensing stream	1600	3
Vaporizing stream	3600	2

In reality, not only the film transfer coefficient defines the area but also the heat load (smaller heat exchangers would have higher specific cost (CHF/m²) due to the heat load. Therefore the $\Delta T_{min}/2$ contribution can be associated to the ratio heat per heat transfer coefficient. The exponent comes from the optimum value considering the trade-off between capital and savings.

Note that there is still one unknown ($K_{\Delta T_{min}}$) that will be used to calculate the overall ΔT_{min} value.

Streams dependent ΔT_{min}

$$T_h^* = T_h - \Delta T_{min}/2_h \quad \forall h \in \{hot\ streams\}$$

$$T_c^* = T_c + \Delta T_{min}/2_c \quad \forall c \in \{cold\ streams\}$$

$$\min_{R_r} \dot{Q}^+ = R_{n_r+1}$$

subject to heat balance of the temperature intervals :


$$\begin{aligned} R_r = & R_{r+1} \\ & + \sum_{h_r \in \{\text{hot streams in interval } r\}} \dot{M}_{h_r} c_{p_{h_r}} (T_{r+1}^* - T_r^*) \\ & - \sum_{c_r \in \{\text{cold streams in interval } r\}} \dot{M}_{c_r} c_{p_{c_r}} (T_{r+1}^* - T_r^*) \end{aligned} \quad \forall r = 1, \dots, n_r$$

and the heat cascade feasibility

$$R_r \geq 0 \quad \forall r = 1, \dots, n_r + 1$$

With the new definition of the corrected temperatures, the calculation of the heat cascade and the pinch point location remains identical.

DTmin sensitivity

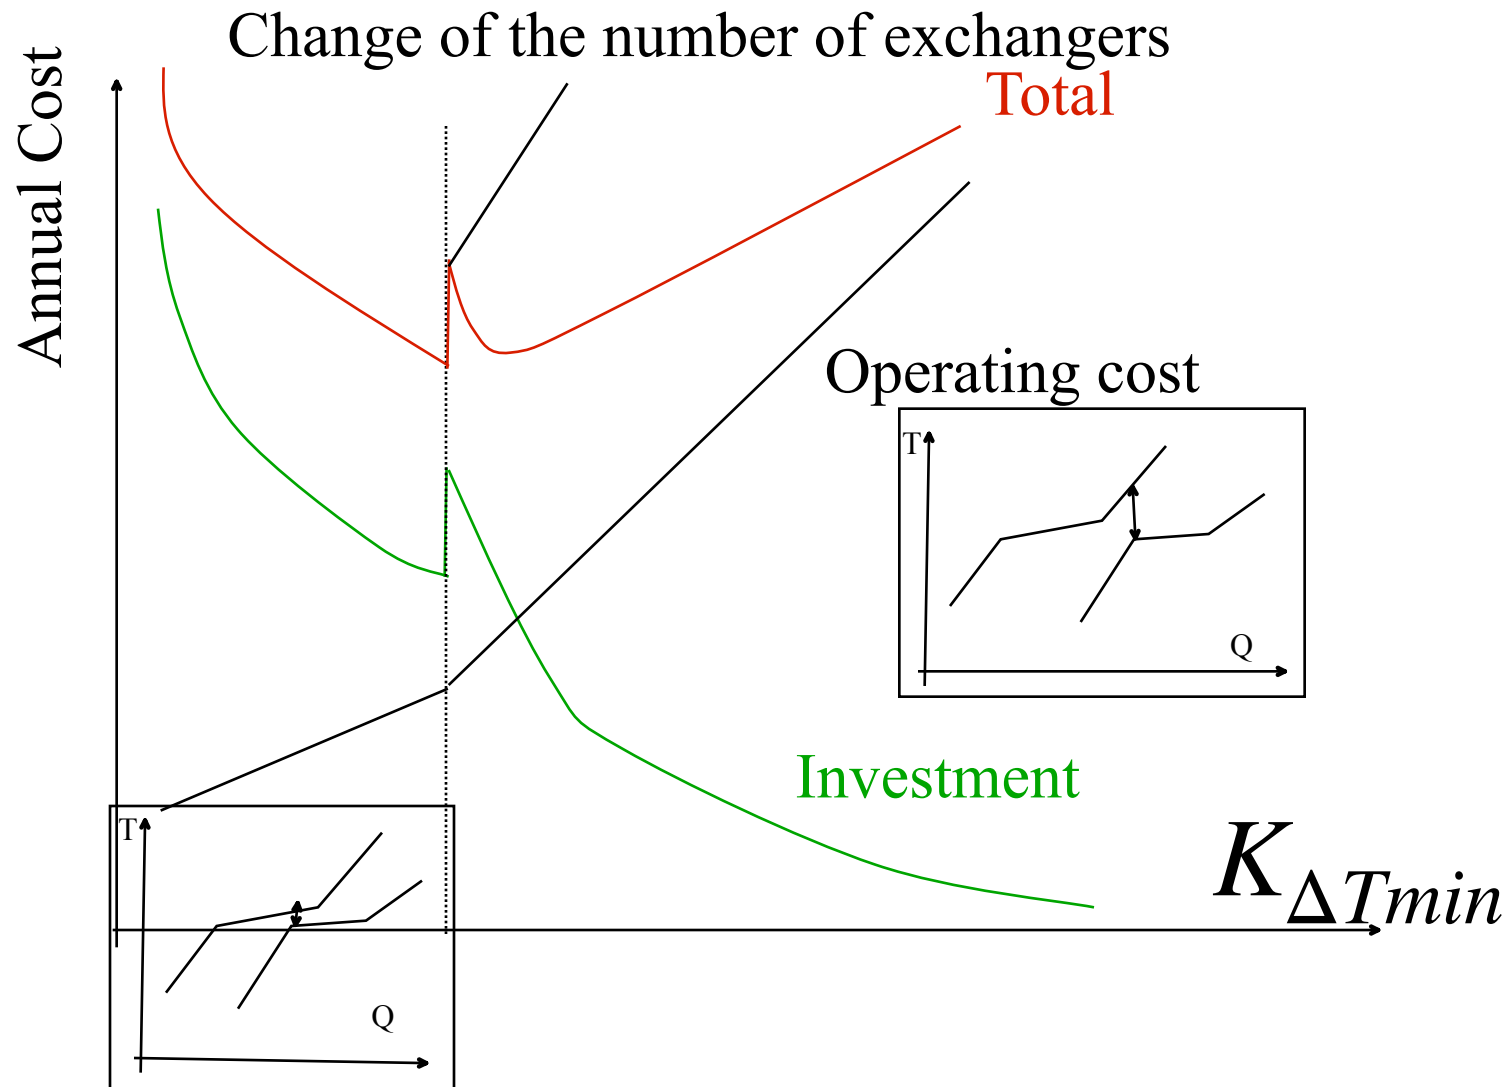

ΔT_{min} value analysis

$$\forall K_{\Delta T_{min}} \in \{K_{\Delta T_{min}}^{min} \dots K_{\Delta T_{min}}^{max} \text{ by } \delta\}$$

Cost estimation of the system

Operation : Energy cost by heat cascade

Investments :

- minimum number of units
- estimated area
- equal repartition

Total cost = Operating + $1/\tau^*$ investments

-> Pinch point changes

Streams concerned

New connections

-> Optimal value

has to be between the two pinch points that frame
the optimal value

By changing the value of the $K_{\Delta T_{min}}$ it is possible to calculate what is the best value of the $\Delta T_{min}/2_j$

Conclusions

- Estimating the cost of heat exchange system
 - Vertical heat exchanges => overall area
 - Adapted for different heat transfer coefficient
 - Graph theory => minimum number of units
 - Pinch point divides system in sub-systems
 - Equi-repartition of area
 - overestimation of the investment cost
- DTmin optimisation
 - Stream dependent $DT_{min}/2$
 - Best pinch point location
- Starting point for
 - Heat exchanger network design
 - Heat exchanger network debugging

-
- pinch design method