




# Most flows are unstable...

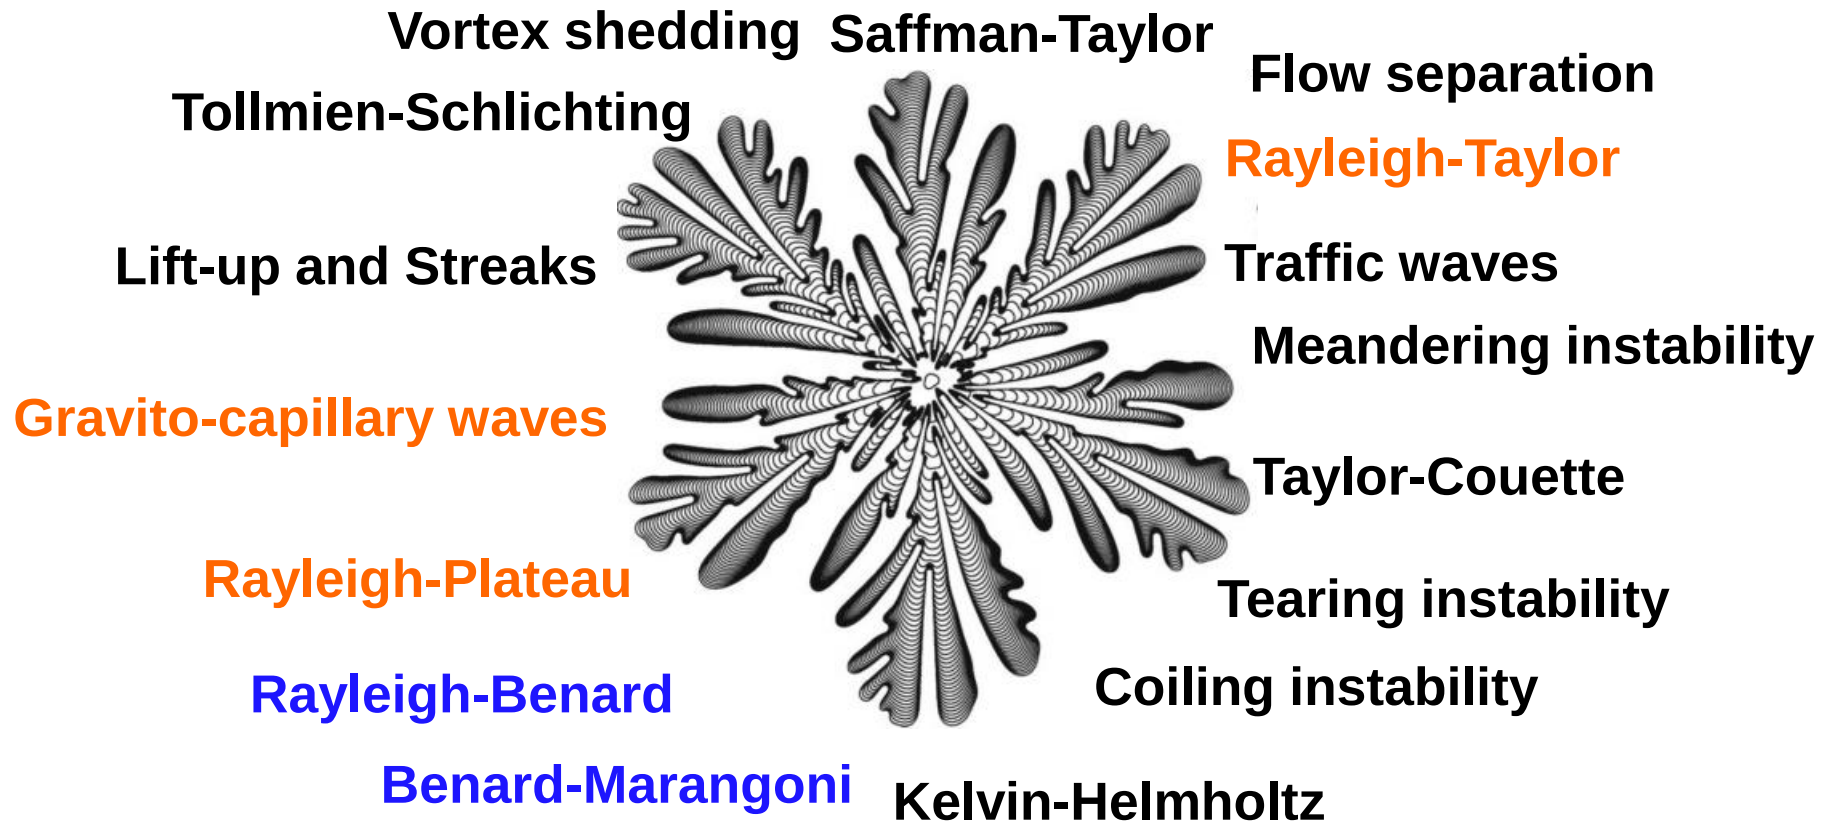

# Instability analysis:

1. Physical mechanism
2. Equations and boundary conditions
3. Base state
4. Linearized equations
5. Normal mode expansion
6. Dispersion relation
7. Analysis of the dispersion relation

# Rayleigh Benard

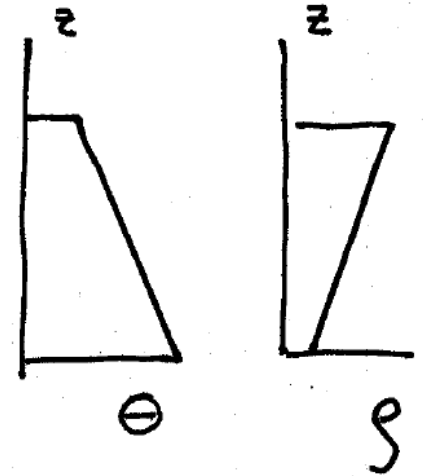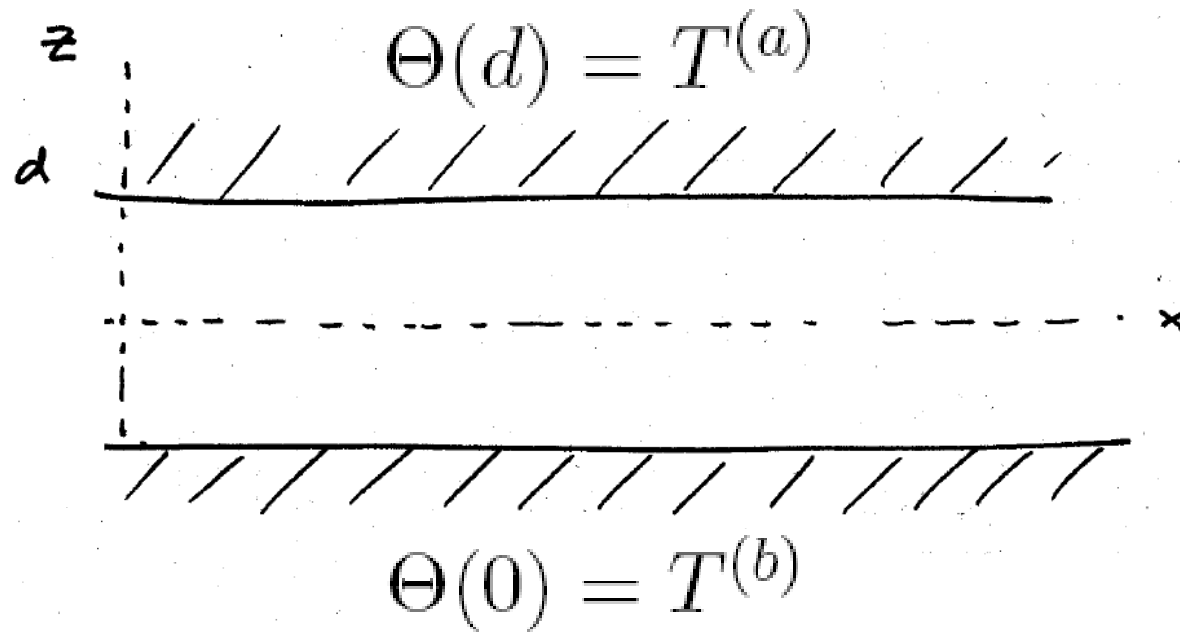

# Rayleigh Benard



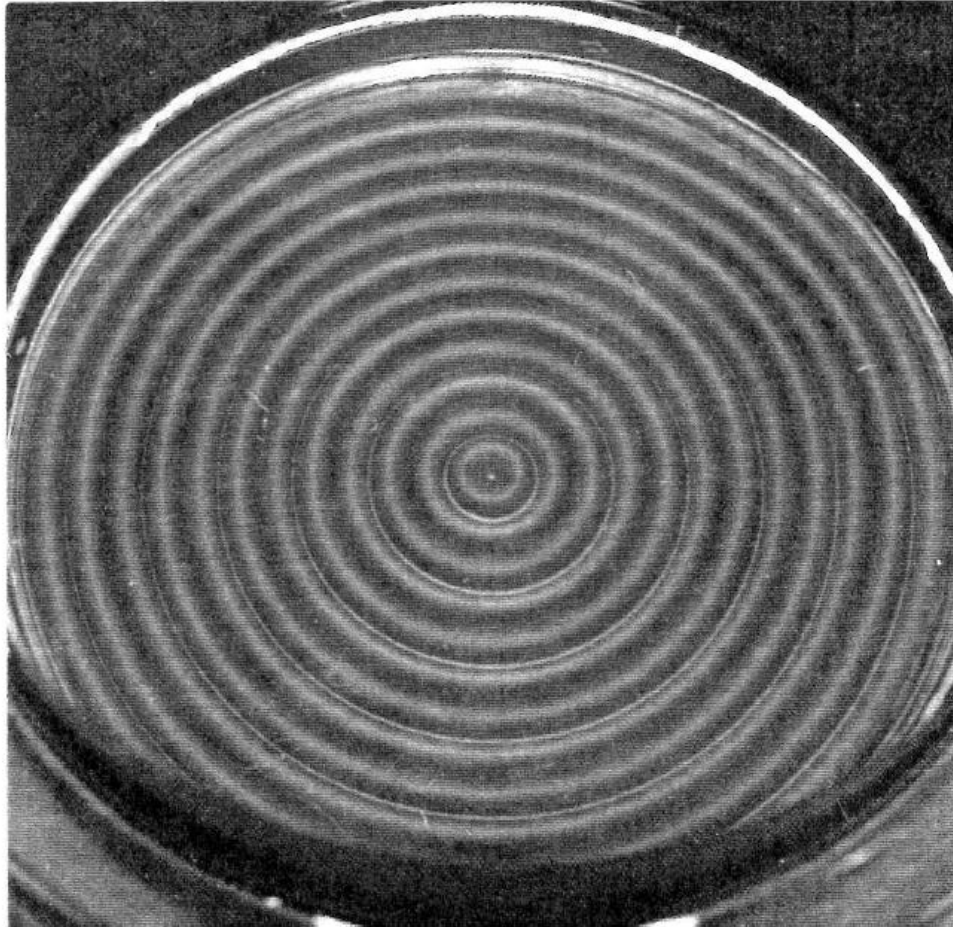


FIG. 2.13 – Vue de dessus de rouleaux de convection thermique dans une huile silicone, visualisés par de la poudre d'aluminium à travers une paroi supérieure en Plexiglas. La frontière circulaire induit des rouleaux circulaires.  $Ra = 2,9 Ra_c$ . Cliché Koschmieder (1974) d'après (Van Dyke 1982).


# Rayleigh Benard

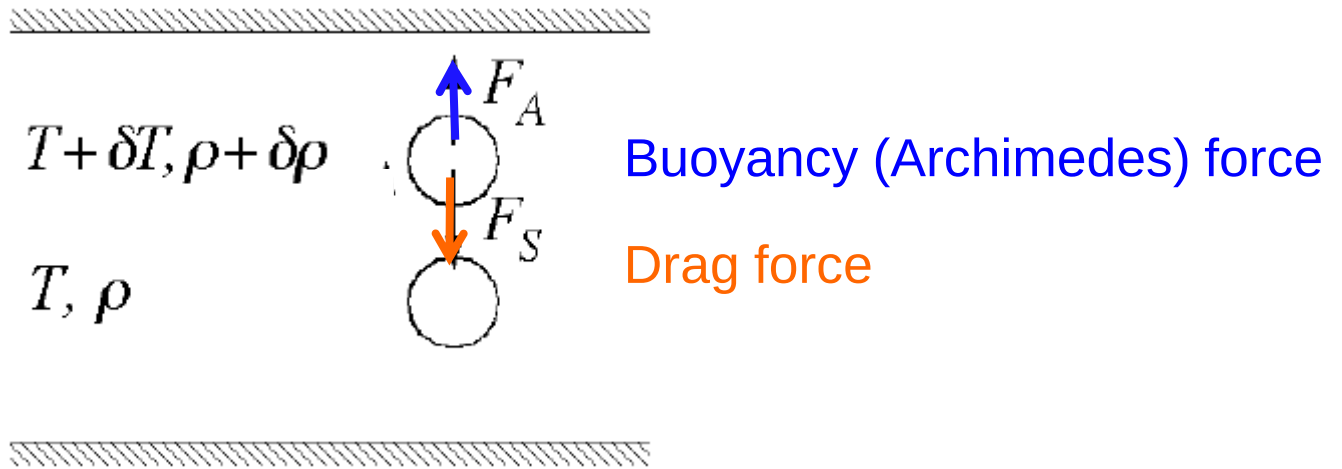


# Rayleigh Benard

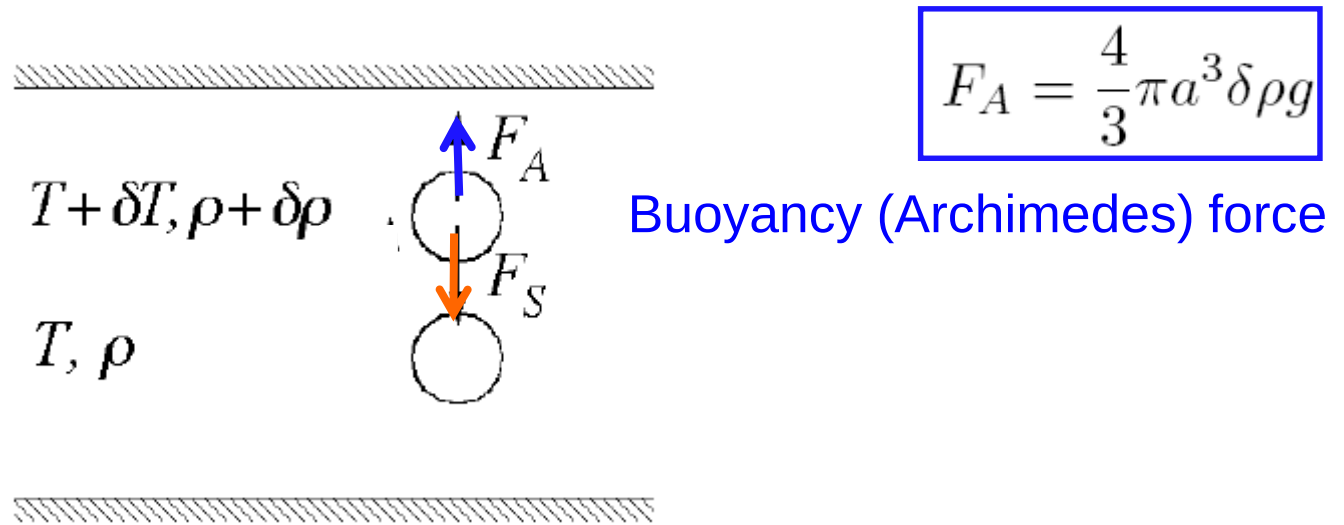


# Rayleigh Benard

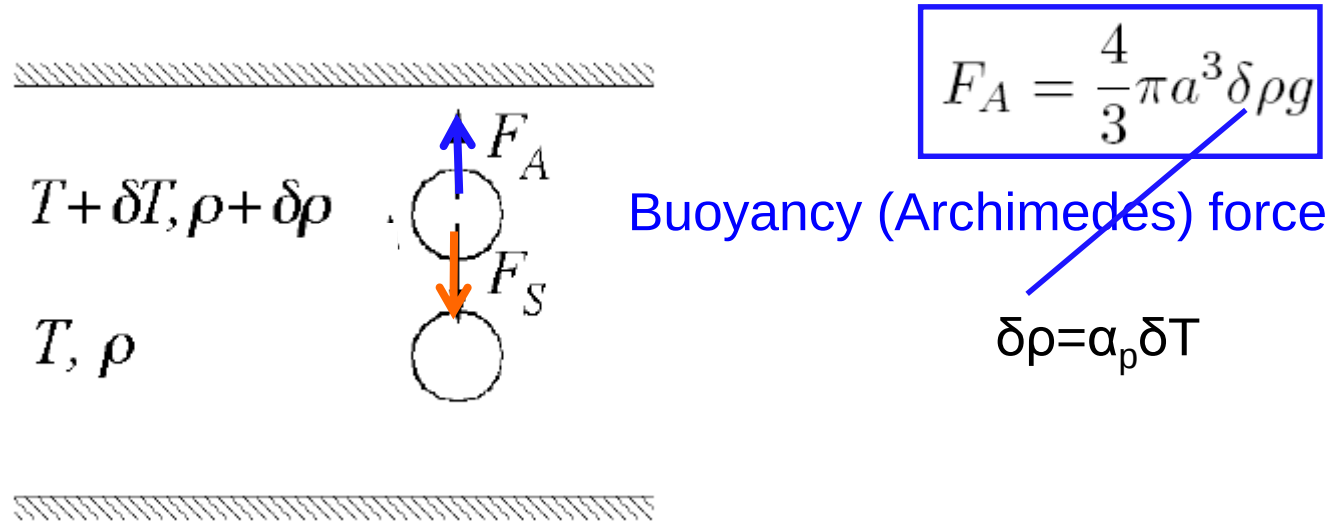

# Rayleigh Benard

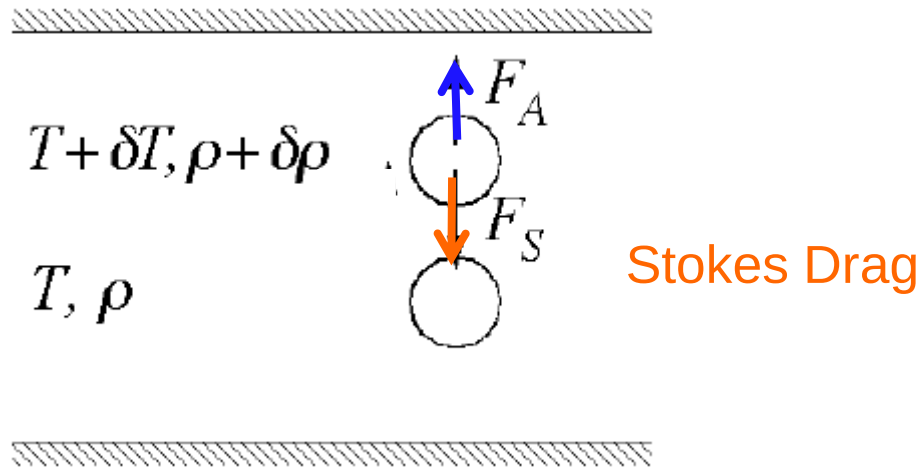

# Rayleigh Benard

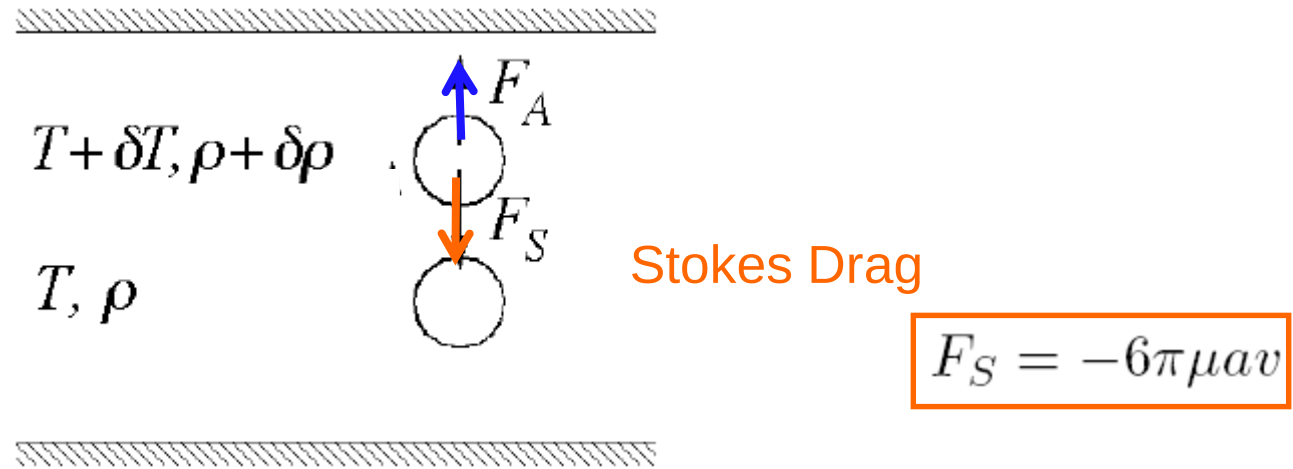

# Rayleigh Benard


$$\delta\rho = \alpha_p \delta T$$

$$F_A = \frac{4}{3}\pi a^3 \delta\rho g$$

Buoyancy (Archimedes) force

Stokes Drag


$$F_S = -6\pi\mu a v$$

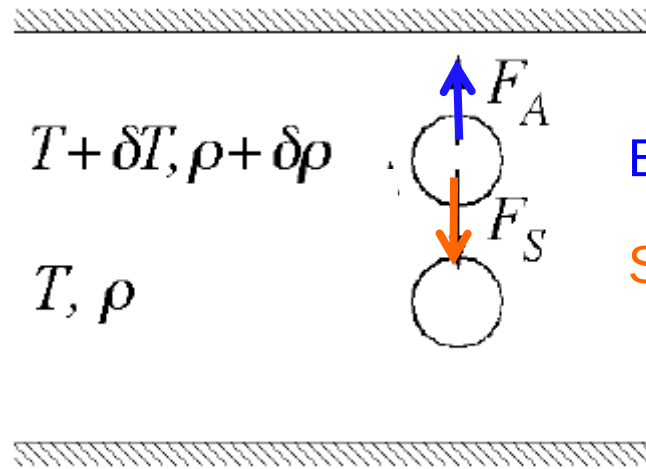

$$v = \frac{2}{9} \frac{\alpha_p g a^2 \delta T}{\mu}$$

# Rayleigh Benard

$$v = \frac{2}{9} \frac{\alpha_p g a^2 \delta T}{\nu}$$

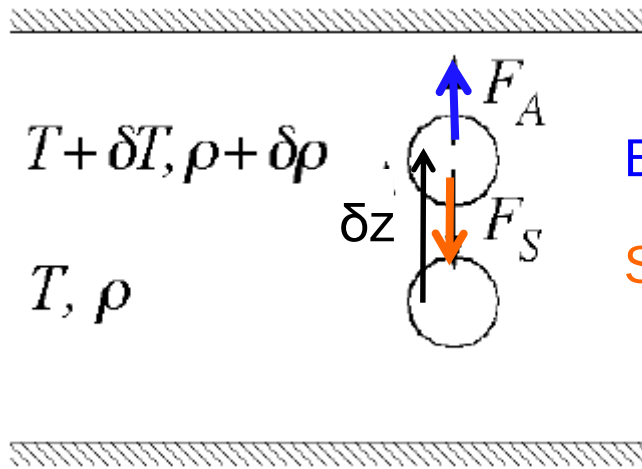

$$F_A = \frac{4}{3} \pi a^3 \delta \rho g$$

Buoyancy (Archimedes) force

Stokes Drag

$$F_S = -6\pi\mu a v$$

Diffusive time scale  
(damps the instability)

$$a^2 / \kappa$$

$$\delta z / v$$

Advective time  
(regenerates the instability)

$$\delta T / \delta z = (T_a - T_b) / d$$

$$\frac{a^2}{\kappa} \sim \frac{\delta T d}{(T_1 - T_2) v}$$

# Rayleigh Benard

Diffusive time scale  
(damps the instability)


$$\frac{a^2}{\kappa} \sim \frac{\delta T d}{(T_1 - T_2)v}$$

Advective time  
(regenerates the instability)

$$v = \frac{2}{9} \frac{\alpha_p g a^2 \delta T}{\nu}$$

$$a \sim d/2$$

$$Ra := \frac{\alpha_p g (T_1 - T_2) d^3}{\nu \kappa} = \frac{\text{Diffusive time scale}}{\text{Advective time scale}}$$

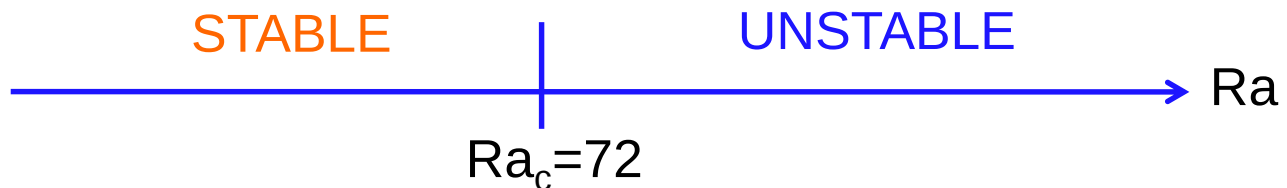

# Rayleigh Benard

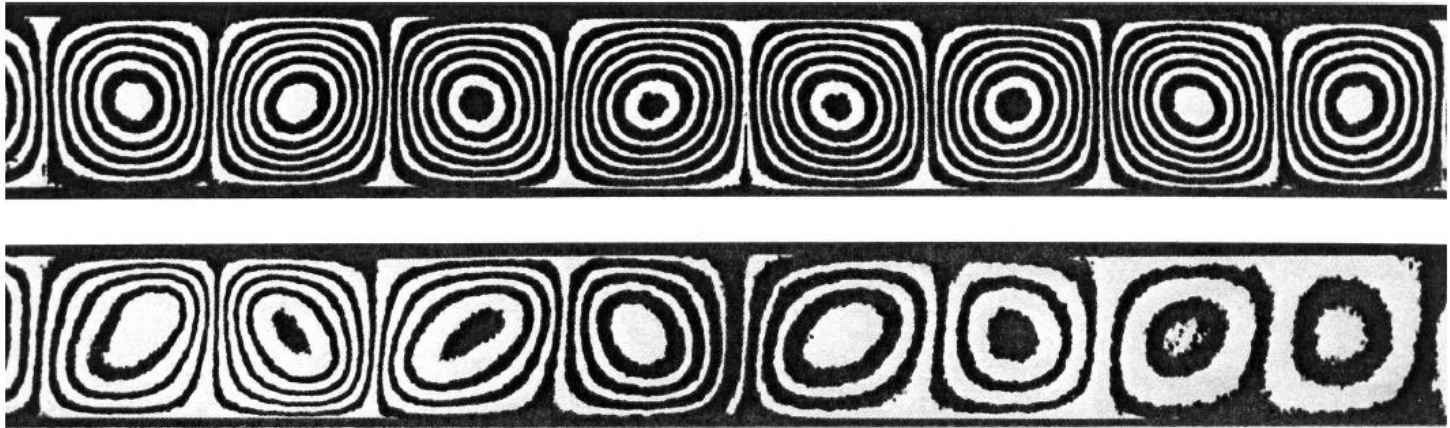


FIG. 2.12 – *Rouleaux de convection thermique dans une huile silicone. Les lignes de courant sont visualisés par interférogrammes. Les dimensions relatives de la boîte sont 10 : 4 : 1. Haut : rouleaux réguliers orientés parallèlement au petit côté, pour un gradient de température uniforme. Bas : La différence de température et donc l'intensité des rouleaux décroît de la gauche vers la droite. Cliché Oertel & Kirchartz, 1979 (Van Dyke 1982).*

# Navier Stokes equations

## Oberbeck boussinesq equations

$$\begin{aligned}\nabla \cdot \vec{u} &= 0 \\ \rho^* \left[ \frac{\partial \vec{u}}{\partial t} + (\nabla \vec{u}) \vec{u} \right] &= -\rho(T) g \vec{e}_z - \nabla p + \mu^* \nabla^2 \vec{u} \\ C_v^* \left( \frac{\partial T}{\partial t} + \nabla T \cdot \vec{u} \right) &= \chi^* \nabla^2 T + \cancel{2\mu/\rho^*} \mathbf{D}:\mathbf{D}\end{aligned}$$

$$\rho(T) = \rho^* [1 - \alpha^* (T - T^*)]$$

H1: the density is constant except in the buoyancy term

H2: the heat release by viscous dissipation is neglected

H3: viscosity and thermal conductivity are assumed constant

# Base flow solution

## Pure conduction solution

$$\rho^* \left[ 1 - \alpha^* \left( \Theta - T^{(b)} \right) \right] g + dP/dz = 0$$
$$d^2 \Theta / dz^2 = 0$$

$$\Theta(z) = T^{(b)} - \frac{T^{(b)} - T^{(a)}}{d} z$$

# Perturbation expansion

$$\vec{u}(x, y, z; t) = \vec{U} + \vec{u}'(x, y, z; t) = \vec{u}'(x, y, z; t)$$

$$p(x, y, z; t) = P(z) + p'(x, y, z; t)$$

$$T(x, y, z; t) = \Theta(z) + \theta'(x, y, z; t)$$

$$\nabla \cdot \vec{u}' = 0 \qquad \nu^* = \mu^* / \rho^*$$

$$\frac{\partial \vec{u}'}{\partial t} + (\nabla \vec{u}') \vec{u}' = \alpha^* \theta' g \vec{e}_z - \nabla p' / \rho^* + \nu^* \nabla^2 \vec{u}'$$

$$\frac{\partial \theta'}{\partial t} + \nabla \Theta \cdot \vec{u}' + \nabla \theta' \cdot \vec{u}' = \kappa^* \nabla^2 \theta'$$

$$\kappa^* = \chi^* / C_v^*$$

## Perturbation expansion

$$\nabla \cdot \vec{u}' = 0$$

$$\frac{\partial \vec{u}'}{\partial t} + (\nabla \vec{u}') \cdot \vec{u}' = \alpha^* \theta' g \vec{e}_z - \frac{\nabla p'}{\rho^*} + \nu^* \nabla^2 \vec{u}'$$

$$\frac{\partial \theta'}{\partial t} - \frac{T^{(b)} - T^{(a)}}{d} \vec{e}_z \cdot \vec{u}' + \nabla \theta' \cdot \vec{u}' = \kappa^* \nabla^2 \theta'$$

# Perturbation expansion

$$\nabla \cdot \vec{u}' = 0 \quad \boxed{\text{Pr} = \frac{\nu^*}{\kappa^*}}$$

$$\frac{\partial \vec{u}'}{\partial t} + (\nabla \vec{u}') \cdot \vec{u}' = \cancel{\rho^*} \theta' \cancel{g} \vec{e}_z - \frac{\nabla p'}{\cancel{\rho^*}} + \cancel{\nu^*} \nabla^2 \vec{u}'$$

$$\frac{\partial \theta'}{\partial t} - \cancel{\frac{T^{(b)} - T^{(a)}}{d}} \vec{e}_z \cdot \vec{u}' + \nabla \theta' \cdot \vec{u}' = \cancel{\kappa^*} \nabla^2 \theta'$$

$$\boxed{\text{Ra} = \frac{\alpha^* g \Delta T d^3}{\nu^* \kappa^*}}$$

## Non dimensionalisation

$$L_{ref} = d$$

$$t_{ref} = d^2 / \kappa^*$$

$$U_{ref} = L_{ref} / t_{ref} = \kappa^* / d$$

$$P_{ref} = \rho^* U_{ref}^2 = \rho^* \kappa_*^2 / d^2$$

$$T_{ref} = \kappa^* \nu^* / \alpha^* g d^3$$

## Perturbation expansion

$$\nabla \cdot \vec{u}' = 0$$

$$\frac{\partial \vec{u}'}{\partial t} + (\nabla \vec{u}') \cdot \vec{u}' = \alpha^* \theta' g \vec{e}_z - \frac{\nabla p'}{\rho^*} + \nu^* \nabla^2 \vec{u}'$$

$$\frac{\partial \theta'}{\partial t} - \frac{T^{(b)} - T^{(a)}}{d} \vec{e}_z \cdot \vec{u}' + \nabla \theta' \cdot \vec{u}' = \kappa^* \nabla^2 \theta'$$

## Non dimensionalisation

$$\nabla \cdot \vec{u}' = 0$$

$$\frac{\partial \vec{u}'}{\partial t} + (\nabla \vec{u}') \cdot \vec{u}' = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$

$$\frac{\partial \theta'}{\partial t} - \text{Ra} \vec{e}_z \cdot \vec{u}' + \nabla \theta' \cdot \vec{u}' = \nabla^2 \theta'$$

# Linearisation

$$\nabla \cdot \vec{u}' = 0$$

$$\frac{\partial \vec{u}'}{\partial t} + (\nabla \vec{u}') \cdot \vec{u}' = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$


$$\frac{\partial \theta'}{\partial t} - \text{Ra} \vec{e}_z \cdot \vec{u}' + \nabla \theta' \cdot \vec{u}' = \nabla^2 \theta'$$

# Linearisation

$$\nabla \cdot \vec{u}' = 0$$

$$\frac{\partial \vec{u}'}{\partial t} + (\nabla \vec{u}') \cdot \vec{u}' = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$

$$\frac{\partial \theta'}{\partial t} - \text{Ra} \vec{e}_z \cdot \vec{u}' + \nabla \theta' \cdot \vec{u}' = \nabla^2 \theta'$$



$$\nabla \cdot \vec{u}' = 0$$

$$\frac{\partial \vec{u}'}{\partial t} = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$

$$\frac{\partial \theta'}{\partial t} = \text{Ra} \vec{e}_z \cdot \vec{u}' + \nabla^2 \theta'$$

# Change of variables

$$\frac{\partial \vec{u}'}{\partial t} = \text{Pr } \theta' \vec{e}_z - \nabla p' + \text{Pr } \nabla^2 \vec{u}'$$

# Change of variables

$$\frac{\partial \vec{u}'}{\partial t} = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$

$$\nabla \times \downarrow$$

$$\partial(\nabla \times \vec{u}')/\partial t = \text{Pr} \nabla \times (\theta' \vec{e}_z) + \text{Pr} \nabla^2 (\nabla \times \vec{u}')$$

# Change of variables

$$\frac{\partial \vec{u}'}{\partial t} = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$

$$\nabla \times \Downarrow$$

$$\partial(\nabla \times \vec{u}')/\partial t = \text{Pr} \nabla \times (\theta' \vec{e}_z) + \text{Pr} \nabla^2 (\nabla \times \vec{u}')$$

$$\nabla \times \Downarrow$$

$$\nabla \times \nabla \times \vec{a} = \nabla(\nabla \cdot \vec{a}) - \nabla^2 \vec{a}$$

$$\nabla \times \nabla \times \vec{u}' = \nabla(\nabla \cdot \vec{u}') - \nabla^2 \vec{u}'$$

$$\nabla \times \nabla \times \theta' \vec{e}_z = \nabla(\partial \theta' / \partial z) - \nabla^2 \theta' \vec{e}_z$$

# Change of variables

$$\frac{\partial \vec{u}'}{\partial t} = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$

$$\nabla \times \Downarrow$$

$$\partial(\nabla \times \vec{u}')/\partial t = \text{Pr} \nabla \times (\theta' \vec{e}_z) + \text{Pr} \nabla^2(\nabla \times \vec{u}')$$

$$\nabla \times \Downarrow$$

$$\nabla^2 \partial \vec{u}' / \partial t = \text{Pr} \left( \nabla^2 \theta' \vec{e}_z - \nabla(\partial \theta' / \partial z) \right) + \text{Pr} \nabla^4 \vec{u}'$$

$$\nabla \times \nabla \times \vec{a} = \nabla(\nabla \cdot \vec{a}) - \nabla^2 \vec{a}$$

$$\nabla \times \nabla \times \vec{u}' = \nabla(\nabla \cdot \vec{u}') - \nabla^2 \vec{u}'$$

$$\nabla \times \nabla \times \theta' \vec{e}_z = \nabla(\partial \theta' / \partial z) - \nabla^2 \theta' \vec{e}_z$$

# Change of variables

$$\frac{\partial \vec{u}'}{\partial t} = \text{Pr} \theta' \vec{e}_z - \nabla p' + \text{Pr} \nabla^2 \vec{u}'$$

$$\nabla \times \Downarrow$$

$$\partial(\nabla \times \vec{u}')/\partial t = \text{Pr} \nabla \times (\theta' \vec{e}_z) + \text{Pr} \nabla^2 (\nabla \times \vec{u}')$$

$$\nabla \times \Downarrow$$

$$\nabla^2 \partial \vec{u}' / \partial t = \text{Pr} \left( \nabla^2 \theta' \vec{e}_z - \nabla (\partial \theta' / \partial z) \right) + \text{Pr} \nabla^4 \vec{u}'$$

$$\boxed{\nabla^2 \frac{\partial u'_z}{\partial t} = \text{Pr} \nabla^4 u'_z + \text{Pr} \nabla_h^2 \theta'} \quad \nabla_h^2 = \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2}$$

## Reduction to two equations

$$\begin{aligned}\nabla^2 \frac{\partial u'_z}{\partial t} &= \text{Pr} \nabla^4 u'_z + \text{Pr} \nabla_h^2 \theta' \\ \frac{\partial \theta'}{\partial t} &= \text{Ra} u'_z + \nabla^2 \theta',\end{aligned}$$

$$M \frac{\partial \phi}{\partial t} = L \phi$$

$$\phi = \begin{Bmatrix} u'_z \\ \theta' \end{Bmatrix}; \quad M = \begin{bmatrix} \nabla^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad L = \begin{bmatrix} \text{Pr} \nabla^4 & \text{Pr} \nabla_h^2 \\ \text{Ra} & \nabla^2 \end{bmatrix}$$

## Normal mode expansion

$$\phi = \hat{\phi}(z) e^{st+i(k_x x + k_y y)} \quad s = -i\omega$$

# Normal mode expansion

$$M \frac{\partial \phi}{\partial t} = L \phi$$

$$\phi = \begin{Bmatrix} u'_z \\ \theta' \end{Bmatrix}; \quad M = \begin{bmatrix} \nabla^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad L = \begin{bmatrix} \text{Pr} \nabla^4 & \text{Pr} \nabla_h^2 \\ \text{Ra} & \nabla^2 \end{bmatrix}$$

$$\phi = \hat{\phi}(z) e^{st+i(k_x x + k_y y)} \quad s = -i\omega \quad \vec{k} = \{k_x, k_y\} \\ k = |\vec{k}|$$

$$s \hat{M} \hat{\phi} = \hat{L} \hat{\phi}$$

$$\hat{M} = \begin{bmatrix} D^2 - k^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad \hat{L} = \begin{bmatrix} \text{Pr} (D^2 - k^2)^2 & -\text{Pr} k^2 \\ \text{Ra} & D^2 - k^2 \end{bmatrix}$$

# Normal mode expansion

$$M \frac{\partial \phi}{\partial t} = L \phi$$

$$\phi = \begin{Bmatrix} u'_z \\ \theta' \end{Bmatrix}; \quad M = \begin{bmatrix} \nabla^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad L = \begin{bmatrix} \text{Pr} \nabla^4 & \text{Pr} \nabla_h^2 \\ \text{Ra} & \nabla^2 \end{bmatrix}$$


$$\phi = \hat{\phi}(z) e^{st + i(k_x x + k_y y)} \quad s = -i\omega \quad \vec{k} = \{k_x, k_y\} \\ k = |\vec{k}|$$

# Thermal boundary conditions

$$\hat{\theta}(z = 1) = 0$$

$$\theta'(x, y, z = 1; t) = 0$$

$$T(x, y, z = 1; t) = \Theta(z = 1) = T^{(a)}$$

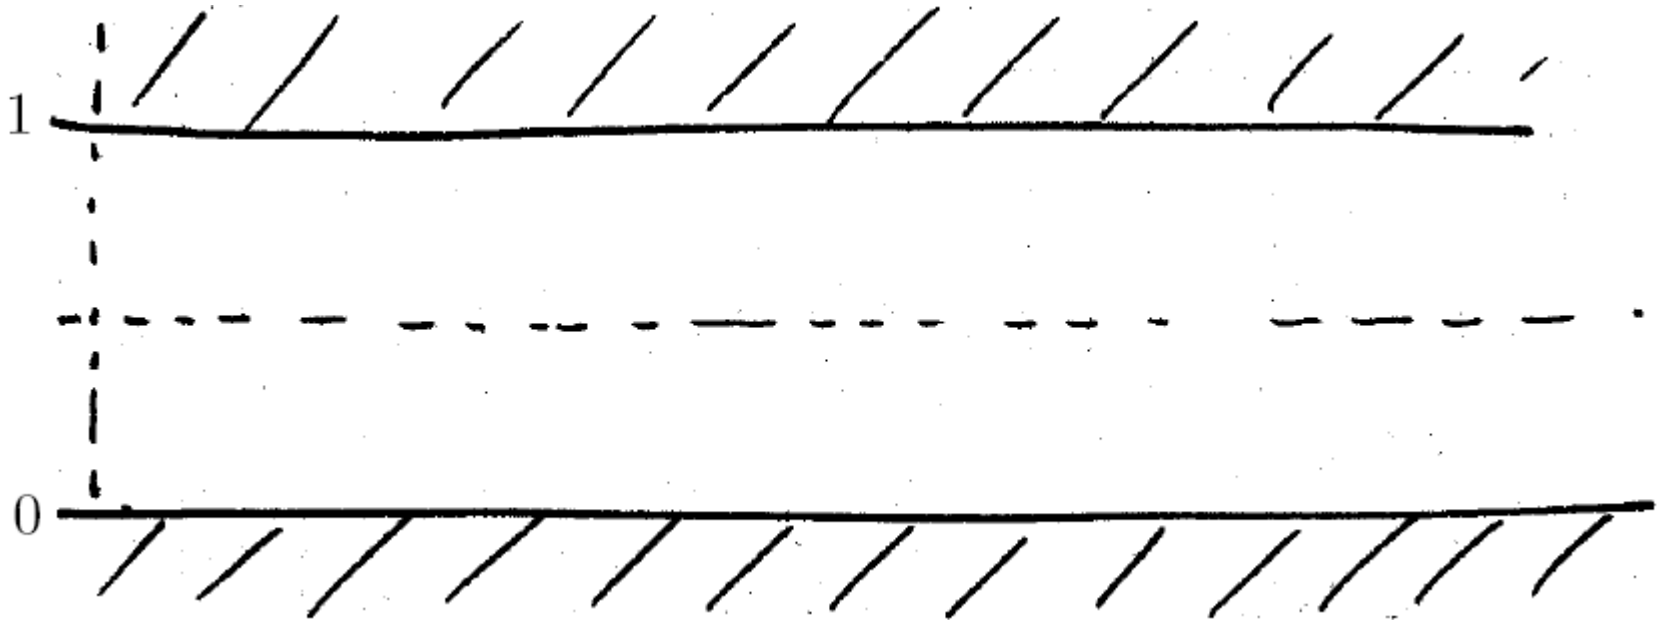

$$T(x, y, z = 0; t) = \Theta(z = 0) = T^{(b)}$$


$$\theta'(x, y, z = 0; t) = 0$$

$$\hat{\theta}(z = 0) = 0$$

# Rigid boundary conditions

$$\hat{u}_z(z=1) = 0, \quad (D\hat{u}_z)(z=1) = 0$$

$$u'_z(x, y, z=1; t) = 0, \quad (\partial u'_z / \partial z)(x, y, z=1; t) = 0$$

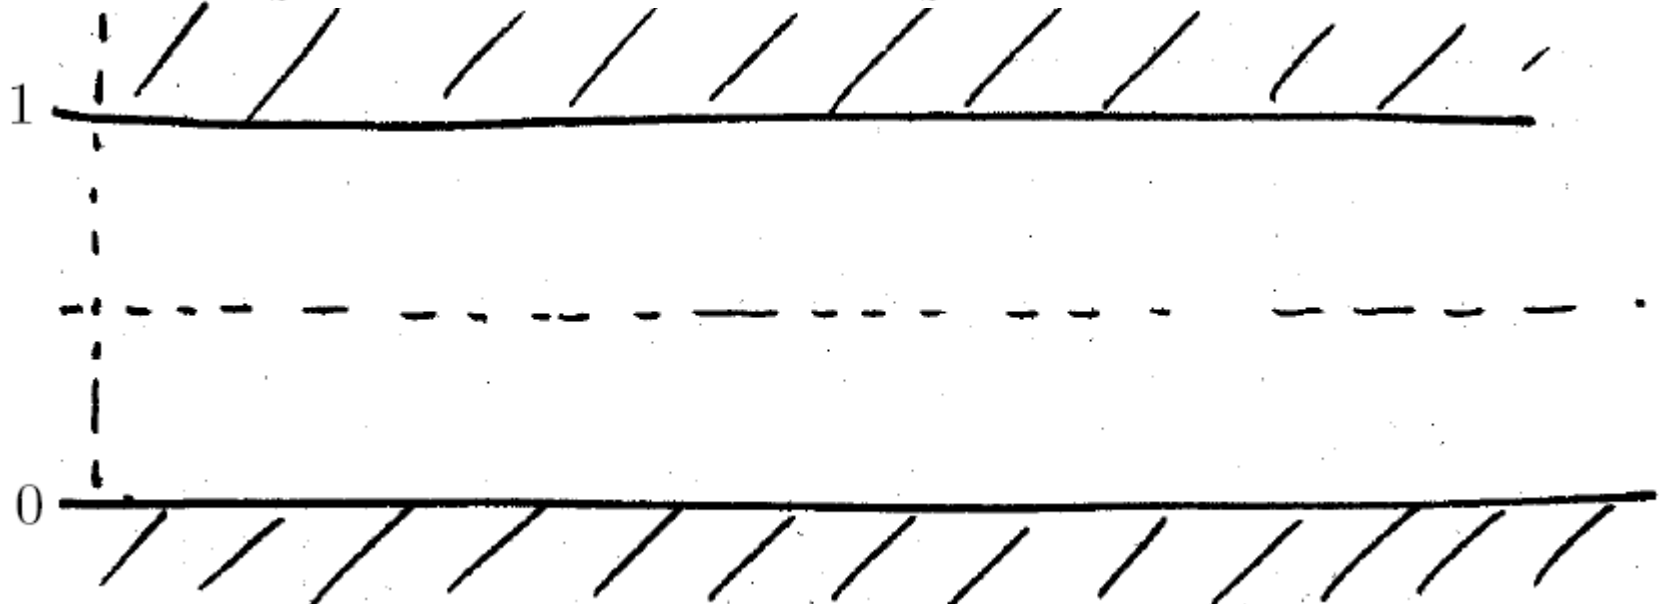

$$u'_z(x, y, z=0; t) = 0, \quad (\partial u'_z / \partial z)(x, y, z=0; t) = 0$$

$$\hat{u}_z(z=0) = 0, \quad (D\hat{u}_z)(z=0) = 0$$

# Stress free boundary conditions

$$\sigma_{xz} = 0$$

$$\mu(\partial u_x / \partial z + \partial u_z / \partial x) = 0$$

$$\partial u_x / \partial z = 0$$

# Stress free boundary conditions

$$\sigma_{xz} = 0$$

$$\mu(\partial u_x / \partial z + \partial u_z / \partial x) = 0$$

$$\partial u_x / \partial z = 0$$

$$\sigma_{yz} = 0$$

$$\partial u_y / \partial z = 0$$

# Stress free boundary conditions

$$\sigma_{xz} = 0$$

$$\sigma_{yz} = 0$$

$$\mu(\partial u_x / \partial z + \partial u_z / \partial x) = 0$$

$$\partial u_x / \partial z = 0$$

$$\partial u_y / \partial z = 0$$


$$\partial / \partial z \quad \partial u_x / \partial x + \partial u_y / \partial y + \partial u_z / \partial z = 0$$

$$\partial^2 u_z / \partial z^2 = 0$$

# Free stress boundary conditions

$$\hat{u}_z(z=1) = 0, \quad (D^2 \hat{u}_z)(z=1) = 0$$

$$u'_z(x, y, z=1; t) = 0, \quad (\partial^2 u'_z / \partial z^2)(x, y, z=1; t) = 0$$

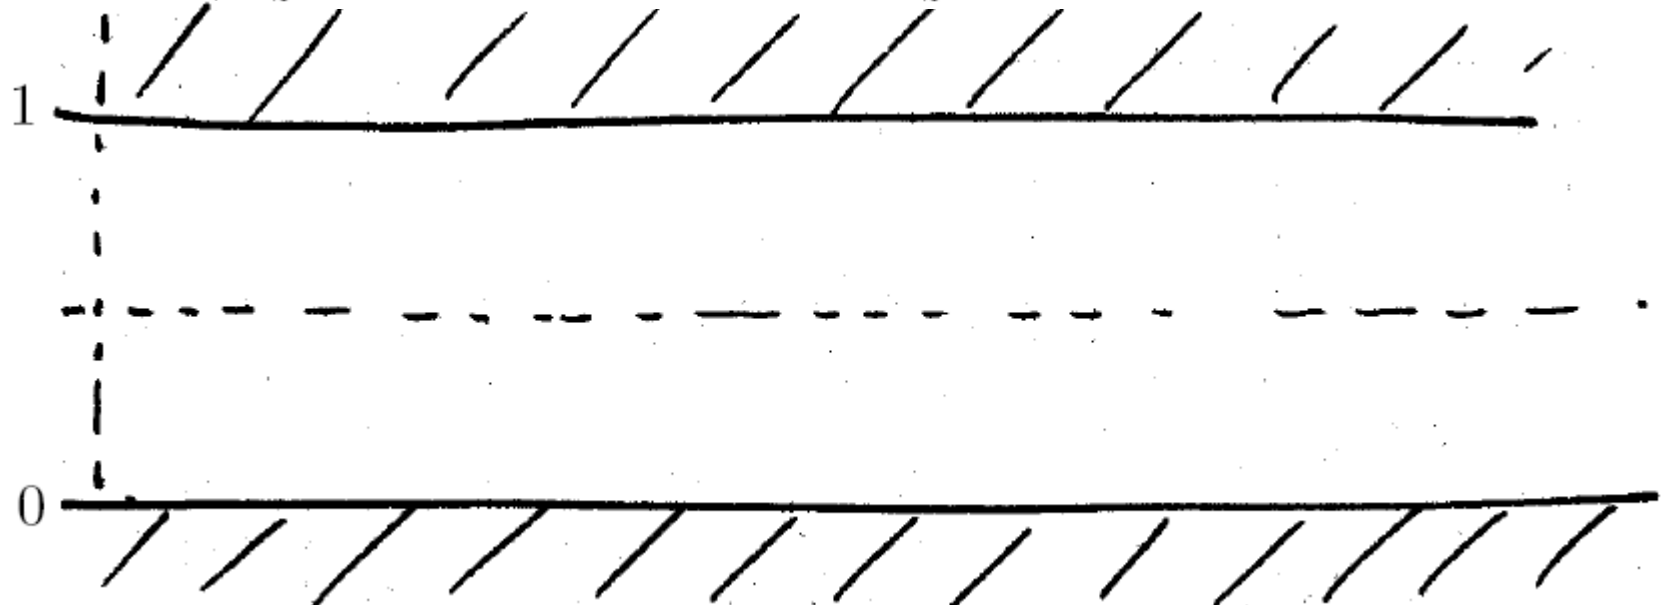

$$u'_z(x, y, z=0; t) = 0, \quad (\partial^2 u'_z / \partial z^2)(x, y, z=0; t) = 0$$

$$\hat{u}_z(z=0) = 0, \quad (D^2 \hat{u}_z)(z=0) = 0$$

## Solution ansatz (which satisfies the b.c.)

$$\widehat{\phi} = \widetilde{\phi}_n \sin(n\pi z)$$

$$s\widetilde{M}\widetilde{\phi} = \widetilde{L}\widetilde{\phi}$$

$$\widetilde{M} = \begin{bmatrix} -k_n^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad \widetilde{L} = \begin{bmatrix} \text{Pr } k_n^4 & -\text{Pr } k^2 \\ \text{Ra} & -k_n^2 \end{bmatrix}$$

$$k_n^2 := k^2 + (n\pi)^2$$

## Solution ansatz (which satisfies the b.c.)

$$\hat{\phi} = \widetilde{\phi}_n \sin(n\pi z)$$

$$s\widetilde{\mathbf{M}}\widetilde{\phi} = \widetilde{\mathbf{L}}\widetilde{\phi}$$

$$\widetilde{\mathbf{M}} = \begin{bmatrix} -k_n^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad \widetilde{\mathbf{L}} = \begin{bmatrix} \text{Pr } k_n^4 & -\text{Pr } k^2 \\ \text{Ra} & -k_n^2 \end{bmatrix}$$

$$k_n^2 := k^2 + (n\pi)^2$$

$$\det(s\widetilde{\mathbf{M}} - \widetilde{\mathbf{L}}) = 0$$

$$s^2 + (1 + \text{Pr}) k_n^2 s + \text{Pr} \left( k_n^4 - \text{Ra} \frac{k^2}{k_n^2} \right) = 0$$


## Dispersion relation

$$s^2 + (1 + \text{Pr}) k_n^2 s + \text{Pr} \left( k_n^4 - \text{Ra} \frac{k^2}{k_n^2} \right) = 0$$

$< 0$

## Condition for instability


$$\text{Ra} > \frac{(k^2 + n^2 \pi^2)^3}{k^2} = \text{Ra}_n(k)$$

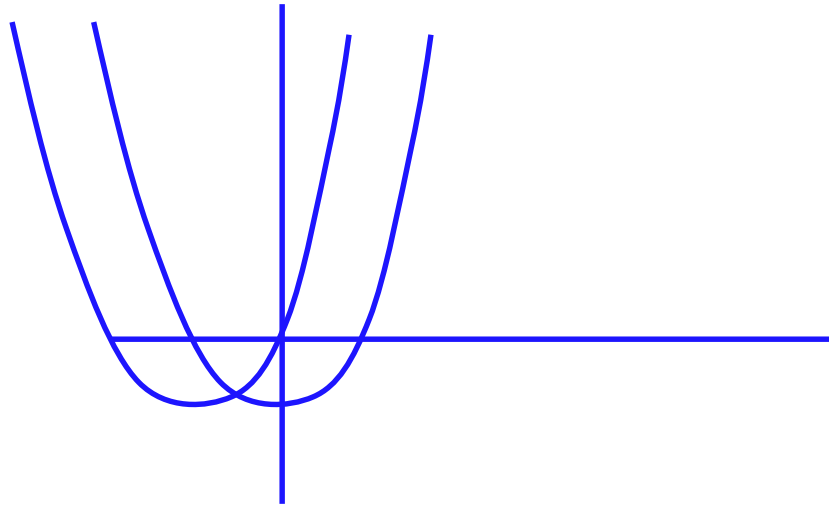


The parabola points upwards  
The sum of the roots is negative

# Condition for instability



$$\text{Ra} > \frac{(k^2 + n^2\pi^2)^3}{k^2} = \text{Ra}_n(k)$$

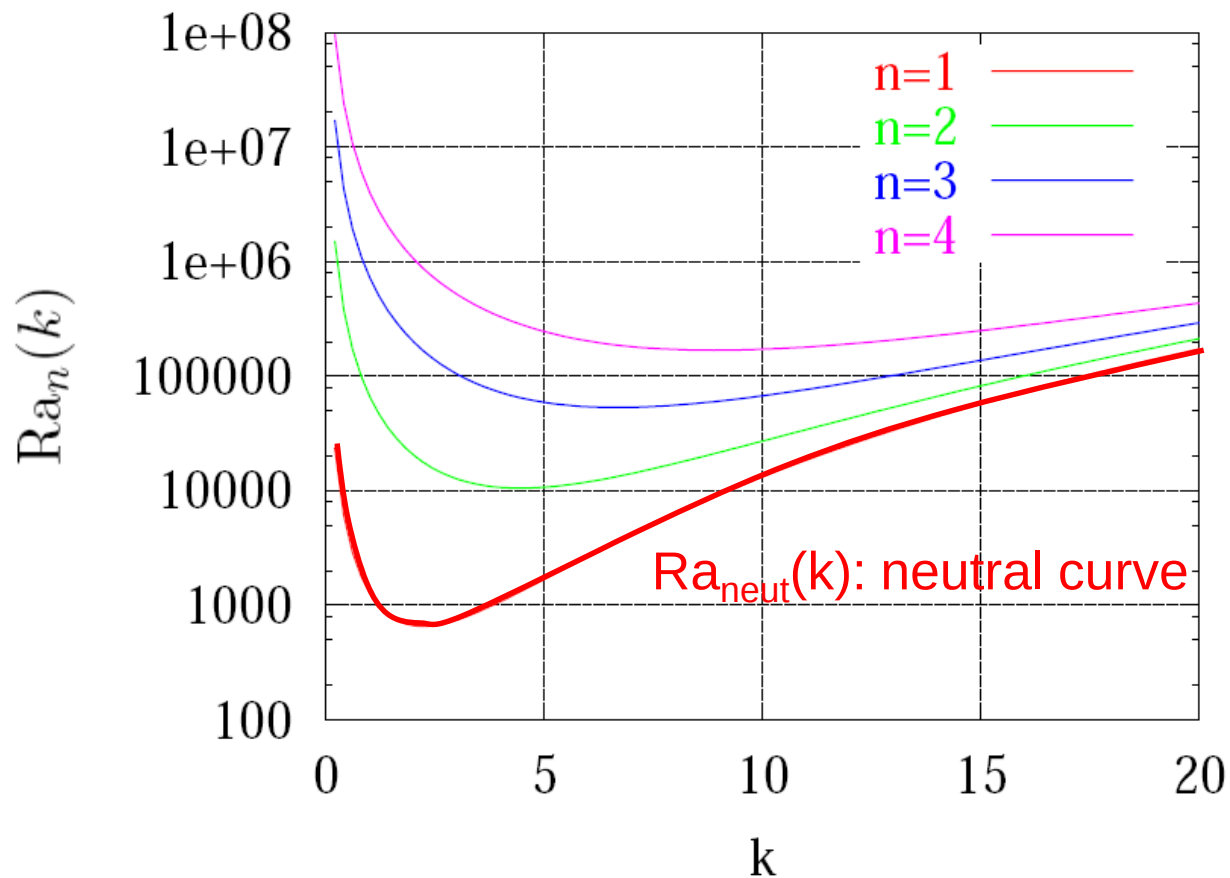

Ra=2000

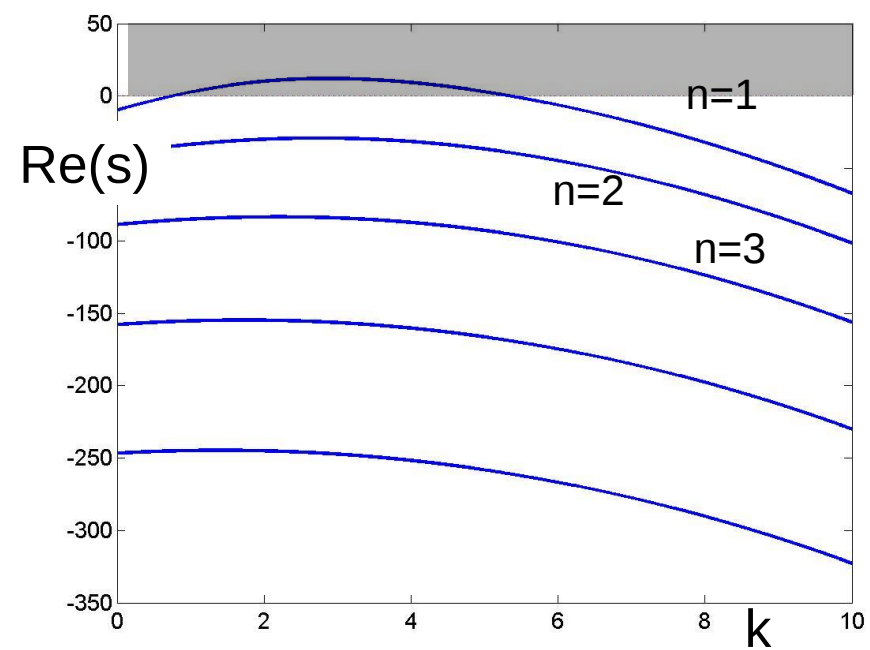

Ra=50000

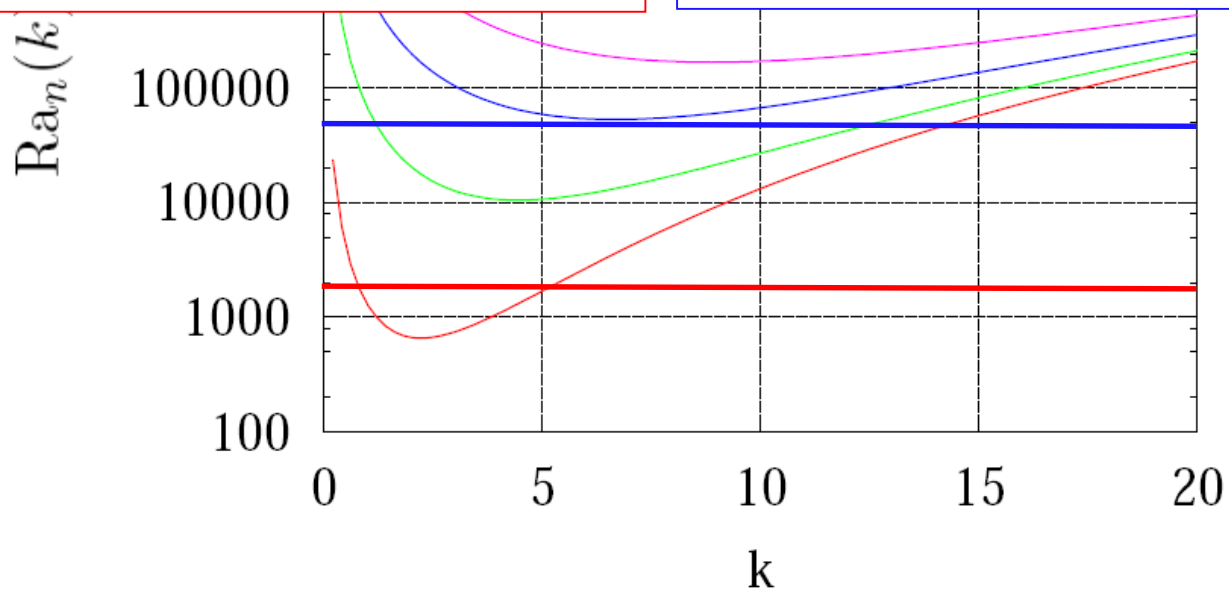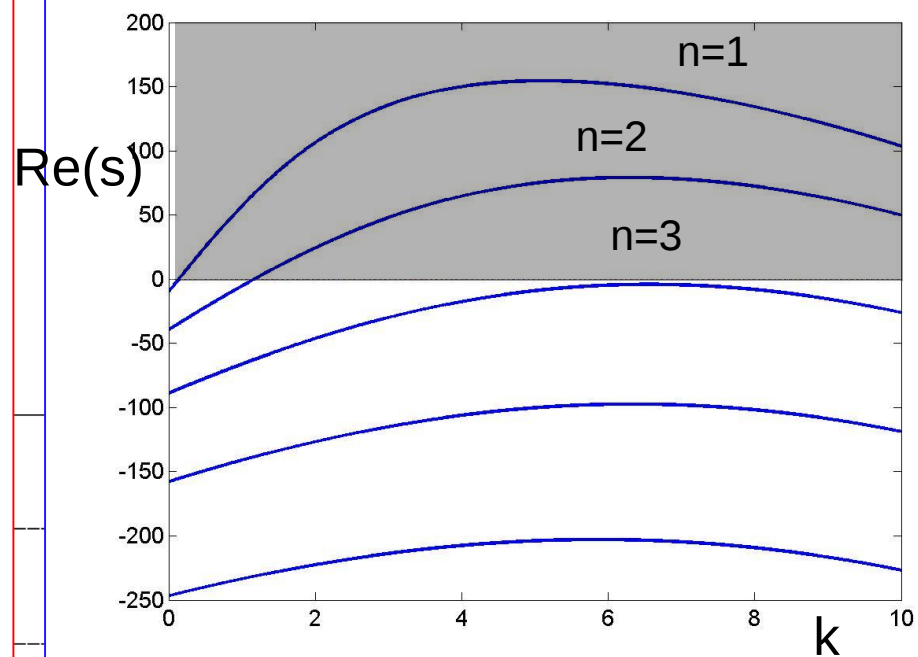

## Marginal curve for instability

$$n = 1 \quad \text{Ra}_{neut}(k) = \frac{(k^2 + \pi^2)^3}{k^2}$$

Minimum minimorum

$$\text{Ra}_c = \min_k \text{Ra}_{neut}(k)$$

$$d\text{Ra}_{neut}/dk = 0.$$

$$\text{Ra}_c = 27\pi^4/4 \sim 657.5, \quad k = \pi/\sqrt{2} \sim 2.22$$

## Stress-free boundary conditions

$$\text{Ra}_c = 27\pi^4/4 \sim 657.5, \quad k = \pi/\sqrt{2} \sim 2.22$$

Experimentally verified only in 69 by Goldstein and Graham



## Rigid boundary conditions

$$\text{Ra}_c = 1707.76 \text{ and } k_c = 3.163.$$

Calculated in '40 by Pellew and Southwell

# 1. Solve Rayleigh-Benard eigenvalue problem

$$s\widehat{M}\widehat{\phi} = \widehat{L}\widehat{\phi}$$

$$\widehat{M} = \begin{bmatrix} D^2 - k^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad \widehat{L} = \begin{bmatrix} \text{Pr}(D^2 - k^2)^2 & -\text{Pr}k^2 \\ \text{Ra} & D^2 - k^2 \end{bmatrix}$$

$$\phi = \widehat{\phi}(z)e^{st+i(k_x x + k_y y)} \quad s = -i\omega \quad \vec{k} = \{k_x, k_y\} \\ k = |\vec{k}|$$

With rigid boundary conditions

$$\widehat{\theta}(z=0) = 0$$


$$\widehat{u}_z(z=0) = 0, \quad (D\widehat{u}_z)(z=0) = 0.$$

$$\widehat{\theta}(z=1) = 0$$

$$\widehat{u}_z(z=1) = 0, \quad (D\widehat{u}_z)(z=1) = 0$$

# How to solve Rayleigh-Benard's equation?

Method 1: Finite differences of order 1.

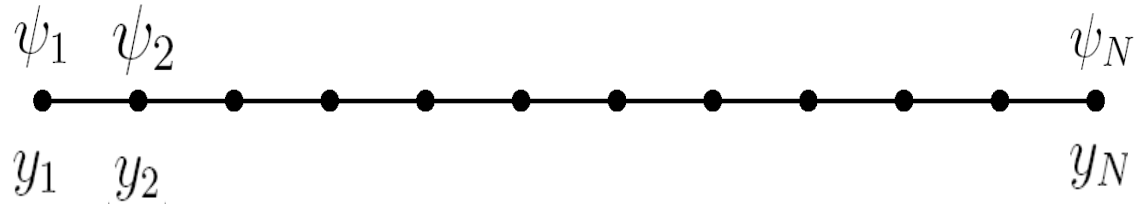

$$\Psi = \begin{pmatrix} \psi(y_1) \\ \psi(y_2) \\ \vdots \\ \psi(y_N) \end{pmatrix} = \begin{pmatrix} \psi_1 \\ \psi_2 \\ \vdots \\ \psi_N \end{pmatrix} \quad \Psi'' = \begin{pmatrix} \psi''(y_1) \\ \psi''(y_2) \\ \vdots \\ \psi''(y_N) \end{pmatrix}$$

# How to solve Rayleigh-Benard's equation?

Method 1: Finite differences

$$\begin{pmatrix} \psi_2'' \\ \psi_3'' \\ \psi_4'' \\ \vdots \\ \psi_{N-3}'' \\ \psi_{N-2}'' \\ \psi_{N-1}'' \end{pmatrix} = \begin{pmatrix} -2 & 1 & 0 & \dots & \dots & \dots & 0 \\ 1 & -2 & 1 & 0 & \dots & \dots & 0 \\ 0 & 1 & -2 & 1 & 0 & \dots & 0 \\ \dots & \dots & \dots & \dots & \dots & \dots & \dots \\ 0 & \dots & 0 & 1 & -2 & 1 & 0 \\ 0 & \dots & \dots & 0 & 1 & -2 & 1 \\ 0 & \dots & \dots & \dots & 0 & 1 & -2 \end{pmatrix} \begin{pmatrix} \psi_2 \\ \psi_3 \\ \psi_4 \\ \vdots \\ \psi_{N-3} \\ \psi_{N-2} \\ \psi_{N-1} \end{pmatrix}$$

Sparse matrix but low order!

## *Finite difference scheme*

Central finite difference scheme second order

Finite difference formulas for first derivatives

$$\left. \frac{\partial u}{\partial x} \right|_{x_i} = \frac{u_{i+1} - u_{i-1}}{2\Delta x} - \frac{\Delta x^2}{6} \left. \frac{\partial^3 u}{\partial x^3} \right|_{x_i} + \dots$$


Finite difference formulas for second derivatives

$$\left. \frac{\partial^2 u}{\partial x^2} \right|_{x_i} = \frac{u_{i+1} - 2u_i + u_{i-1}}{\Delta x^2} - \frac{\Delta x^2}{12} \left. \frac{\partial^4 u}{\partial x^4} \right|_{x_i} + \dots$$

Finite difference formulas for fourth derivatives

$$\left. \frac{\partial^4 u}{\partial x^4} \right|_{x_i} = \frac{u_{i+2} - 4u_{i+1} + 6u_i - 4u_{i-1} + u_{i-2}}{\Delta x^4} - \frac{\Delta x^2}{6} \left. \frac{\partial^6 u}{\partial x^6} \right|_{x_i} + \dots$$

## Rigid boundary condition

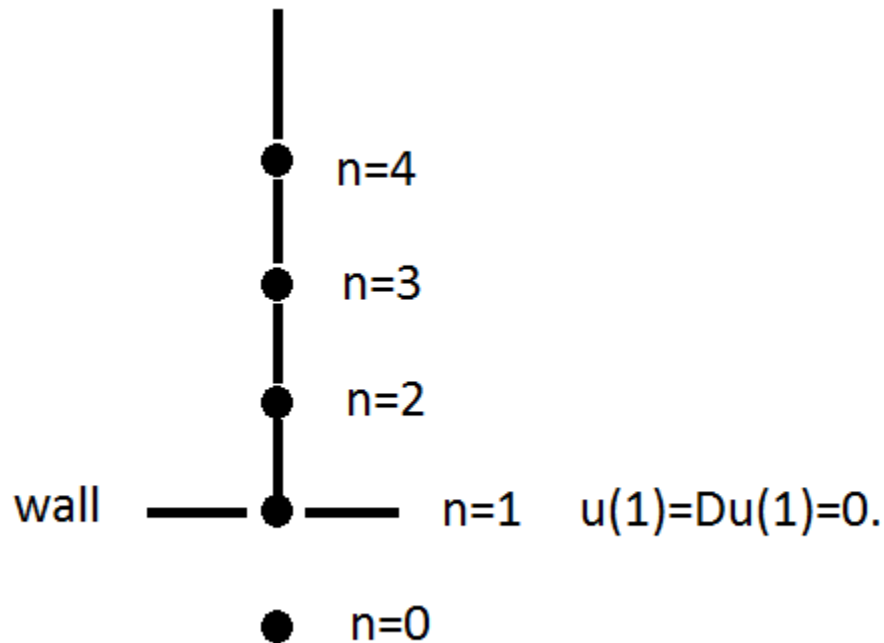

*Boundary condition*

$$u(1) = 0.$$

$$u(2) = u(0)$$

$$\frac{\partial^2 u(2)}{\partial x^2} = \frac{u(1) - 2u(2) + u(3)}{dx^2} = \frac{-2u(2) + u(3)}{dx^2}$$

$$\frac{\partial^4 u(2)}{\partial x^4} = \frac{u(0) - 4u(1) + 6u(2) - 4u(3) + u(4)}{dx^4} = \frac{7u(2) - 4u(3) + u(4)}{dx^4}$$

D2 =

|    |    |    |    |    |
|----|----|----|----|----|
| -2 | 1  | 0  | 0  | 0  |
| 1  | -2 | 1  | 0  | 0  |
| 0  | 1  | -2 | 1  | 0  |
| 0  | 0  | 1  | -2 | 1  |
| 0  | 0  | 0  | 1  | -2 |

D4 =

|    |    |    |    |    |
|----|----|----|----|----|
| 7  | -4 | 1  | 0  | 0  |
| -4 | 6  | -4 | 1  | 0  |
| 1  | -4 | 6  | -4 | 1  |
| 0  | 1  | -4 | 6  | -4 |
| 0  | 0  | 1  | -4 | 7  |

$$s\widehat{\boldsymbol{M}}\widehat{\boldsymbol{\phi}}=\widehat{\boldsymbol{L}}\widehat{\boldsymbol{\phi}}.$$

$$\widehat{\boldsymbol{M}}=\left[\begin{array}{cc} D^2-k^2 & 0 \\ 0 & 1 \end{array}\right];\quad \widehat{\boldsymbol{L}}=\left[\begin{array}{cc} \text{Pr}(D^2-k^2)^2 & -\text{Pr}k^2 \\ \text{Ra} & D^2-k^2 \end{array}\right]$$

$$s\widehat{\mathbf{M}}\widehat{\phi} = \widehat{\mathbf{L}}\widehat{\phi}$$

$$\widehat{\mathbf{M}} = \begin{bmatrix} D^2 - k^2 & 0 \\ 0 & 1 \end{bmatrix}; \quad \widehat{\mathbf{L}} = \begin{bmatrix} \text{Pr}(D^2 - k^2)^2 & -\text{Pr} k^2 \\ \text{Ra} & D^2 - k^2 \end{bmatrix}$$


$$s\widehat{\mathbf{M}}\widehat{\phi} = \widehat{\mathbf{L}}\widehat{\phi}$$

$$\text{eig}(\mathbf{M}^{-1}\mathbf{L}) \text{ or } \det(s\widehat{\mathbf{M}} - \widehat{\mathbf{L}}) = 0.$$

$$f(s) = \det(s\widehat{\mathbf{M}} - \widehat{\mathbf{L}})$$


order of polynomial = 2 \* number of grid point

## *Rigid boundary condition*

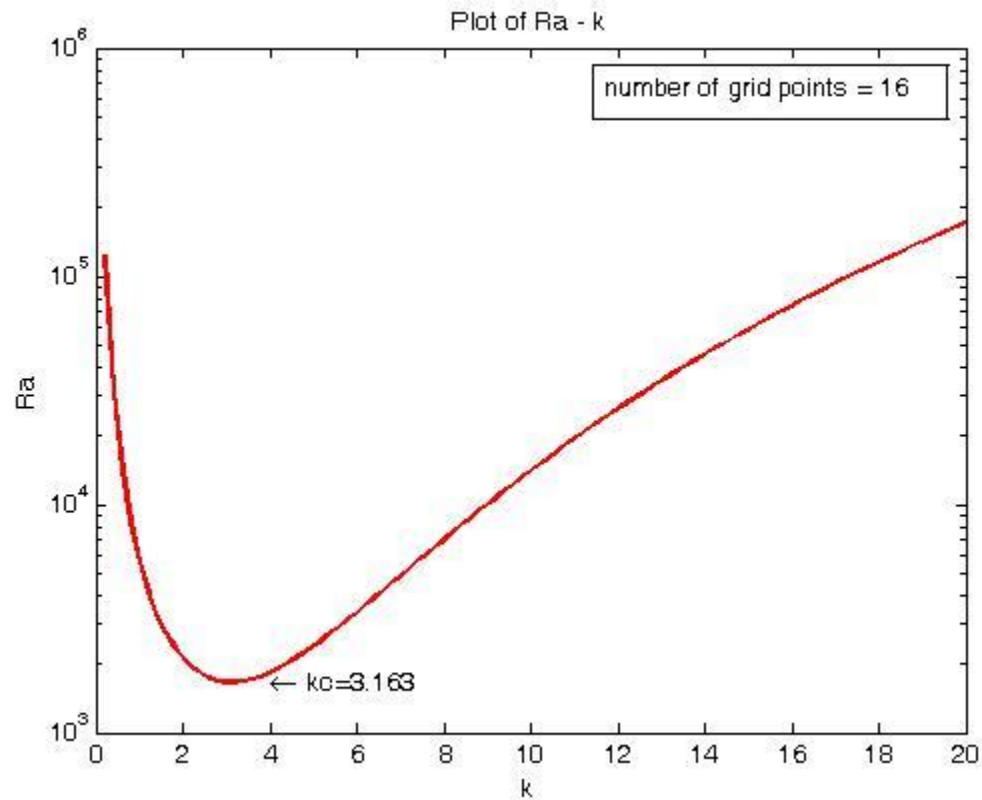

$$Ra_c = 1707.76 \text{ and } k_c = 3.163.$$

## Free stress boundary condition

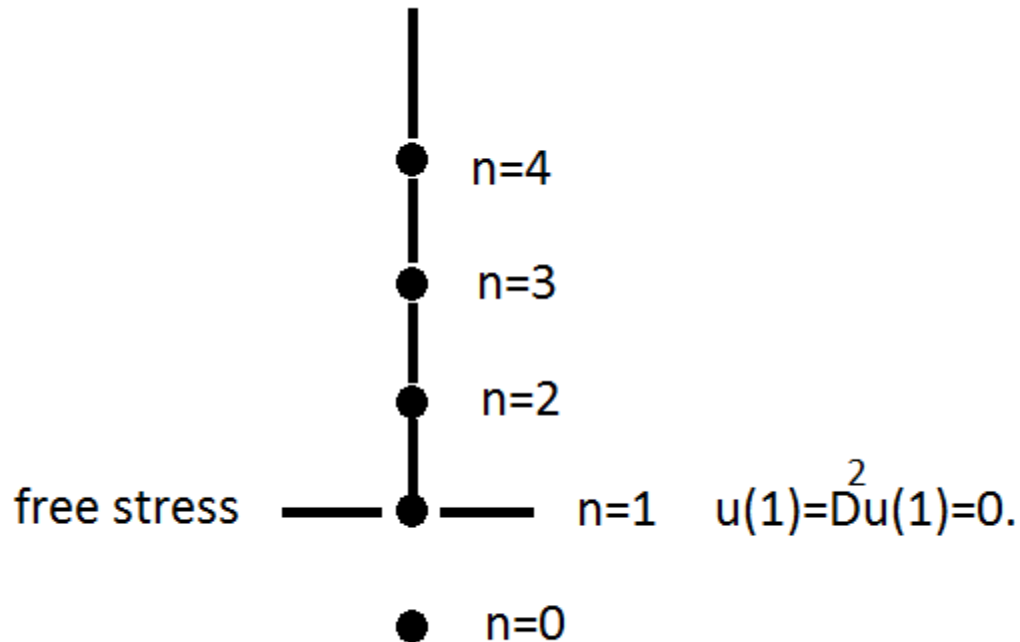

*Boundary condition*


$$u(1) = 0.$$

$$u(2) = -u(0)$$

$$\frac{\partial^2 u(2)}{\partial x^2} = \frac{u(1) - 2u(2) + u(3)}{dx^2} = \frac{-2u(2) + u(3)}{dx^2}$$


$$\frac{\partial^4 u(2)}{\partial x^4} = \frac{u(0) - 4u(1) + 6u(2) - 4u(3) + u(4)}{dx^4} = \frac{5u(2) - 4u(3) + u(4)}{dx^4}$$

## *Free stress boundary condition*

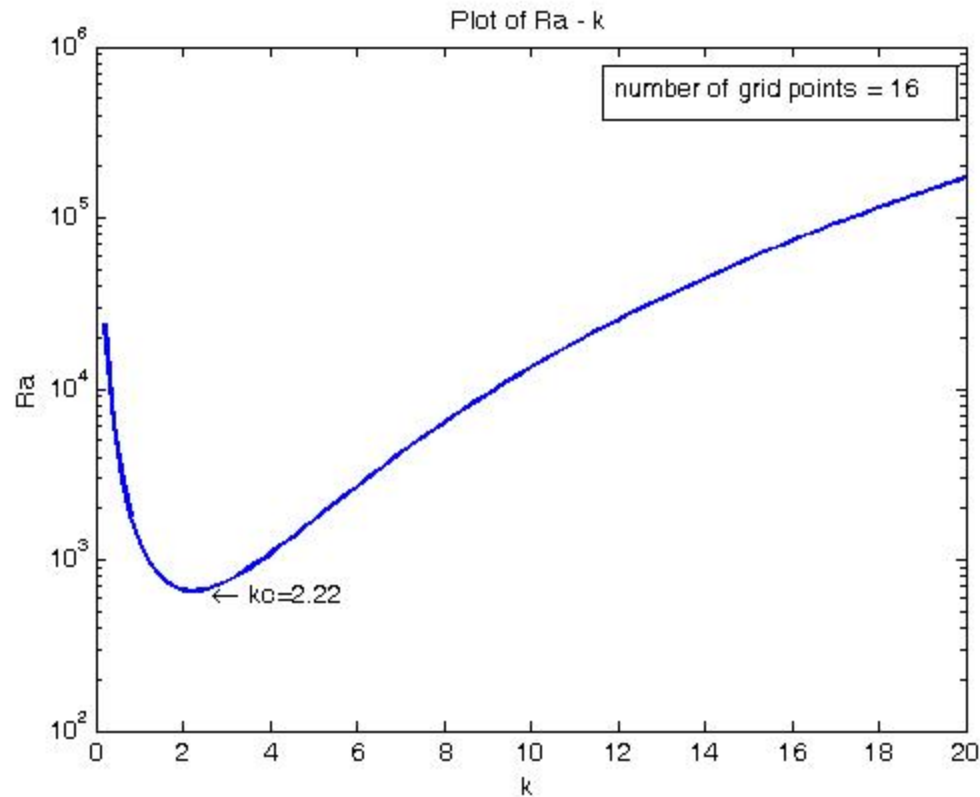

$$Ra_c = 27\pi^4/4 \sim 657.5, \quad k = \pi/\sqrt{2} \sim 2.22$$

# Typical structures : looking at eigenmodes

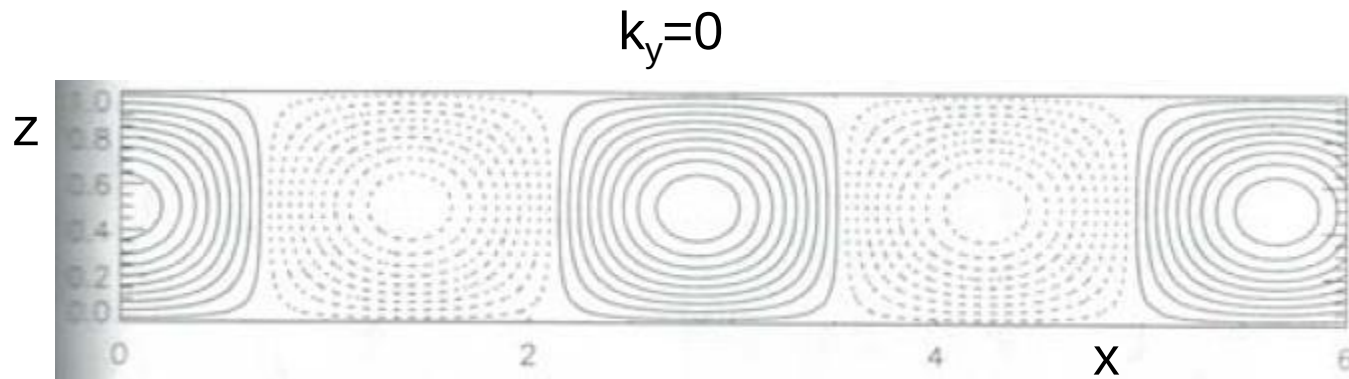


Rolls

# Squares and hexagons

$$k_x = k_y = k_c; A_x = A_y$$


$$A \sin(\pi z) [\cos(k_c x) + \cos(k_c y)]$$

$$A \sin(\pi z) [\cos(k_c x) + \cos(k_c (-x/2 + 3y/2)) + \cos(k_c (x/2 + 3y/2))]$$

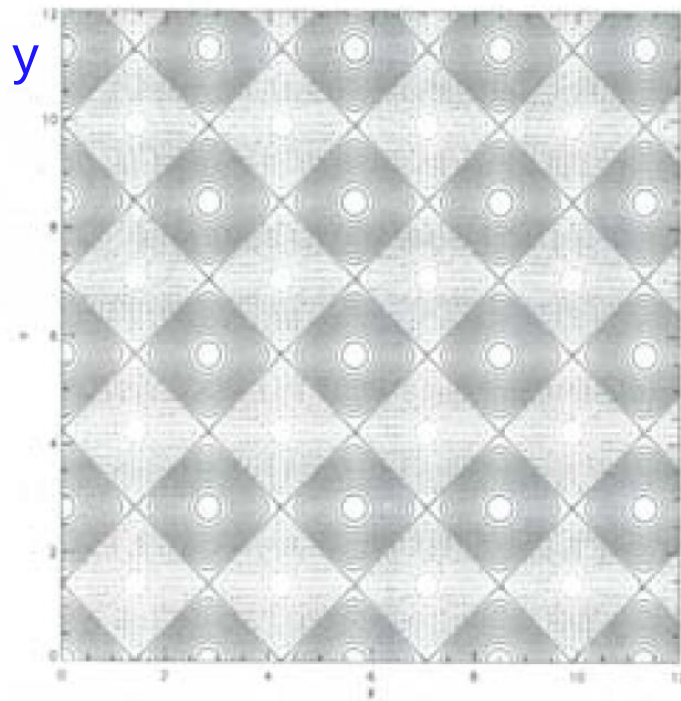

(a)

X

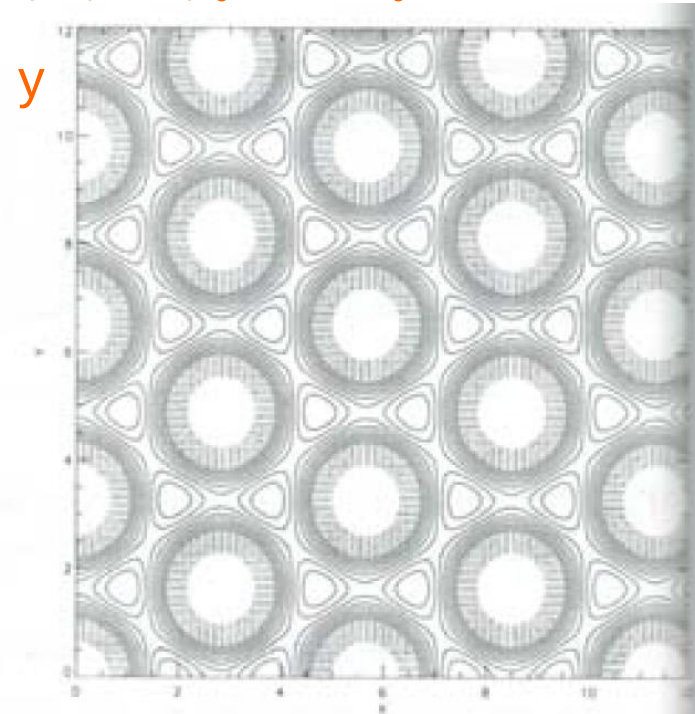


(b)

X

FIG. 7.5 - Figures de convection en carrés (a) ou en hexagones (b). On a tracé les courbes isothermes : en pointillés  $\delta T < 0$ , en trait pleins  $\delta T > 0$ .

# Typical structures : looking at eigenmodes

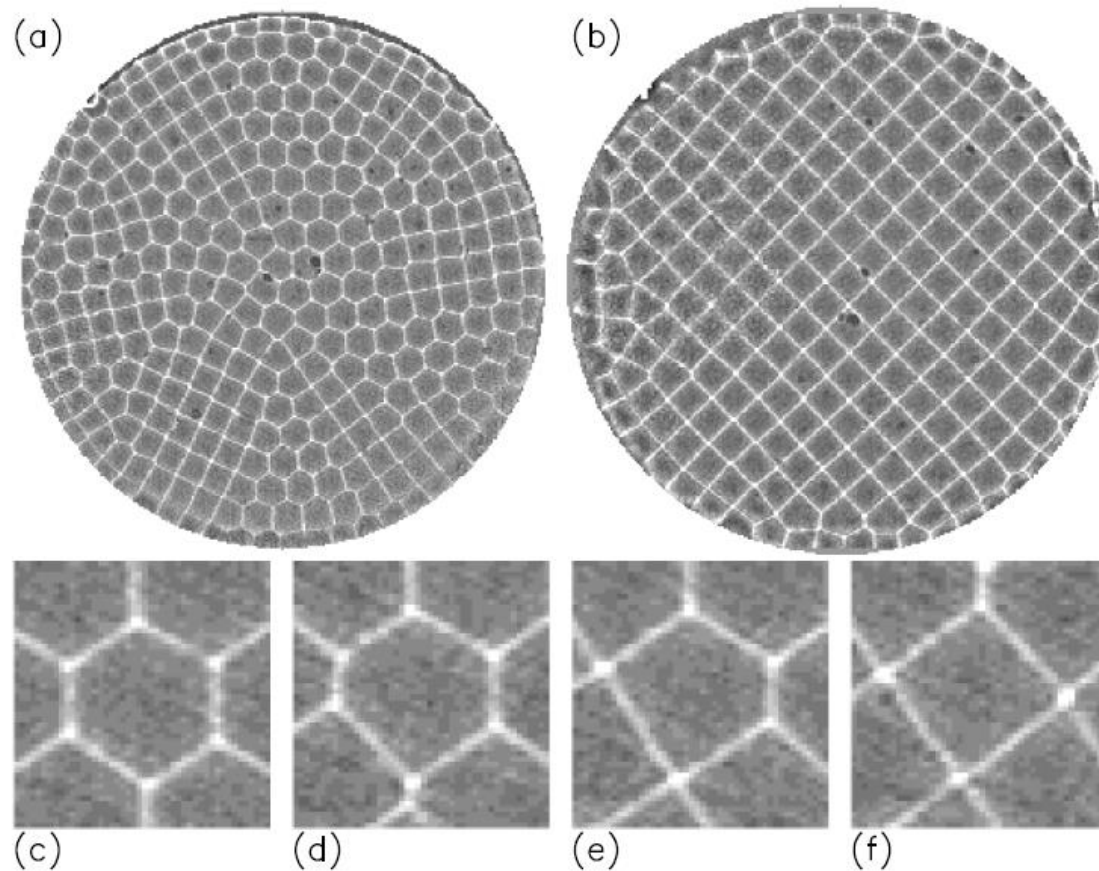

**Figure 7** Transition to square patterns in Marangoni convection for  $d = 0.072$  cm. (a) At  $\epsilon = 3.9$ , a stationary pattern of mixed hexagonal, pentagonal, and square symmetry is observed. (b) At  $\epsilon = 7.23$ , a stationary, nearly ideal square pattern arises. Close observation of a few cells demonstrates local changes in topology from threefold to fourfold vertices as  $\epsilon$  is gradually increased from (c) 2.67, through (d) 2.98, and (e) 3.3, to (f) 3.89.

# Marangoni effect

2 movies

# Marangoni effect

Normal stress

$$\mathbf{n} \cdot \mathbf{T}^1 \cdot \mathbf{n} - \mathbf{n} \cdot \mathbf{T}^2 \cdot \mathbf{n} = \sigma (\nabla \cdot \mathbf{n})$$

# Marangoni effect

Normal stress

$$\mathbf{n} \cdot \mathbf{T}^1 \cdot \mathbf{n} - \mathbf{n} \cdot \mathbf{T}^2 \cdot \mathbf{n} = \sigma (\nabla \cdot \mathbf{n})$$

Stress tensor

Curvature

Inviscid flow

# Marangoni effect

Normal stress

$$\mathbf{n} \cdot \mathbf{T}^1 \cdot \mathbf{n} - \mathbf{n} \cdot \mathbf{T}^2 \cdot \mathbf{n} = \sigma (\nabla \cdot \mathbf{n})$$

Stress tensor                      Curvature

Inviscid flow

$$\mathbf{T} = -p\mathbf{I}$$

$$\mathbf{n} \cdot \mathbf{T} \cdot \mathbf{n} = -p$$

$$p^2 - p^1 = \sigma \nabla \cdot \mathbf{n}$$

# Marangoni effect

Normal stress

$$\mathbf{n} \cdot \mathbf{T}^1 \cdot \mathbf{n} - \mathbf{n} \cdot \mathbf{T}^2 \cdot \mathbf{n} = \sigma (\nabla \cdot \mathbf{n})$$

Stress tensor

Curvature

Inviscid flow

$$\mathbf{T} = -p\mathbf{I}$$

$$\mathbf{n} \cdot \mathbf{T} \cdot \mathbf{n} = -p$$

Laplace law

$$p^2 - p^1 = \sigma \nabla \cdot \mathbf{n}$$

# Marangoni effect

Normal stress  $\mathbf{n} \cdot \mathbf{T}^1 \cdot \mathbf{n} - \mathbf{n} \cdot \hat{\mathbf{T}} \cdot \mathbf{n} = \sigma (\nabla \cdot \mathbf{n})$

Tangential stress  $\mathbf{n} \cdot \mathbf{T}^1 \cdot \mathbf{t} - \mathbf{n} \cdot \mathbf{T}^2 \cdot \mathbf{t} = \nabla \sigma \cdot \mathbf{t}$

Rayleigh Benard flow with stress free B.C. (constant  $\sigma$ )  $\mathbf{T}_{xz} = 0$   
 $\mathbf{T}_{yz} = 0$

When the surface tension  $\sigma$  varies in space: Marangoni effect

# Benard-Marangoni instability

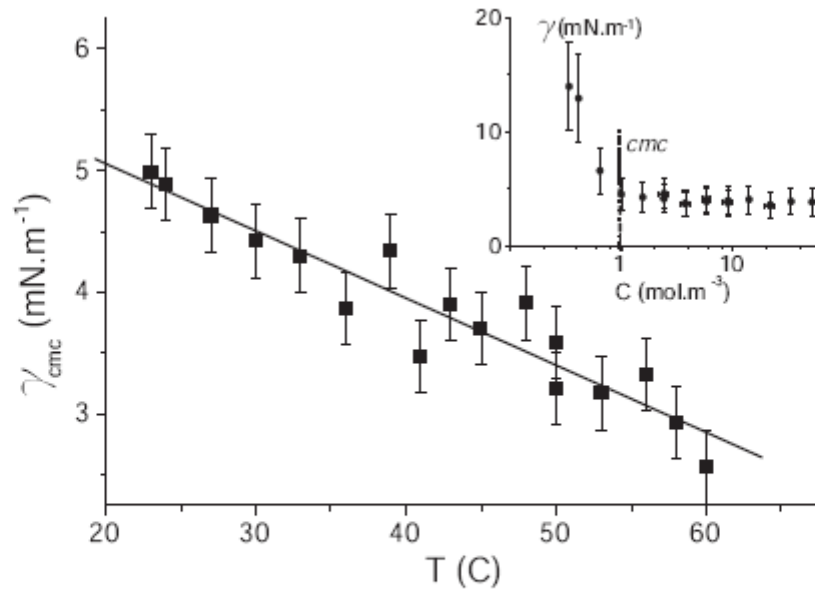


Figure 2: Surface tension of a water in hexadecane drop above the  $cmc$  ( $C = 36cmc$ ) as a function of the bulk oil temperature, fitted with a linear law (solid line). Inset: Surface tension as a function of the concentration  $C$  of surfactant at  $T=28^{\circ}\text{C}$ . The  $cmc$  is estimated at  $1 \text{ mol.m}^{-3}$ .

# Marangoni effect (following J.W. Bush, MIT)



Figure 2: The 'footprint' of a whale, caused by the whales sweeping biomaterial to the sea surface. The biomaterial acts as a surfactant in locally suppressing the capillary waves evident elsewhere on the sea surface. Observed in the wake of a whale on a whale watch from Boston Harbour.

# Marangoni effect (following J.W. Bush, MIT)

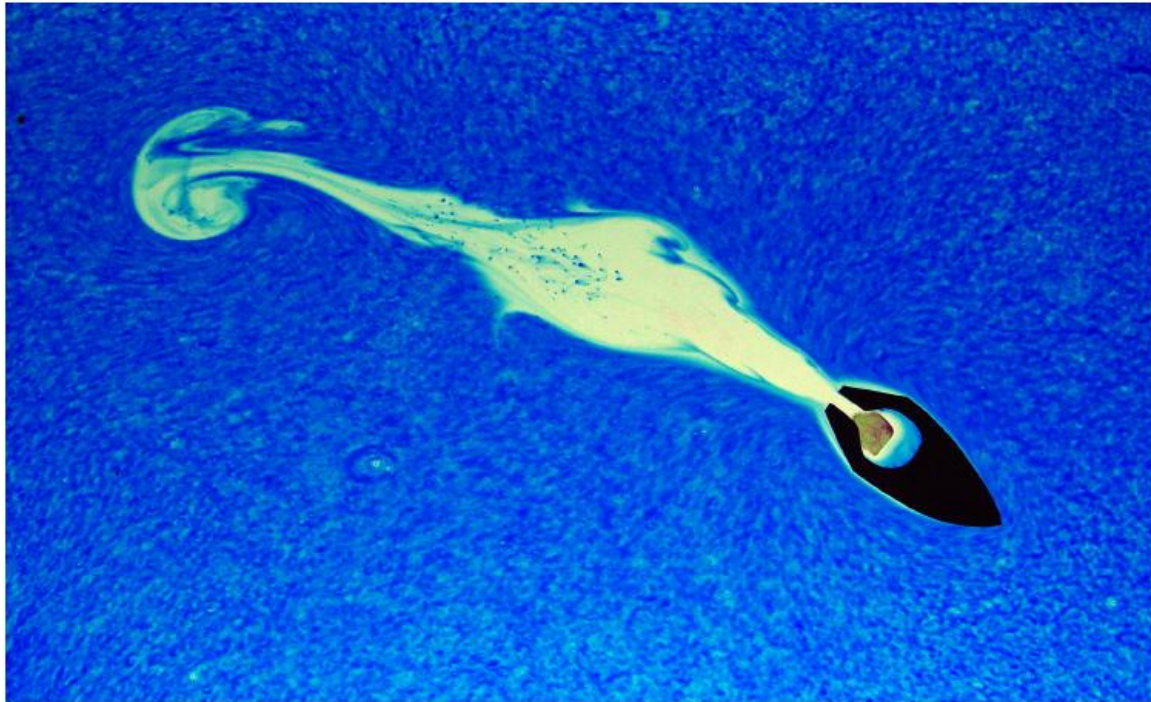


Figure 3: The soap boat. A floating body (length 2.5cm) contains a small volume of soap, which serves as its fuel in propelling it across the free surface. The soap exits the rear of the boat, decreasing the local surface tension. The resulting fore-to-aft surface tension gradient propels the boat forward. The water surface is covered with Thymol blue, which parts owing to the presence of soap, which is visible as a white streak.

# Marangoni effect (following J.W. Bush, MIT)



Figure 1: The tears of wine. Fluid is drawn from the bulk up the thin film adjoining the walls of the glass by Marangoni stresses induced by evaporation of alcohol from the free surface.

# Benard-Marangoni instability

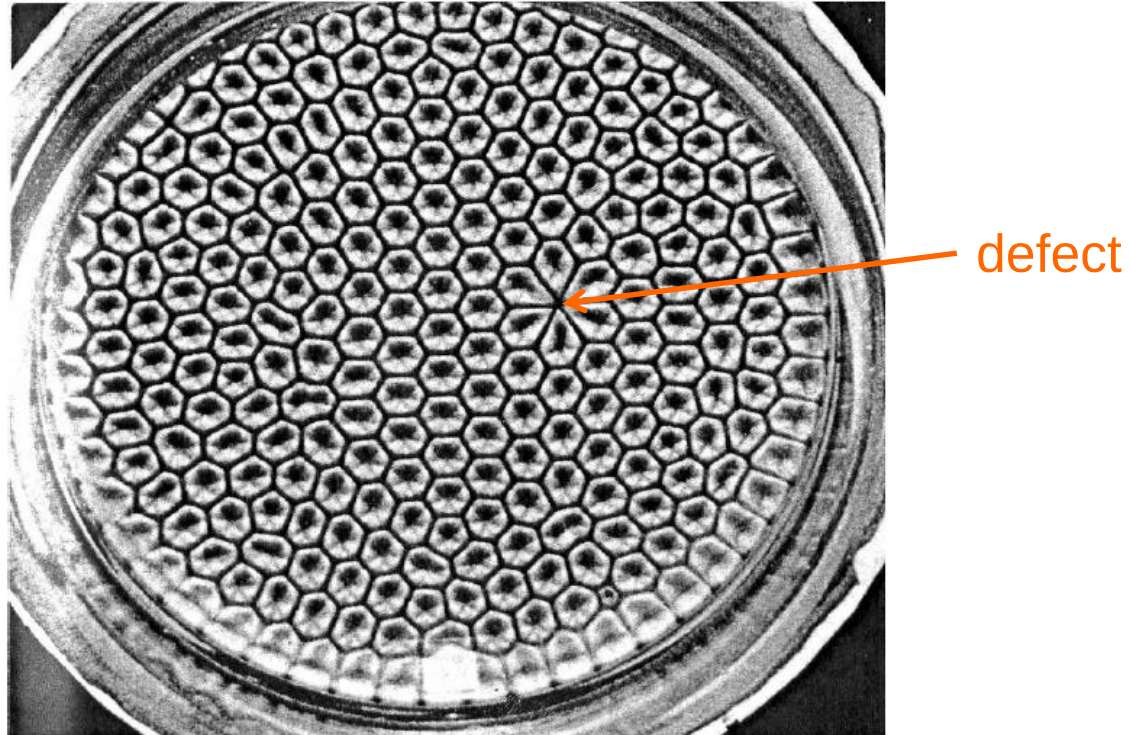


FIG. 2.16 – *Cellules de convection thermo-capillaire dans une fine couche d'huile silicone de viscosité  $0,5 \text{ cm}^2/\text{s}$ . Photo Koschmieder, 1974 (Van Dyke 1982).*

# Benard-Marangoni instability



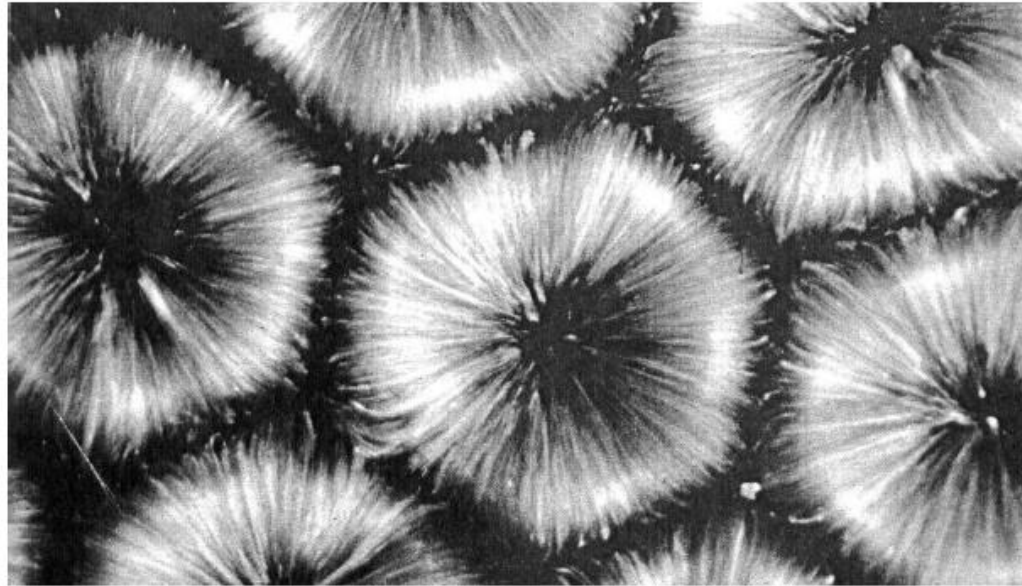


FIG. 2.17 – *Vue de dessus de cellules de convection thermo-capillaire dans une couche d'huile silicone de 1mm d'épaisseur, surmontée par de l'air. La lumière réfléchiée par des particules d'aluminium montre le fluide montant au coeur de la cellule hexagonale et descendant sur les bords. Le temps d'exposition est de 10 secondes, et le fluide traverse la cellule du centre au bord en 2 secondes. La dimension des cellules est 3,6 mm. Cliché Velarde, Yuste & Salan (Van Dyke 1982).*


# Benard-Marangoni instability

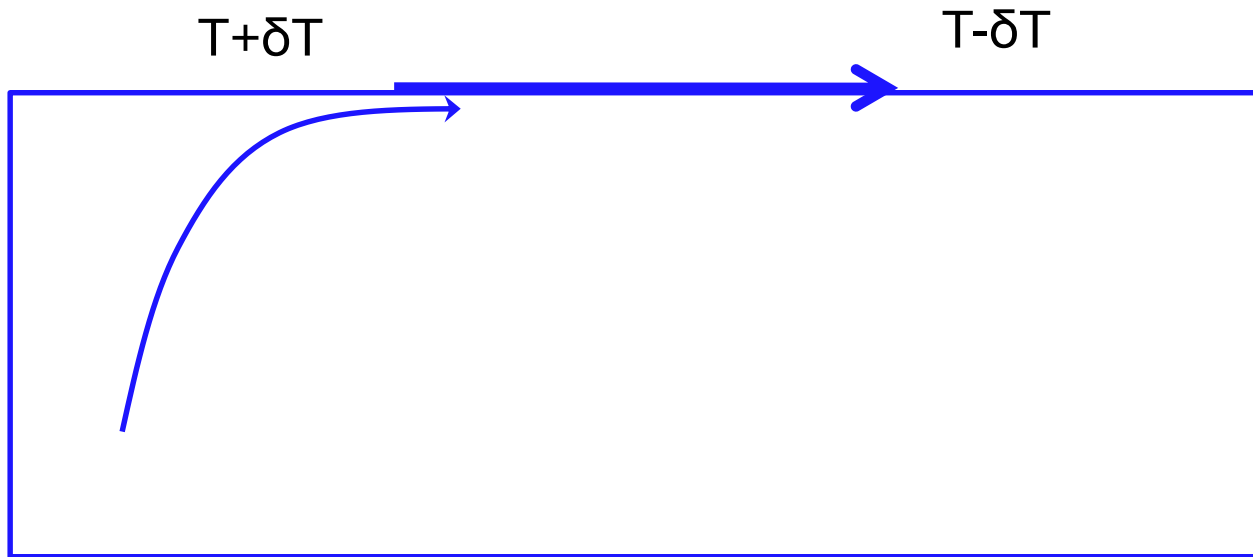


# Benard-Marangoni instability

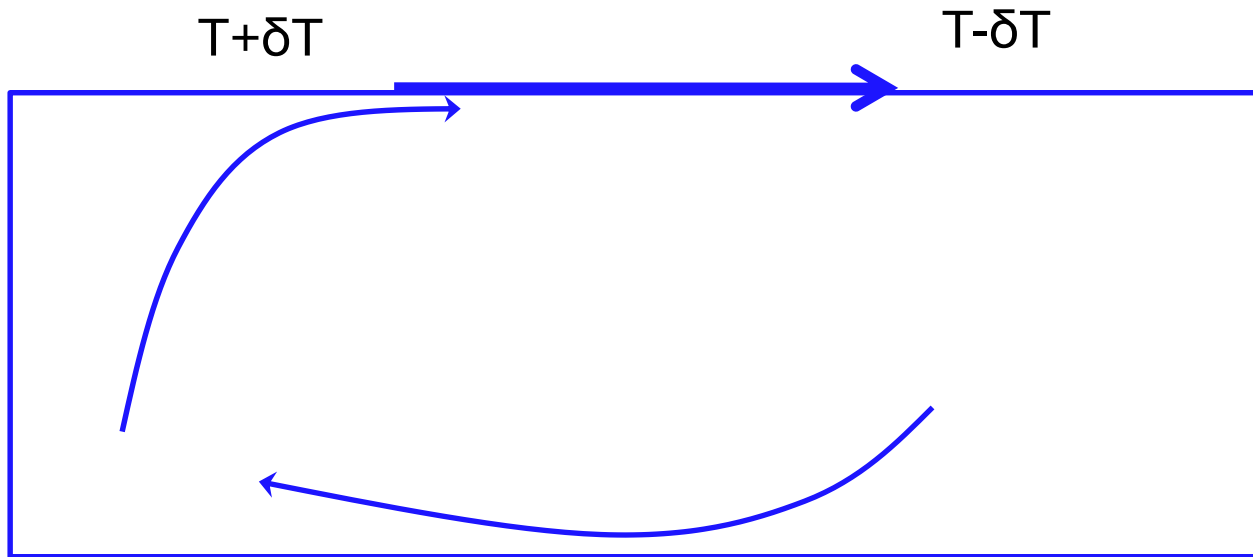

# Benard-Marangoni instability

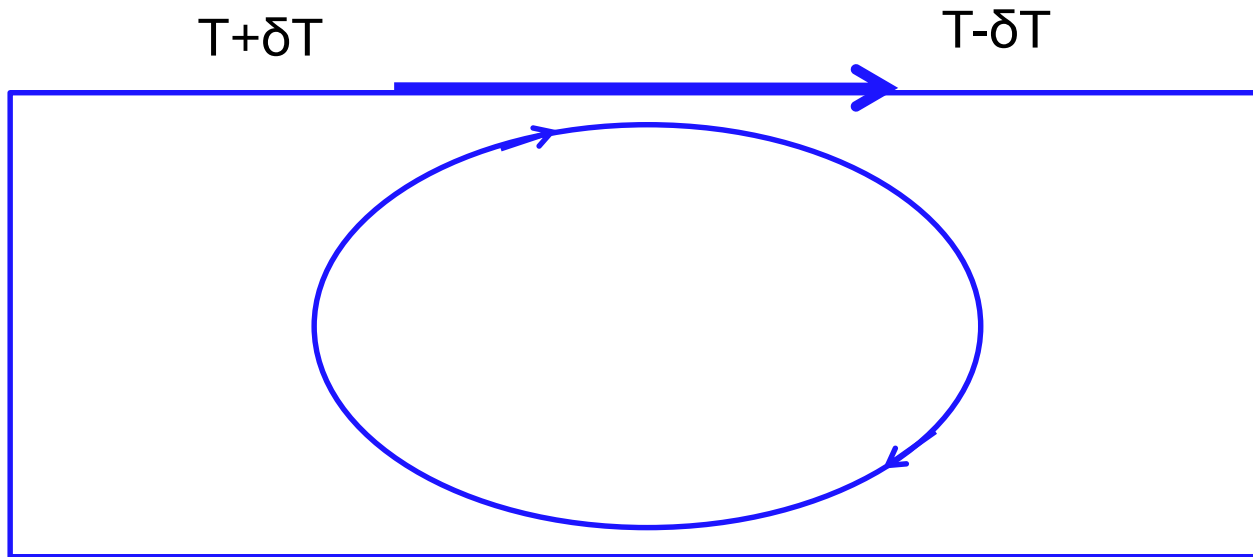

# Benard-Marangoni instability

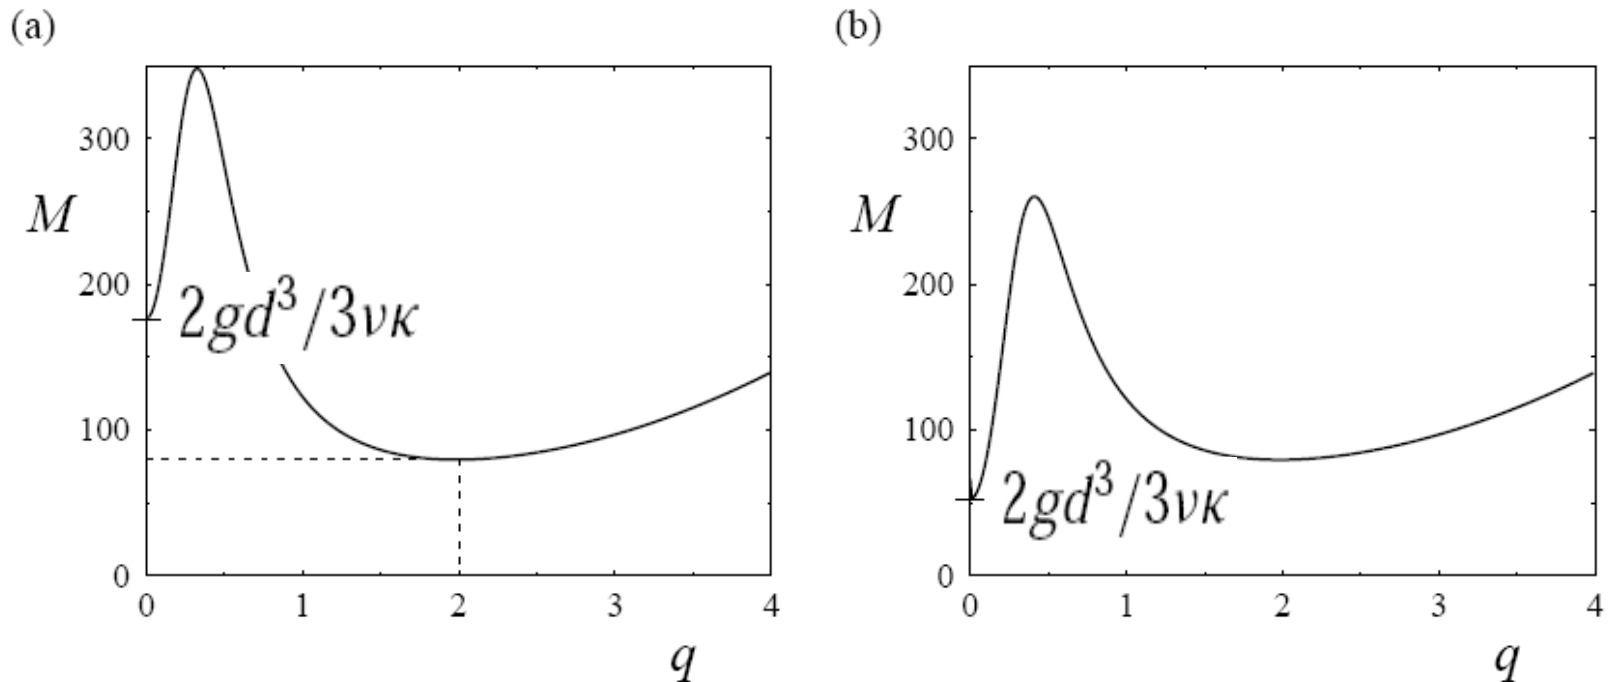

**Figure 2** Marginal stability curves for Marangoni convection indicate two different types of primary instabilities can typically arise. The stability curves are computed for  $\nu = 0.10 \text{ cm}^2 \text{ s}^{-1}$  silicone oil under terrestrial gravity with  $d \ll d_g$ . (a) Short-wavelength modes ( $q \neq 0$ ) are primary for thick oil layers; instability of these modes leads to the classic cellular flows studied by Bénard (1900). (b) For sufficiently thin oil layers ( $d \leq 0.03 \text{ cm}$ ), the global minimum is at  $q = 0$ , and modes with long-wavelength deformation of the interface become primary.

$$M = \sigma_T \Delta T d / \rho \nu \kappa$$

Marangoni number