

# Irrigation and Drainage Engineering

(Soil Water Regime Management)

(ENV-549, A.Y. 2025-26)

4ETCS, Master option

**Prof. Paolo Perona**

Platform of Hydraulic Constructions



Lecture 8-1. Micro-irrigation:  
Deployment of drippers,  
risks and fertigation


# Drippers classification

This is done depending on how pressure is dissipated

## a) Perforations made directly on the ramp = perforated sheaths :



- Single wall
- Double wall (Bi - Wall)

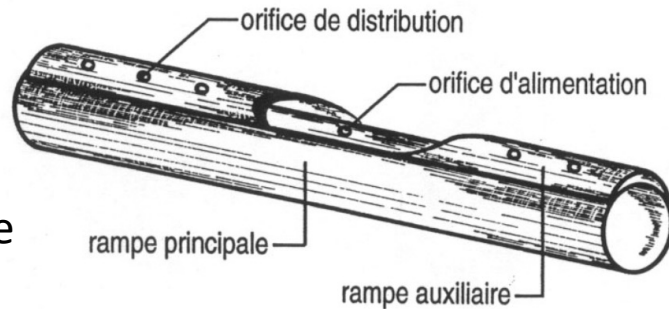

Bi-Wall pipe

This system is particularly suitable for cultures planted in lanes (CM)



## b) Long-circuit drippers :

- Capillary tube drippers
- Helical circuit drippers
- Turbulence effect drippers



## c) Short circuit drippers :


- Orifice drippers
- Vortex drippers






## d) Pressure-compensated drippers

Fruit growing, viticulture, etc.



# Capillary tube drippers

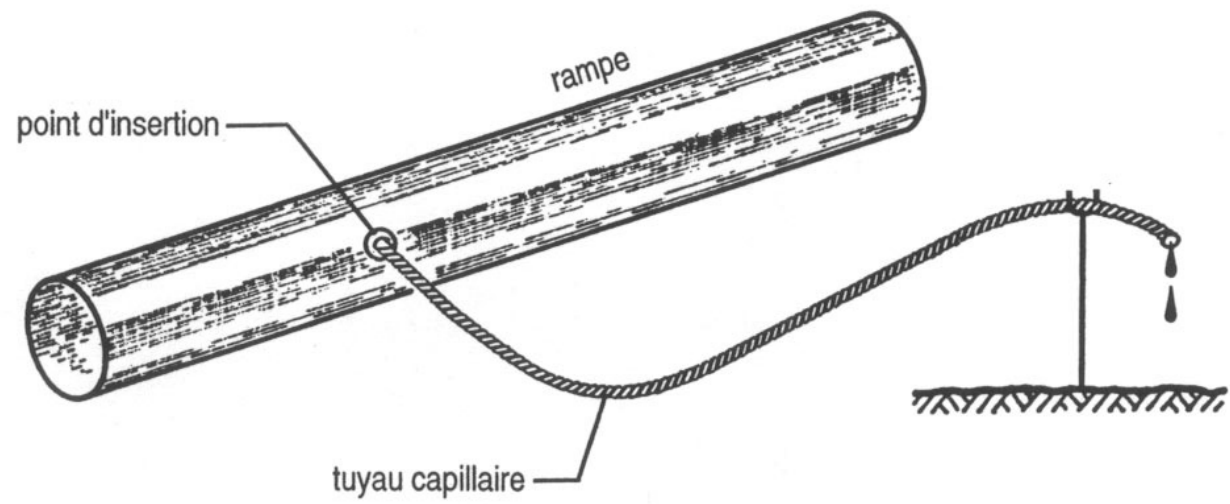


# Pressure-compensated drippers (on-line)

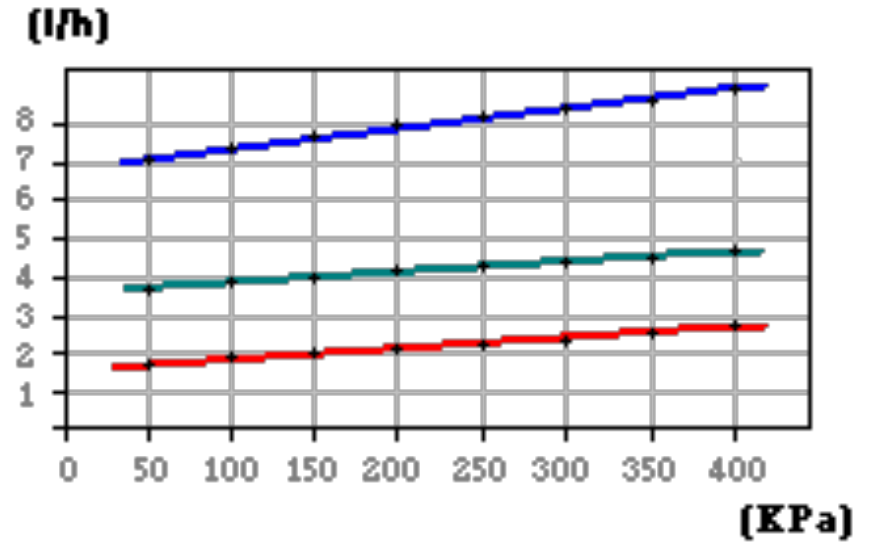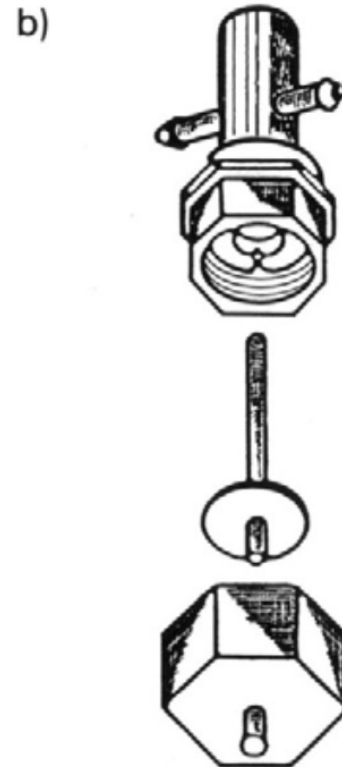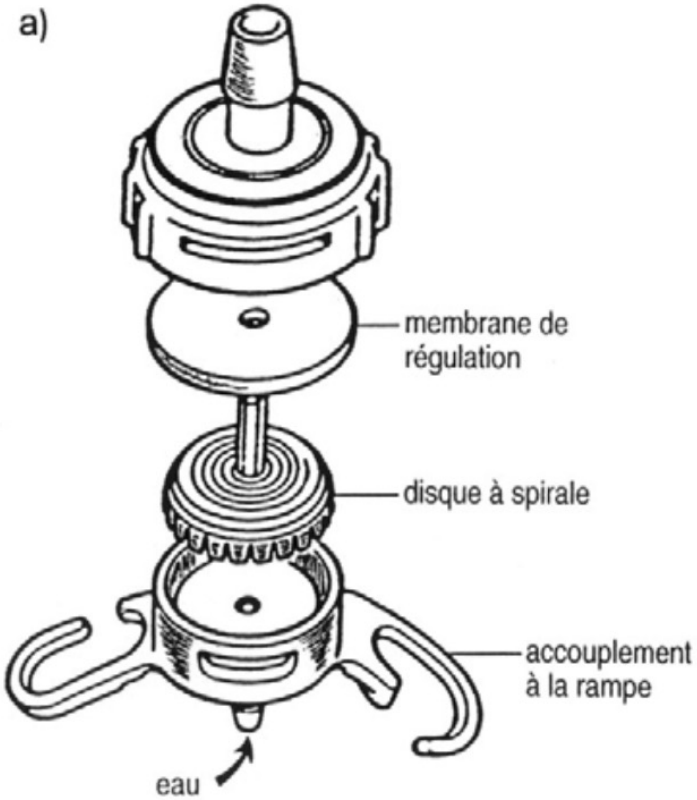

# Pressure-compensated drippers (in-line)

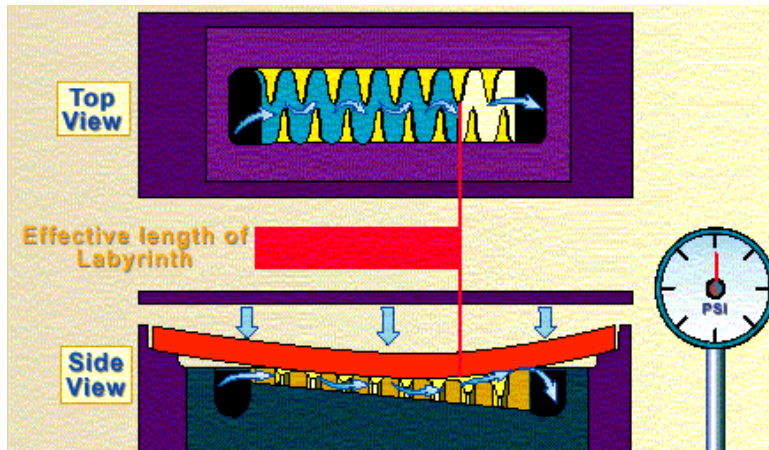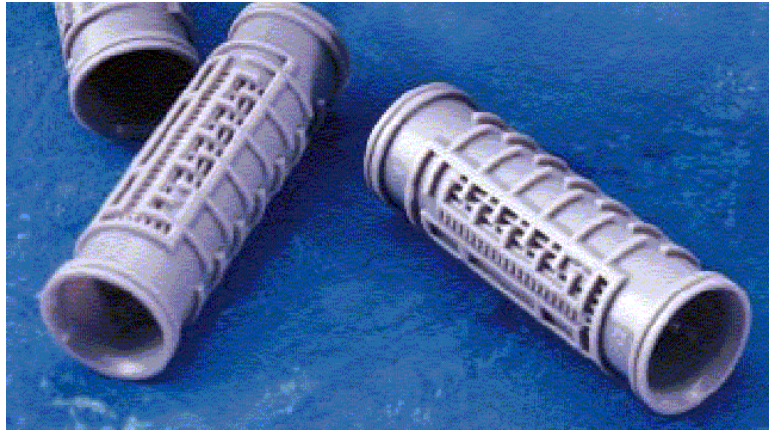

## Flow Rate vs Pressure

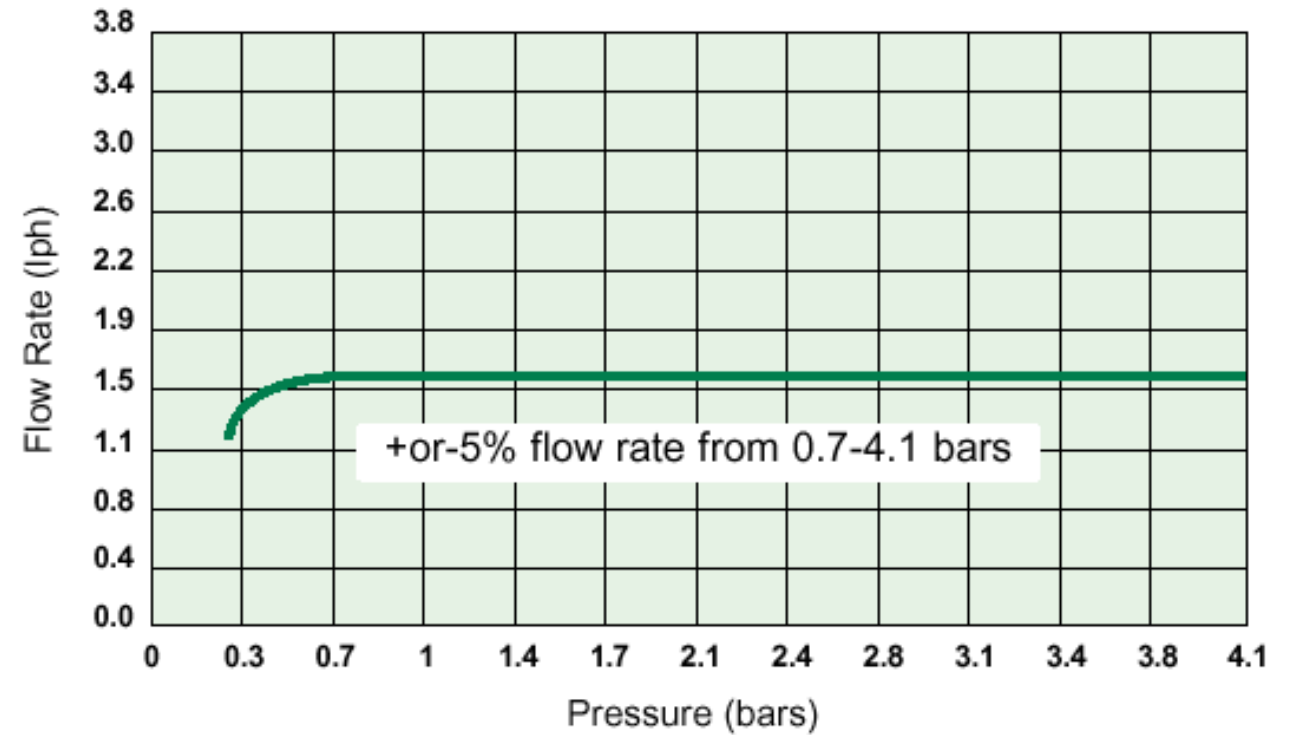


# Variants

Single-drip version



Multi-drip version

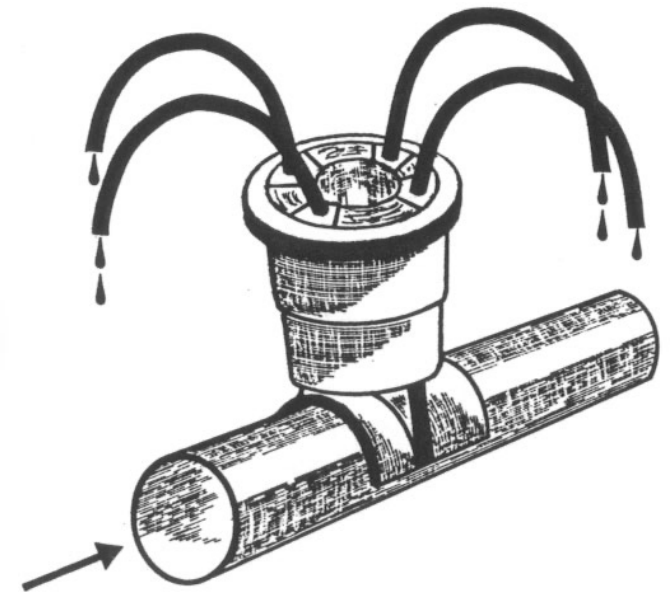

# Mounting the drippers


Dripper spacing and ramp spacing depend on :

- the type of crop
- characteristics of the humidification bulb

Size, shape and moisture content of the bulb :

- ✓ hydraulic properties of the soil
- ✓ dripper flow
- ✓ frequency and duration of irrigation
- ✓ climatic conditions
- ✓ type of crop

The lateral extension of the bulb is generally between 0.5 and 2.0 m.

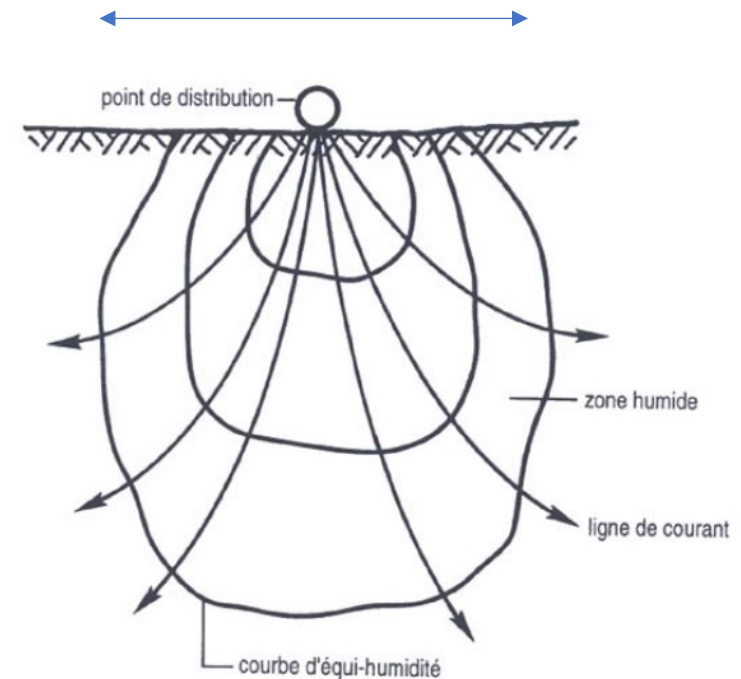

→ Usual dripper spacing: 0.5 to 2 m.

$$K(h) = K_s e^{\alpha h} \quad (1)$$

$\alpha$  est une constante caractéristique du sol, plus élevée dans les sols grossiers que dans les sols fins.


$$q = \frac{\pi \rho^2 i}{1000} \quad \text{soit,} \quad \rho = \sqrt{1000 \frac{q}{\pi i}}$$

$q$  : débit du goutteur, en  $l \cdot h^{-1}$   
 $i$  : capacité d'infiltration, en  $cm \cdot h^{-1}$

Steady state  $i \rightarrow K_s \quad \rightarrow \quad \rho = \sqrt{1000 \frac{q}{\pi K_s}}$

If suction is important, then (Wooding 1968)

$$\rho = -\frac{2}{\alpha \pi} + \sqrt{\frac{4}{\alpha^2 \pi^2} + 1000 \frac{q}{\pi K_s}}$$

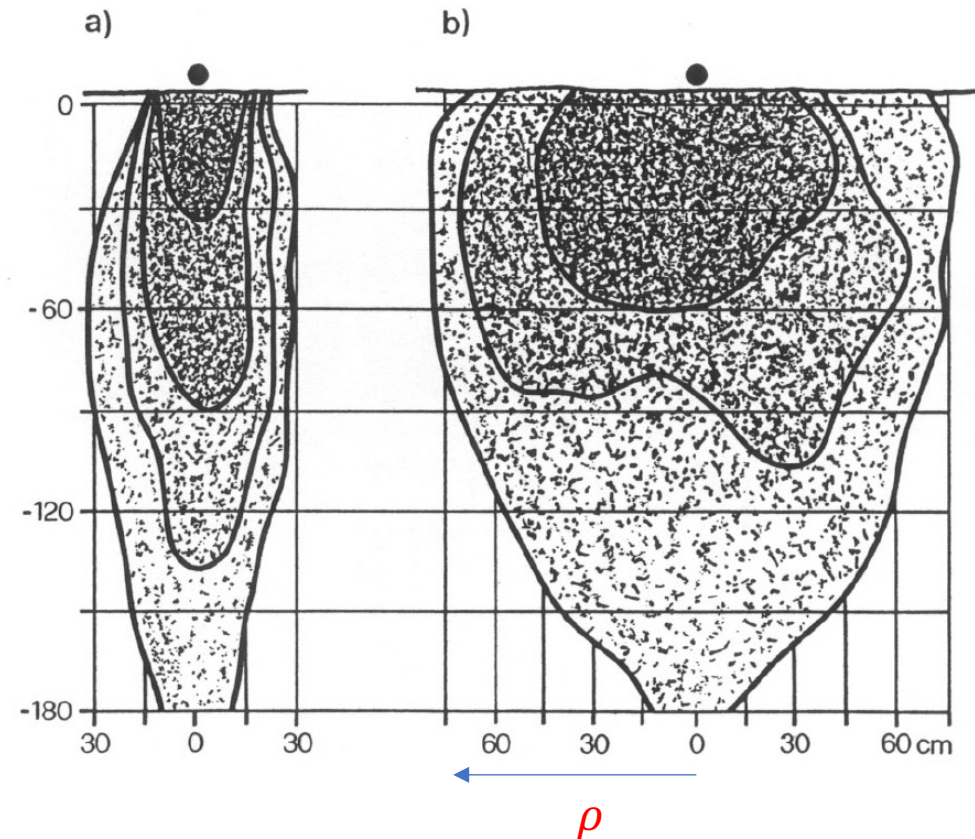


$$\frac{\delta\theta}{\delta t} = \frac{\delta}{\delta r} \left( K(\theta) \frac{\delta h}{\delta r} \right) + \frac{K(\theta)}{r} \frac{\delta h}{\delta r} + \frac{\delta}{\delta z} \left( K(\theta) \frac{\delta H}{\delta z} \right) \quad \text{Richards equation (unsaturated soil)}$$

$$\xi = r / \rho$$

et:  $a = \alpha \rho / 2$

- $r$  : distance radiale entre le goutteur et la zone où  $h = h_c$
- $\rho$  : rayon de la tache saturée de surface (éq. 19)
- $\alpha$  : paramètre de la relation  $K(h)$

- 1.- déterminer les paramètres  $\alpha$  et  $K_s$  du sol et se fixer une valeur de la charge de pression critique  $h_c$
- 2.- calculer le rayon  $\rho$  de la tache saturée de surface, à partir de l'équation
- 3.- déterminer la valeur du rapport  $S / S_s$
- 4.- calculer la valeur de  $a$
- 5.- rechercher la valeur du rayon adimensionnel  $\xi$  au moyen de la figure 23
- 6.- en déduire la valeur de  $r$  (éq. 24) et celle de l'espacement  $s = 2r$  entre les goutteurs.

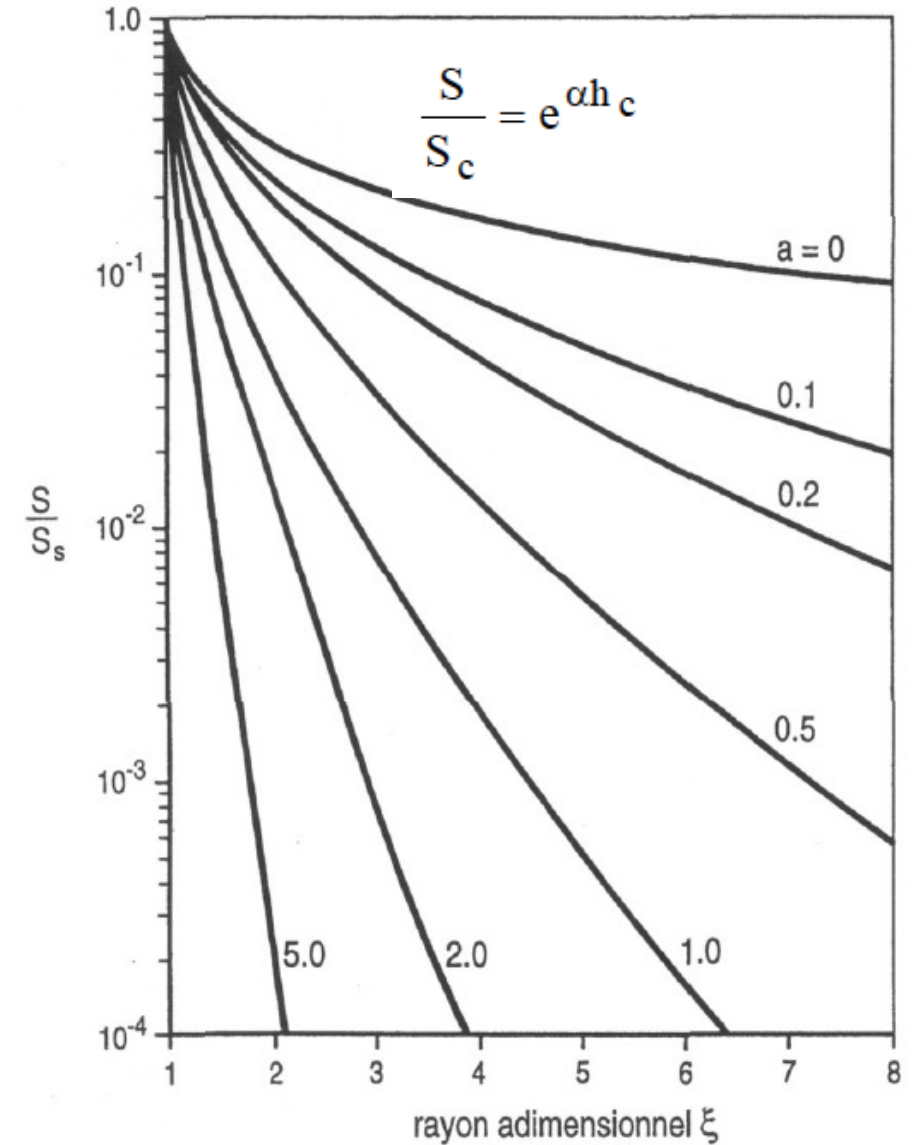

# Obstruction risk

- PHYSICAL (mineral or organic particles)
- CHEMICAL (carbonates, oxides, sulphides, etc.)
- BIOLOGICAL (algae, bacteria, spores, etc.)

→ *Filter unit essential*

Depending on the case, all or some of the following devices:

- Pre-filtration device
- Sand filter
- Strainer

# Sizing main pipes and trapeze holders

## Formule de Hazen-Williams

$$j = 2.78 \cdot 10^{-6} \left( \frac{Q}{C} \right)^{1.852} D^{-4.87}$$

$j$  : linear head loss

$Q$  : pipe flow rate (m<sup>3</sup>/h)

$D$  : pipe diameter (m)

$C$  : head loss coefficient

Plastic pipes:  $120 < C < 150$

Cast iron pipes:  $100 < C < 130$

Steel pipes:  $100 < C < 110$

## Formule de Darcy-Weisbach

$$j = \frac{\lambda}{D} \frac{v^2}{2g} = \frac{\lambda}{D} \frac{Q^2}{2gS^2}$$

$j$  : linear pressure drop

$D$  : pipe diameter

$v$  : average water velocity

$Q$  : pipe flow rate

$S$  : pipe cross-section

$\lambda$  : head loss coefficient

# Ramps design

The ramp is the conduit that feed the drippers, i.e. to which the drippers are either on-line or in-line connected.

$Q = N q$  flowrate entering the ramp

$N = L/s$  N, number of drippers; L= ramp length  
s, interspace between drippers

Qualités exigées:

- ✓ *flexible*
- ✓ *non-corrosive*
- ✓ *resistant to radiation*
- ✓ *easy to handle*
- ✓ *opaque*

## Formule de Hazen-Williams

$$\Delta H = 2.78 \cdot 10^{-6} F L D^{-4.87} \left( \frac{Nq}{C_g} \right)^{1.852}$$

$\Delta H$ : pressure drop in the ramp (m)\*

L : length of ramp (m)

D : boom/ramp diameter (m)

N : number of drippers on the boom

q : average dripper flow rate (m<sup>3</sup>/h)

F : flow reduction coefficient (N > 20, F = 0.36)


C<sub>g</sub>: head loss coefficient (80 < C<sub>g</sub> < 140)

\*  $\Delta H = \Delta H_i / 3$ , estimate from the total loss as the ramp would deliver the whole flow

# Chemigation and fertigation

Chemigation is a general term associated to the artificial apportion of chemical either organic or inorganic compounds, whose function is the status preservation or improvement of plant, water, soil and maintenance.

Fertigation is the generically referred to chemical provided to plant crops

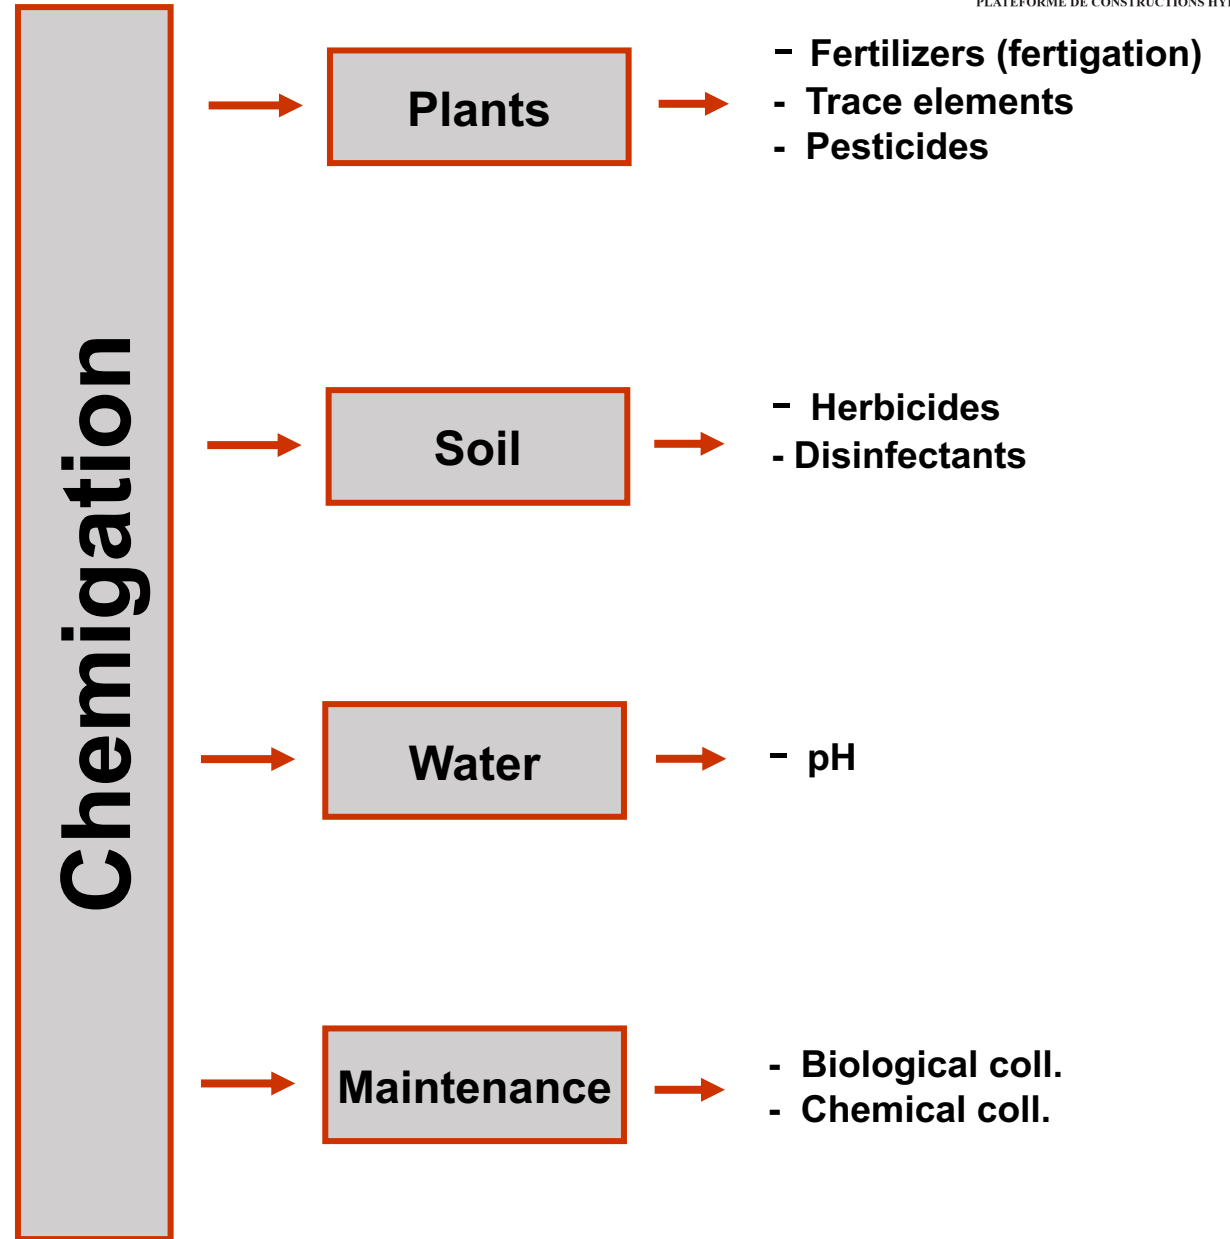

## Fertigation success factors

### a) Installation design

- ✓ non-return valve
- ✓ sieve filter after injection system
- ✓ even water distribution



### b) Wise choice of fertilisers

(especially phosphate fertilisers)


- ✓ use acidifying phosphate fertilisers
- ✓ if necessary, lower the pH → 7

### c) Adequacy of supply/needs

### d) Rinsing after injection

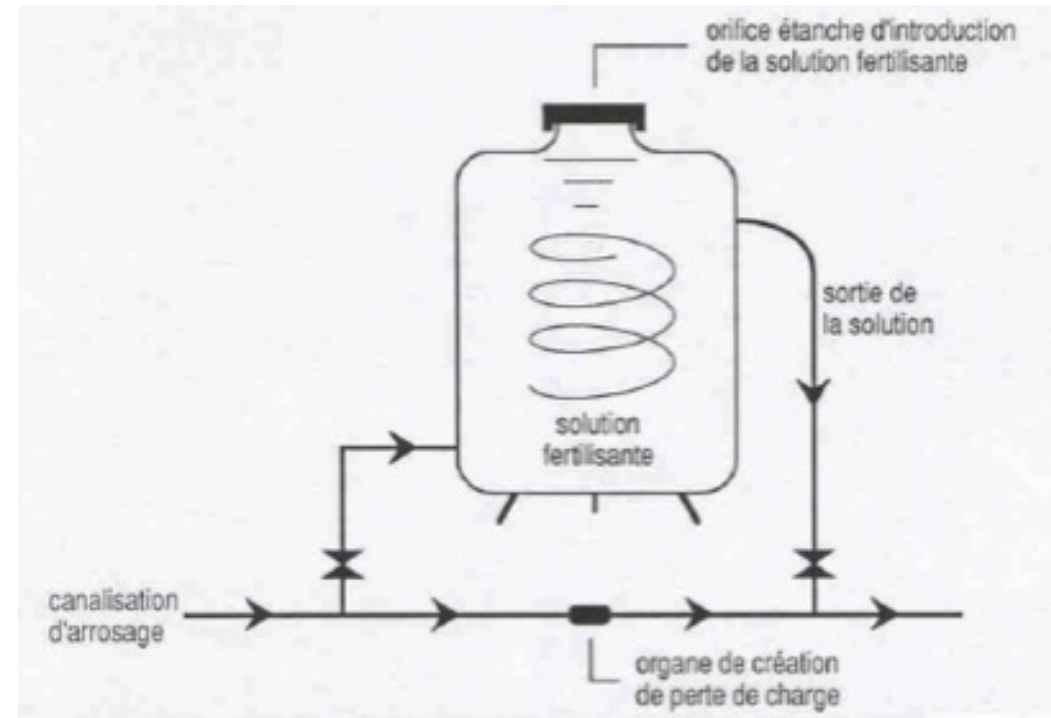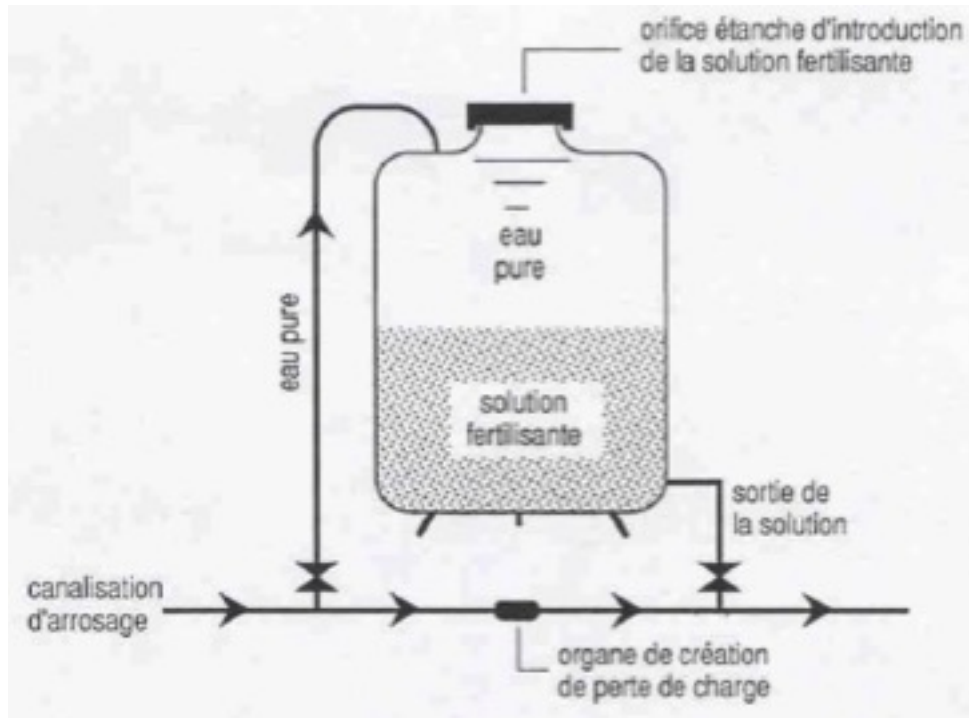

# Influence of orifice diameter on flow variations

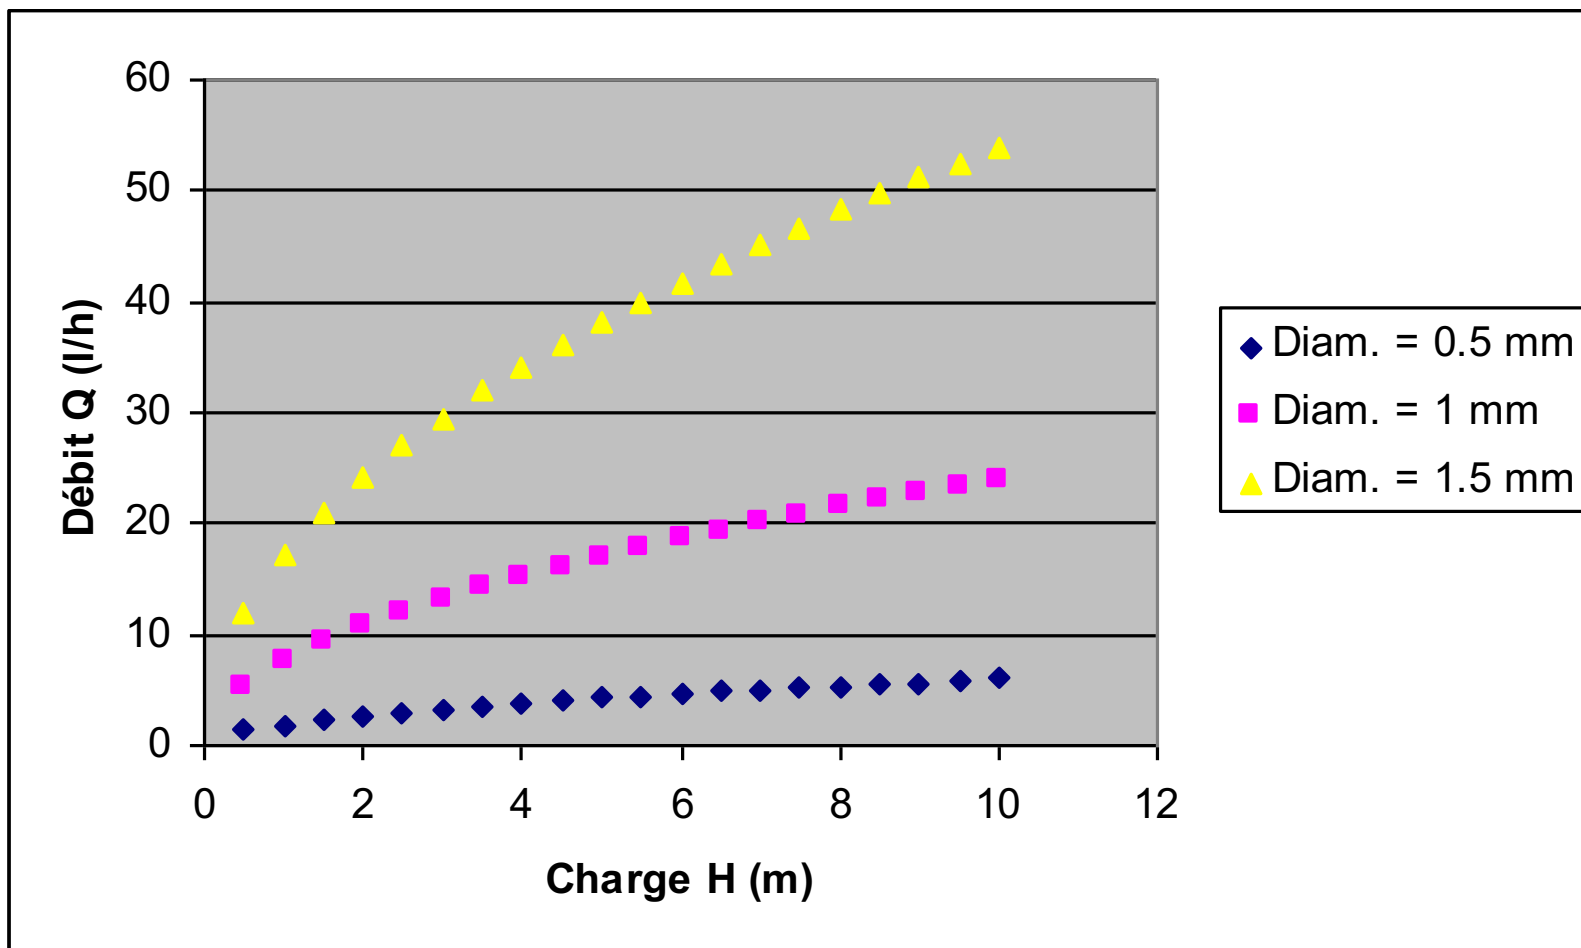

$\beta = 0.5$

$C = 0.6$

# Saturated surface stains under drippers



## Drip irrigation examples

