


Exercise problem 1

You are an engineer working in a biofuel fermentation plant.

Immediately after fermentation and initial processing, you obtain 40% biofuel in water at 60 °C.

You decided to increase the concentration of 100 moles biofuel (liquid) at 60 °C by heating it in a closed vessel at 85 °C. Describe the resulting composition, actual amounts of liquid and vapor phases and enthalpies (per mole as well as total).

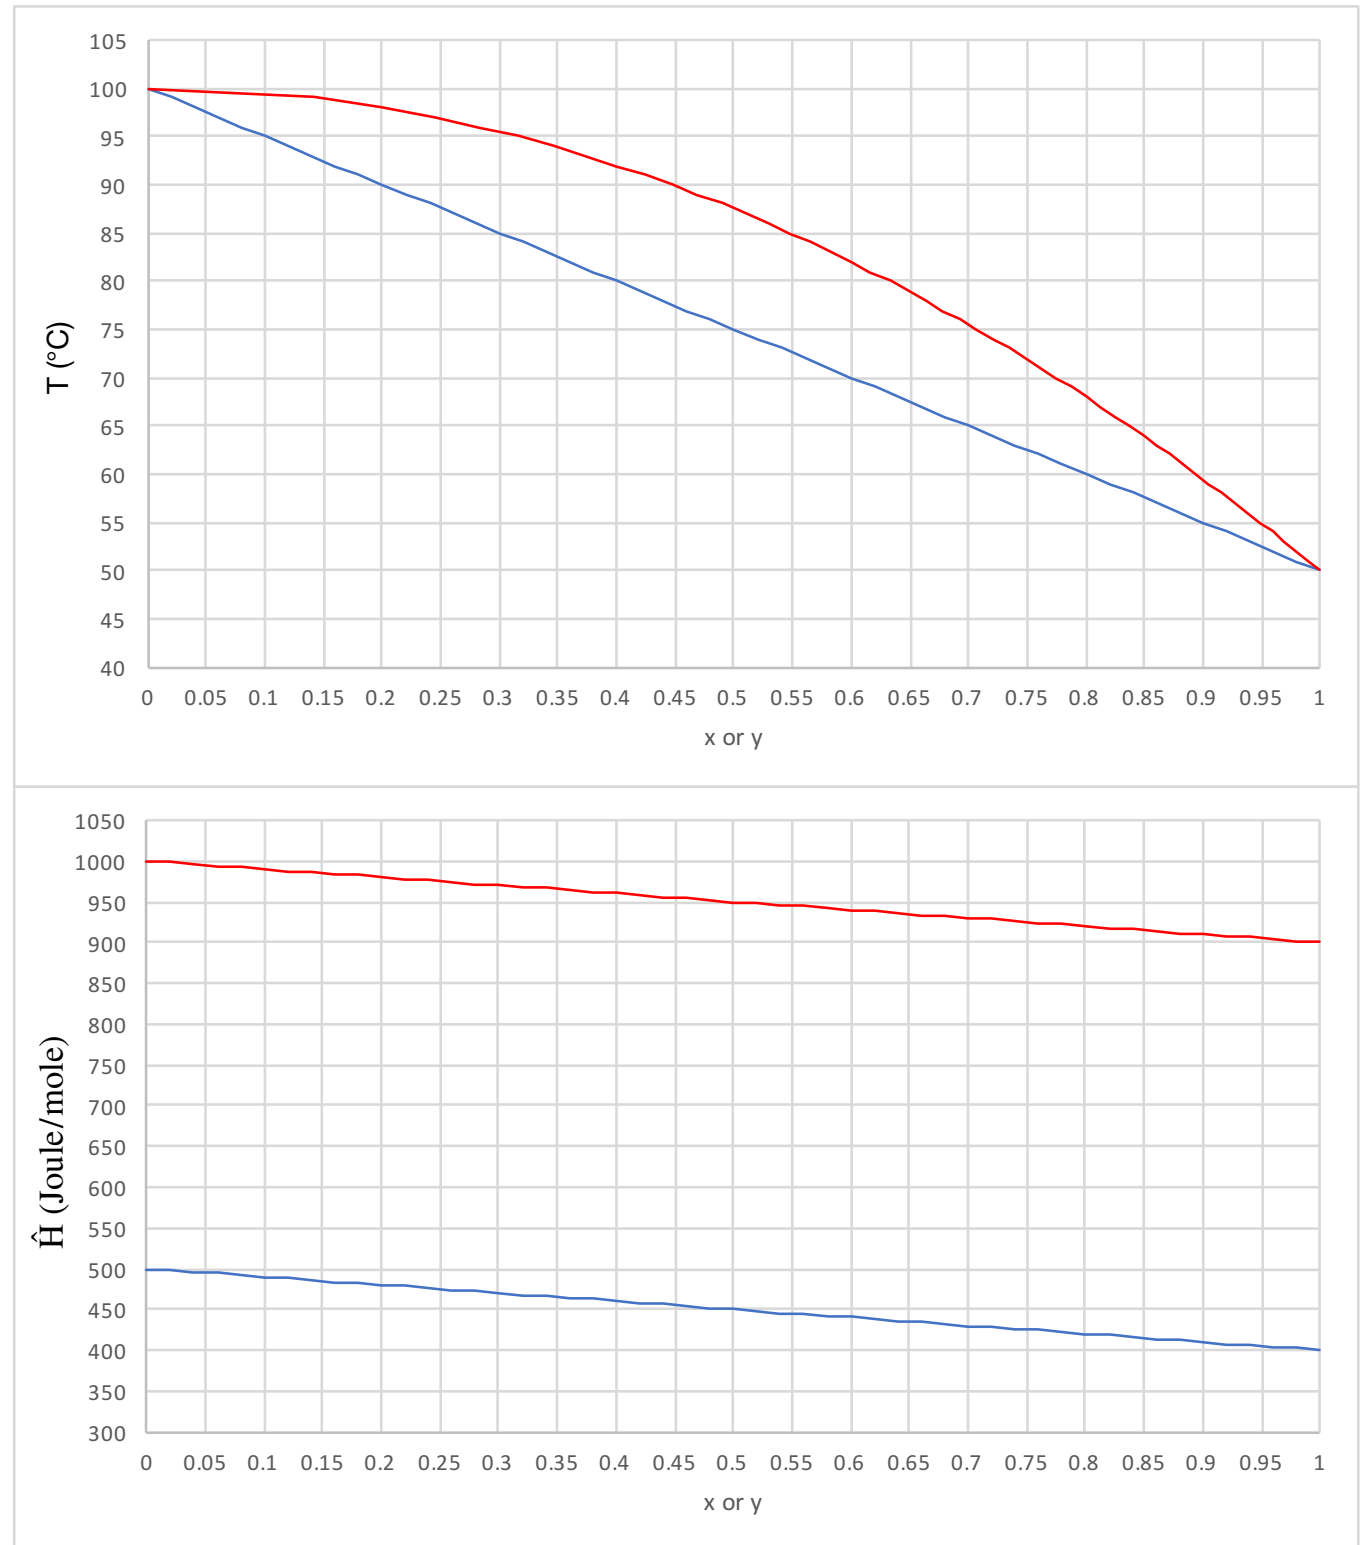


Exercise problem 2: Understanding limitation of flash drum

A flash drum operating is separating an ethanol-propanol mixture. The feed contains $z_1 = 0.4$ ethanol with a flow rate of F . Assume equilibrium relationship $y_1 = k_1 x_1$

Ideally, you will want all ethanol in vapor (ethanol is more volatile) and all propanol in liquid phase (its is less volatile). However, that is not possible with a single flash drum. To maximize separation, you want to maximize concentration of ethanol in vapor and minimize ethanol concentration in liquid

- (a) What is maximum possible composition of ethanol in vapor, y_1 .
- (b) What is the minimum possible composition of ethanol in liquid, x_1 .
- (c) What would be composition of liquid and vapor streams if $V/F = 0.2$

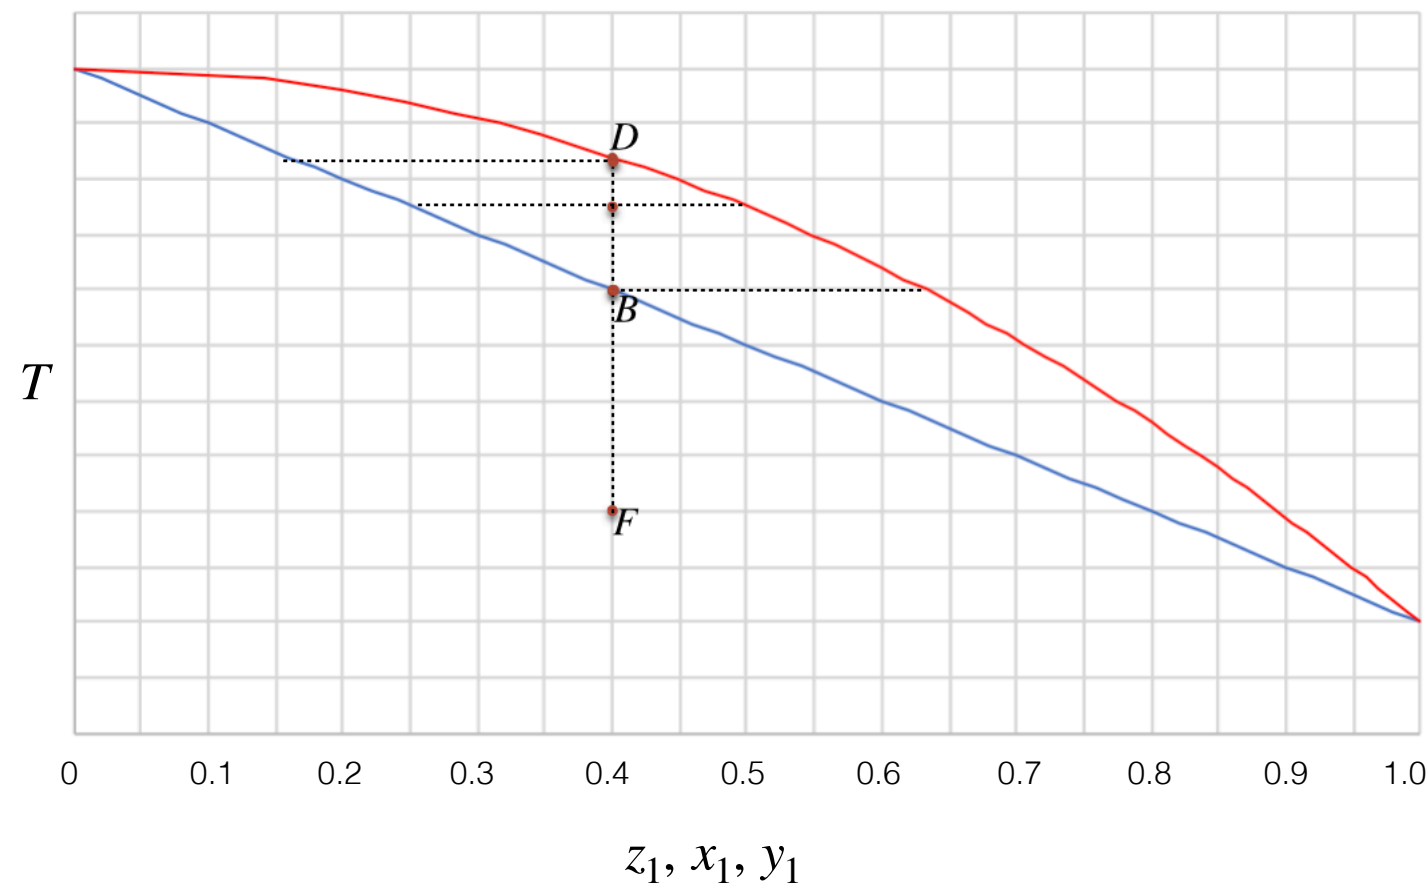

Exercise problem 3:

Consider a mixture of two component liquid mixture (ideal solution; heat of mixing is zero). They are separated in flash column at the following condition.

$$T_{\text{ref}} = T_F = 25\text{C}; \quad T = 75\text{C} \quad x_1 = 0.2, \quad y_1 = 0.6 \quad F = 100 \text{ mole/hr} \quad \frac{V}{F} = 0.2$$

$$\begin{array}{lll} C_{P,1,L} = 100 \text{ J/mol/K} & C_{P,1,V} = 80 \text{ J/mol/K} & h_{1,\text{latent}} = 1000 \text{ J/mol} \\ C_{P,2,L} = 50 \text{ J/mol/K} & C_{P,2,V} = 100 \text{ J/mol/K} & h_{2,\text{latent}} = 1500 \text{ J/mol} \end{array}$$

Find h_F, h_L, h_V , and Q