

## Exercise 9: Limitation of through cracking

### Bessières Bridge kerbs

#### Background and objective

The kerbs of the Bessières Bridge were rehabilitated from May to July 2003 ( $T_{e, \text{ambient}} \sim 22^\circ\text{C}$ ) according to the figure below.

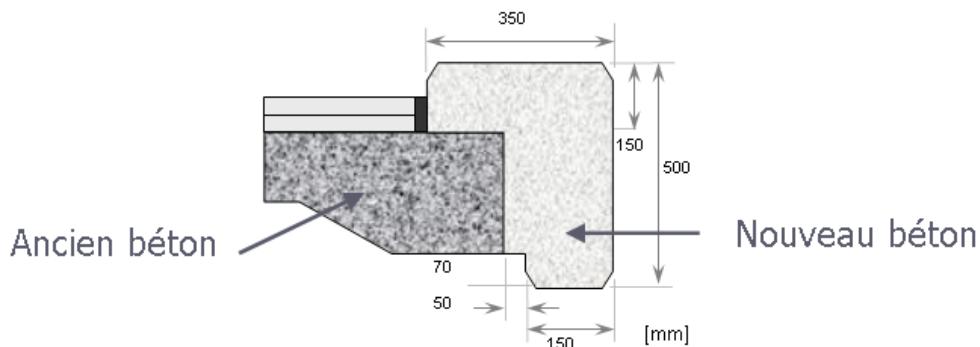


Figure 1: Geometry of the rehabilitated Bessières bridge kerbs.

The aim of this exercise is to study the risk of through cracking of the kerbs of the Bessières Bridge and the impact that cement and temperature have on this risk.

Using the chart below taken from Bernard (2000), answer the following questions.

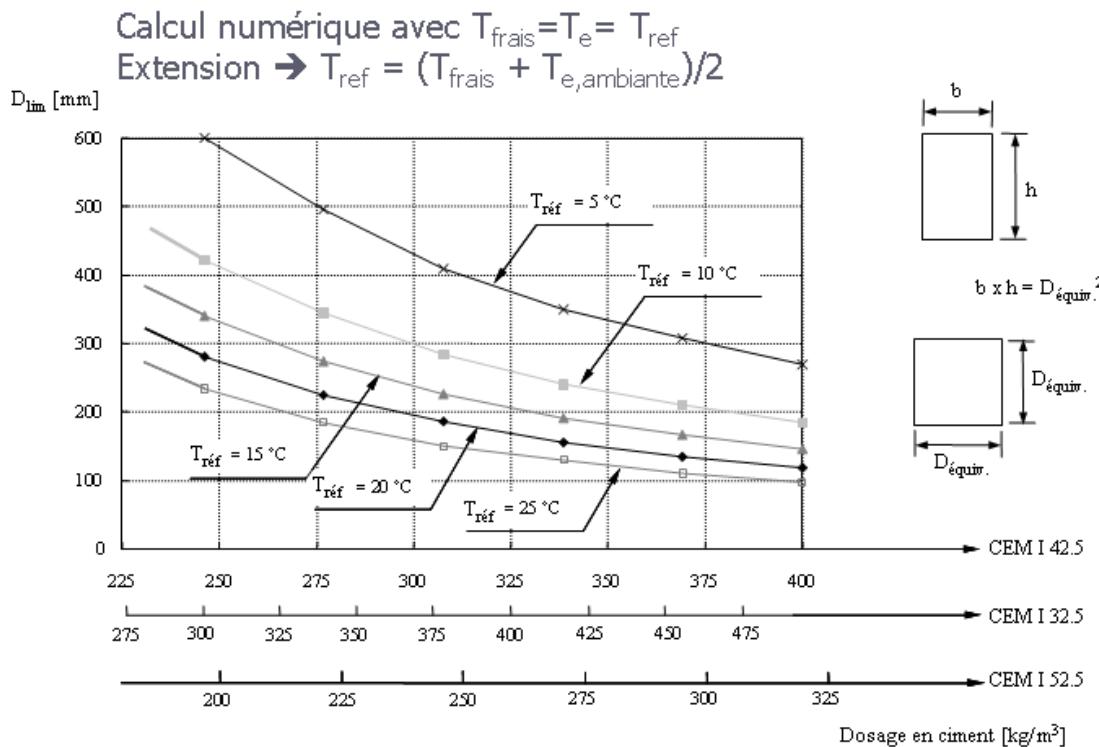


Figure 2: Chart of the dimension of the allowable equivalent section  $D_{\text{lim}}$ .

## **Question 1**

*Determine the equivalent section ( $D_{équ}$ ) for the temperature rise.*

## **Question 2**

*The concrete processing conditions impose a total binder dosage of  $375 \text{ kg/m}^3$ . Check the risk of through cracking of thermal origin with a CEM I 42.5 and a CEM I 32.5, for a fresh concrete temperature of  $T_{fresh}=20^\circ\text{C}$ .*

## **Question 3**

*Is this risk reduced by replacing  $50 \text{ kg/m}^3$  of CEM I 32.5 cement with fly ash (it will be assumed that the heating potential of fly ash is half that of cement)?*

## **Question 4**

*For a concrete with  $325 \text{ kg/m}^3$  of CEM I 32.5 +  $50 \text{ kg/m}^3$  of fly ash, what is the effect of lowering the temperature of the fresh concrete to a)  $8^\circ\text{C}$ , b)  $16^\circ\text{C}$  on the risk of through cracking of thermal origin?*

## **References**

Bernard O., (2000), "Comportement à long terme des éléments de structure formés de bétons d'âges différents", thèse EPFL No. 2283, Lausanne.

ED/ed – 14.11.2024