

## Slope Stability

Alessio FERRARI (AF)

### Exercise 6 - Solution

#### Stability analysis of a dam under different hydraulic boundary conditions.

#### GEOSTUDIO SEEP/W AND GEOSTUDIO SLOPE/W

The goal of this exercise is the assessment of the stability of the upstream slope of a dam in a gradual drawdown condition by adopting the SEEP/W module of the commercial software GeoStudio for solving the hydraulic problem and the SLOPE/W module of the same software for the mechanical problem.

#### 1.1 Exercise description

The dam considered in this exercise is characterized by the geometry and the material properties reported in Figure 1 and Tables 12. The reservoir depth is 12 m. The reservoir is initially full, and a slow drawdown is planned. Seepage from the upstream slope of the dam toward its downstream toe is expected to occur due to the hydraulic boundary conditions. On the downstream toe, there is a drain, for a distance of  $L_1$ , with the purpose of reducing the pore water pressures in the downstream slope and preventing erosion. Table 1 also provides, for each geomaterial, the volumetric saturated water content ( $\theta_{\text{sat}} = V_{w,\text{sat}}/V$  with  $V_{w,\text{sat}}$  volume of water when the soil is saturated and  $V$  total volume), the AEV (air entry value of the soil= negative relative pore water pressure starting from which the degree of saturation decreases) and the saturated hydraulic conductivity  $k_{\text{sat}}$  (=the hydraulic conductivity of the saturated soil).

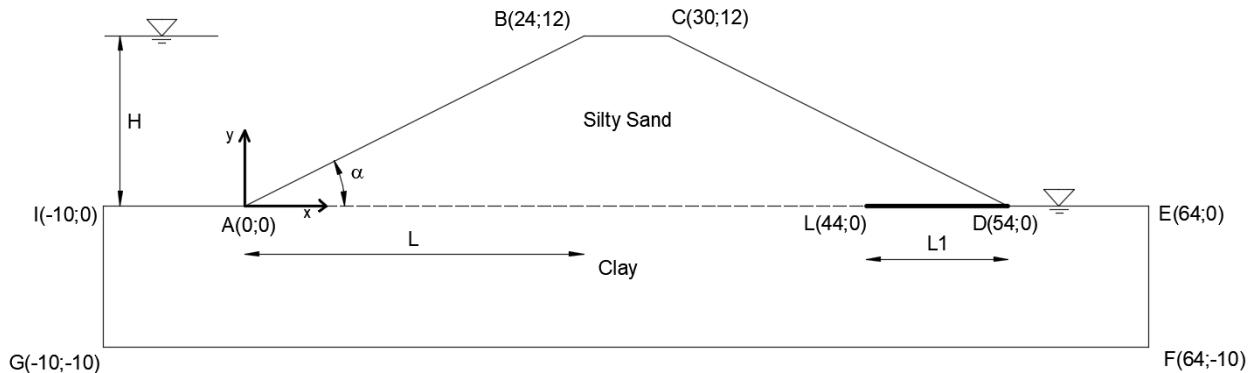


Figure 1: Dam geometry.

Table 1: Soil properties of the dam reported in Figure 1.

Material	$\gamma_{\text{sat}}$ (kN/m <sup>3</sup> )	$\theta_{\text{sat}}$ (-)	AEV(kPa)	$k_{\text{sat}}$ (m/s)	$\phi'$ (°)	$c'$ (kPa)
Silty Sand	20.0	0.35	120	$10^{-7}$	32.0	10.0
Clay	21.0	0.40	1500	$10^{-8}$	23.0	10.0

Table 2: Geometry of the dam given in Figure 1.

$\alpha$ (°)	$H$ (m)	$L$ (m)	$LI$ (m)
27.0	12.0	24.0	10.0


Perform a seepage analysis of the dam in the case of a slow drawdown from 12 m to 0 m. Perform a slope stability analysis according to the Morgenstern-Price method for different levels of drawdown. Consider the soil above the piezometric line as saturated by capillarity and verify the correctness of this assumption by analyzing the pore water pressure values in the domain of interest and comparing them with the air entry value (AEV) provided in Table 1.

Finally, plot the evolution of the safety factor obtained for the different water levels and determine the level to which the minimum value of the safety factor corresponds.

## 1. Results

### 1.1 Seepage analysis

The analysis of the seepage problem performed with GeoStudio SEEP/W module allows obtaining the following results in terms of water pressure for the different water levels:

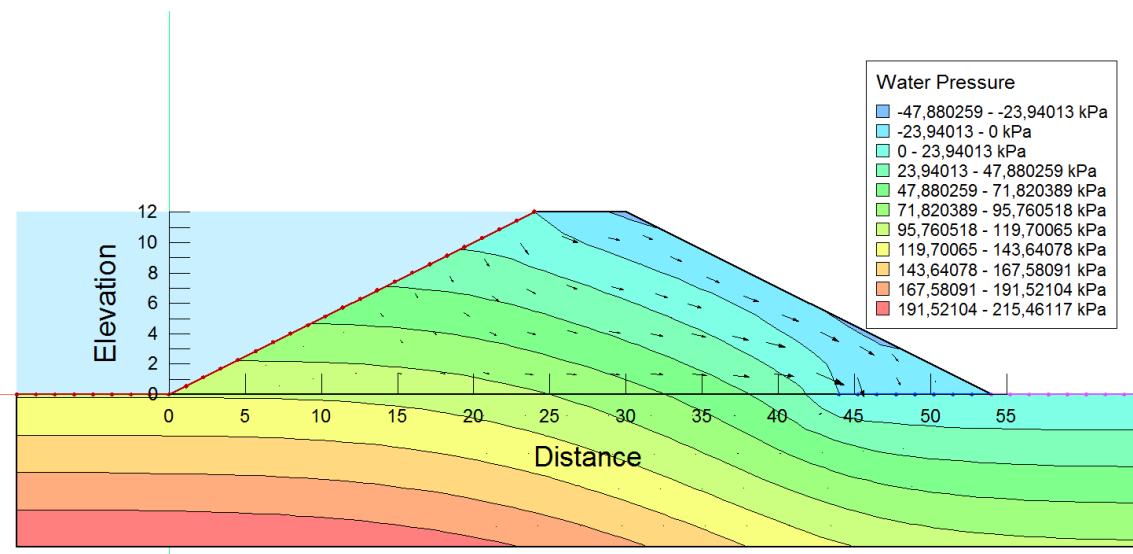Figure 1: Water pressure for  $H= 12\text{m}$ .

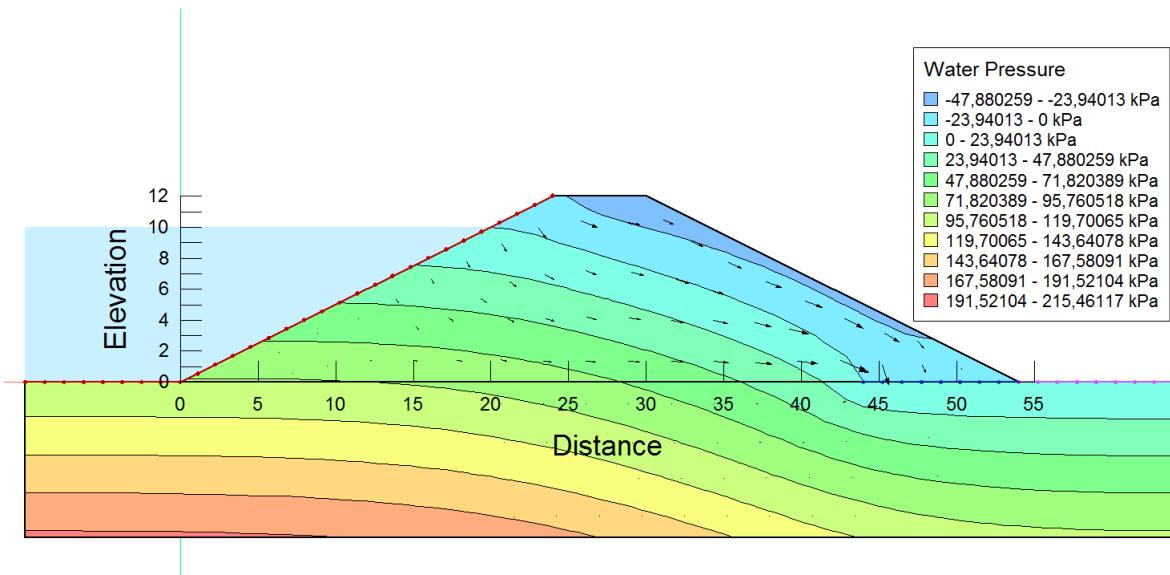


Figure 2: Water pressure for  $H= 10$  m.

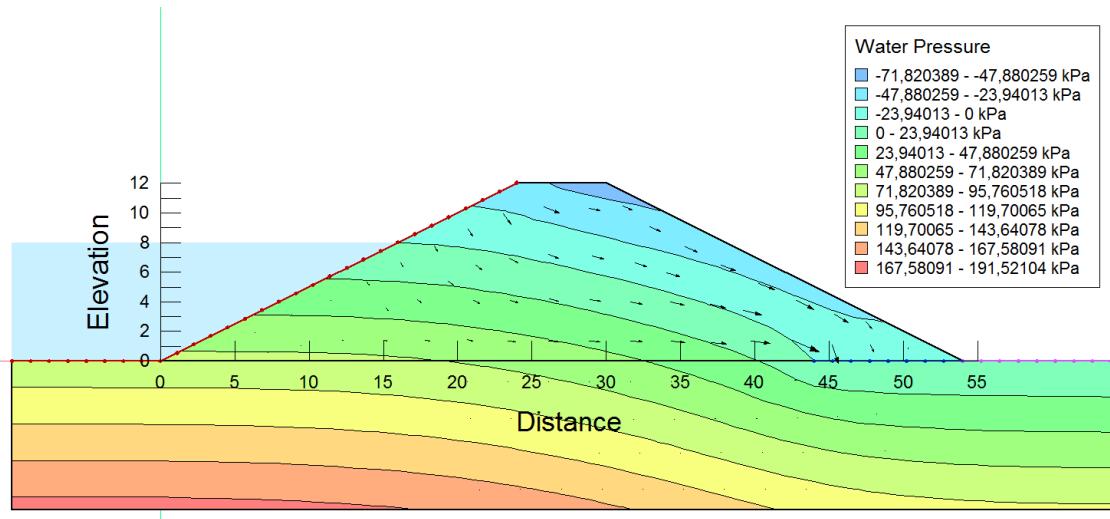


Figure 3: Water pressure for  $H= 8$  m.

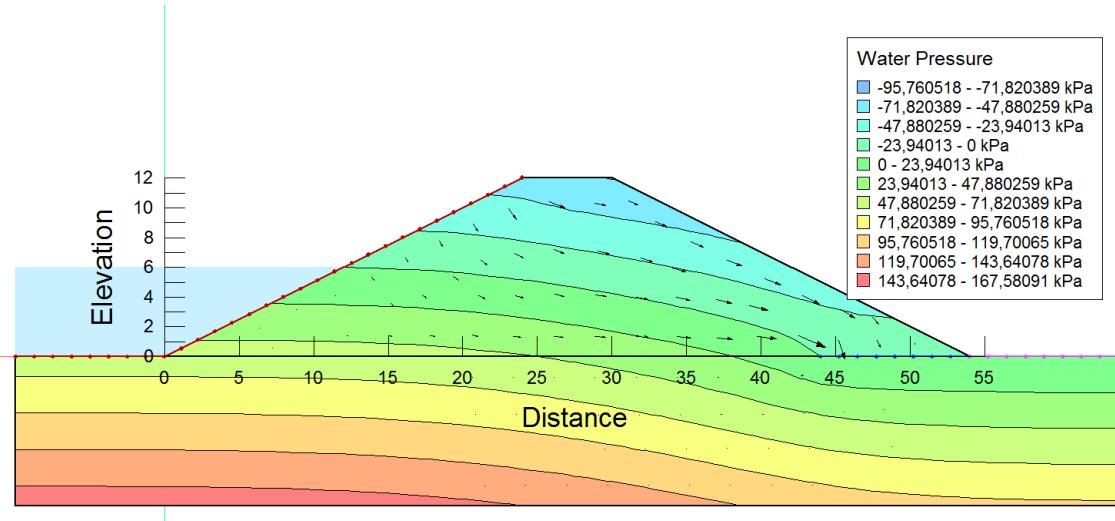


Figure 4: Water pressure for  $H= 6$  m

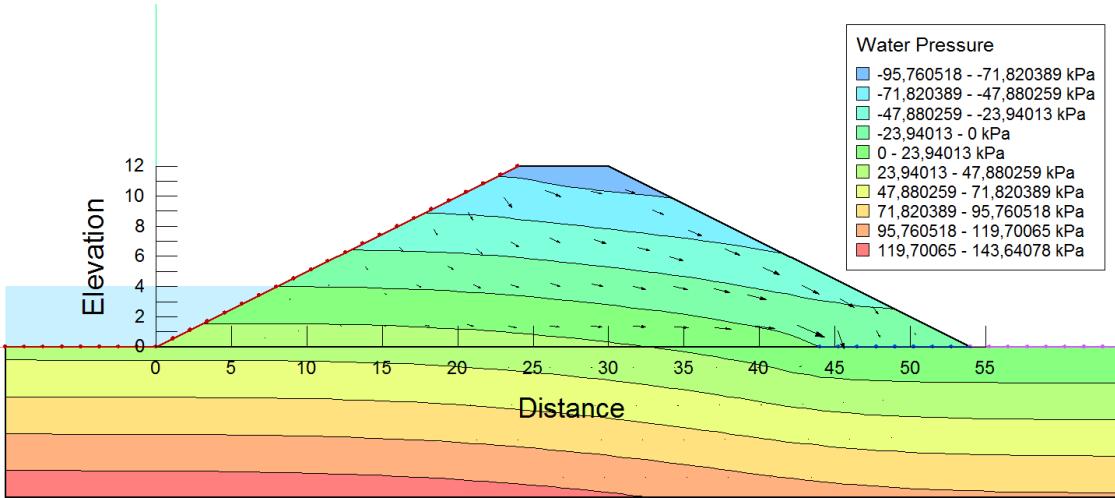


Figure 5: Water pressure for  $H= 4$  m

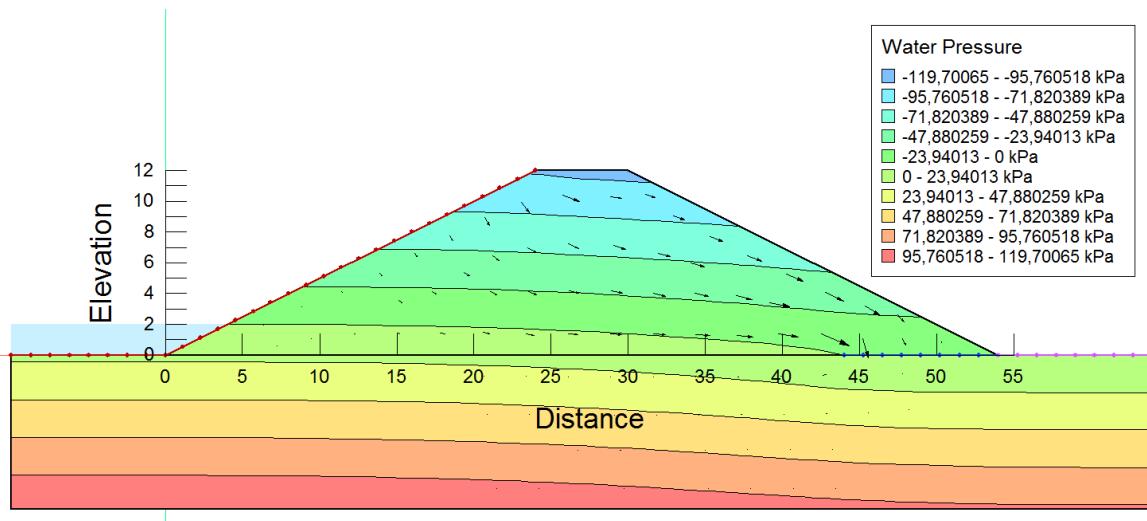


Figure 6: Water pressure for  $H= 2$  m

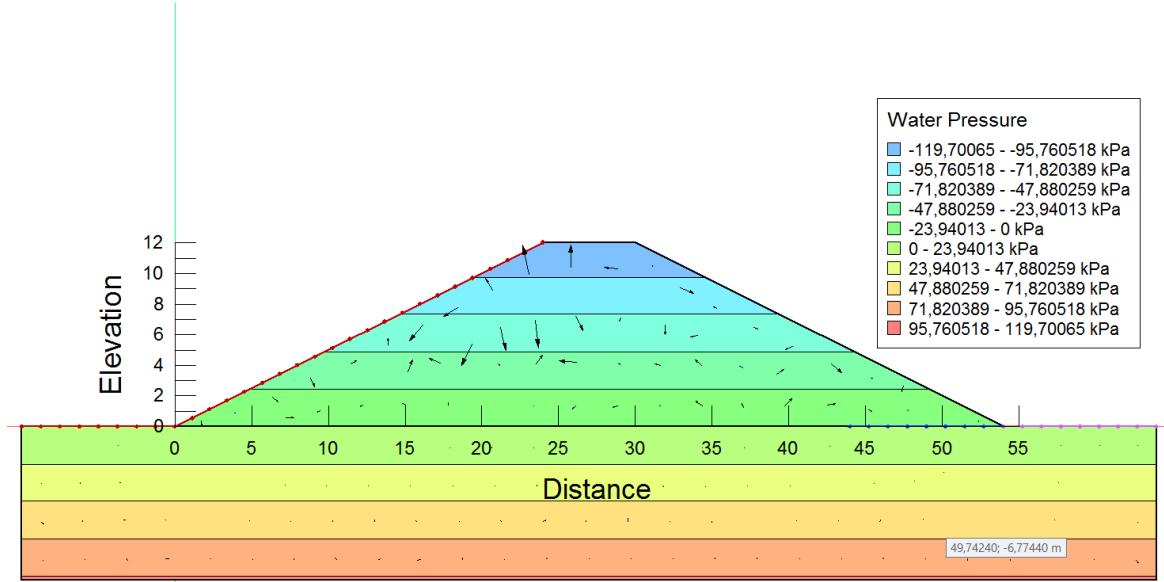


Figure 7: Water pressure for  $H=0$  m.

## 2.2 Slope stability analysis

The slope stability results in terms of safety factor and critical slip surface's characteristics are given in the following table and figure.

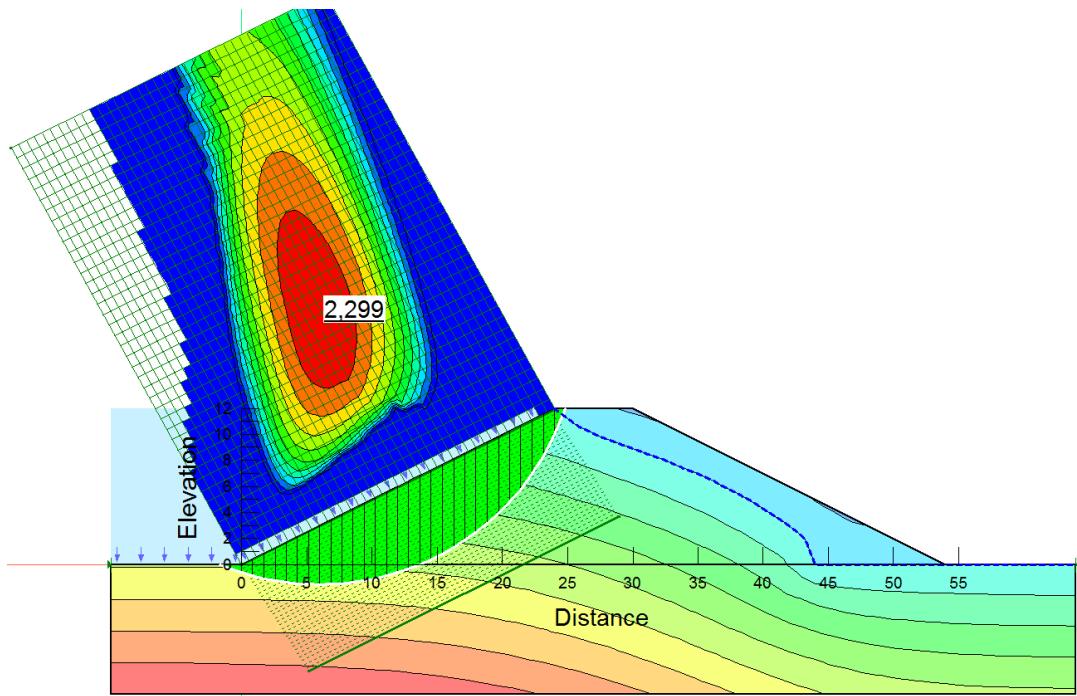


Figure 8: Safety factor  $H=12$  m.

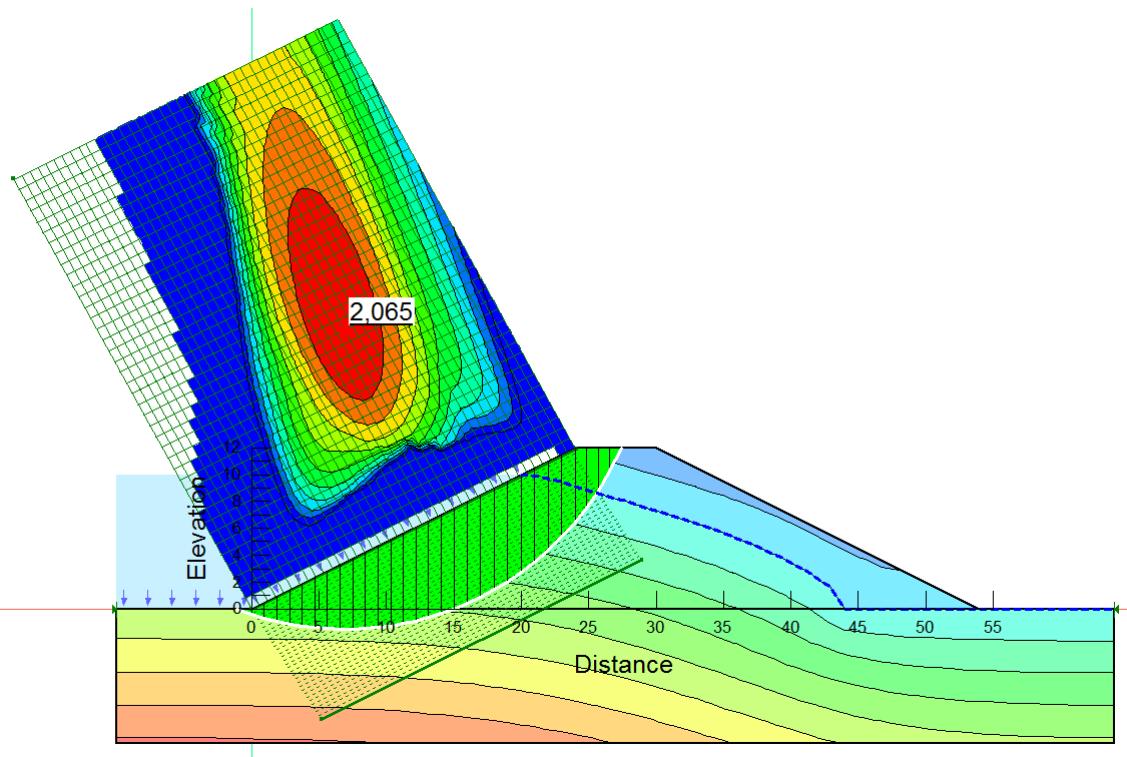


Figure 9: Safety factor  $H=10$  m.

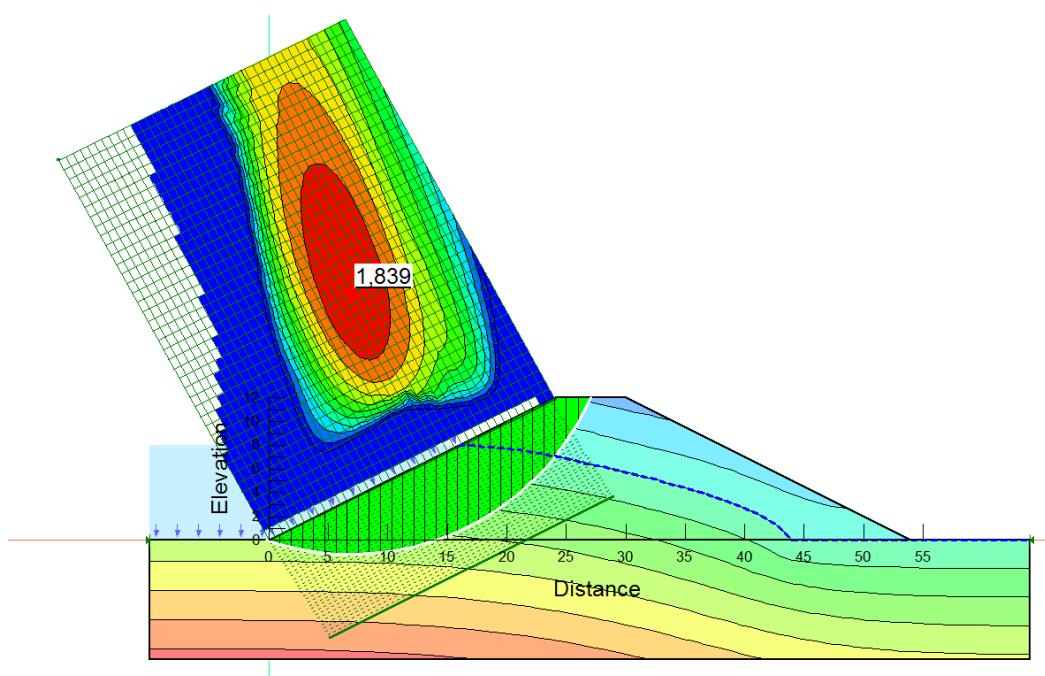


Figure 10: Safety factor  $H=8$  m.

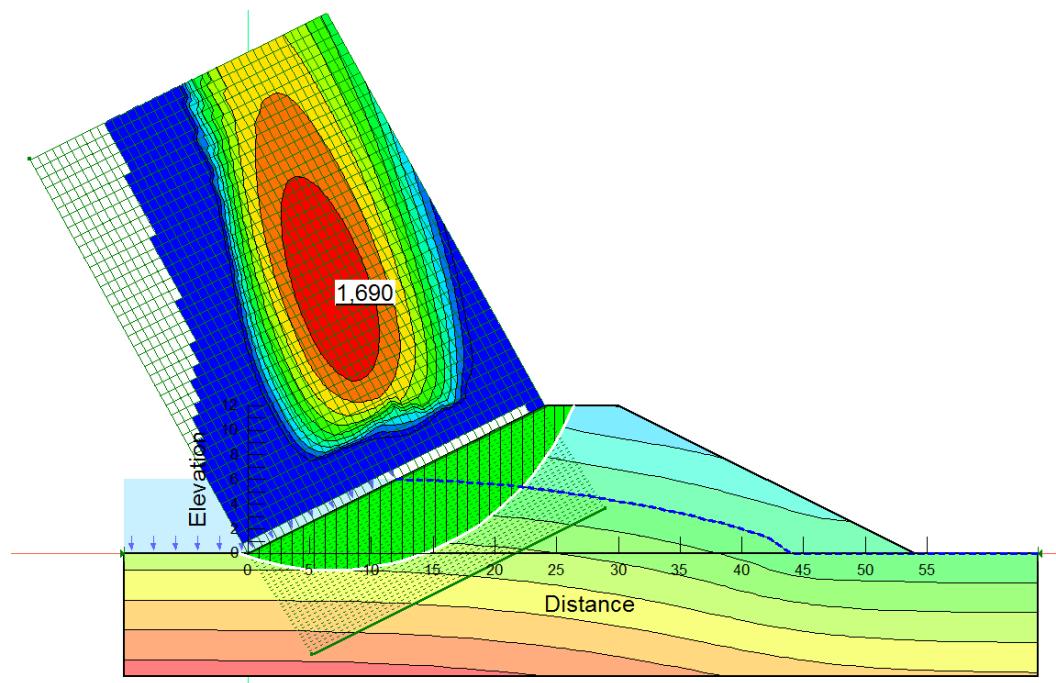


Figure 11: Safety factor H=6 m.

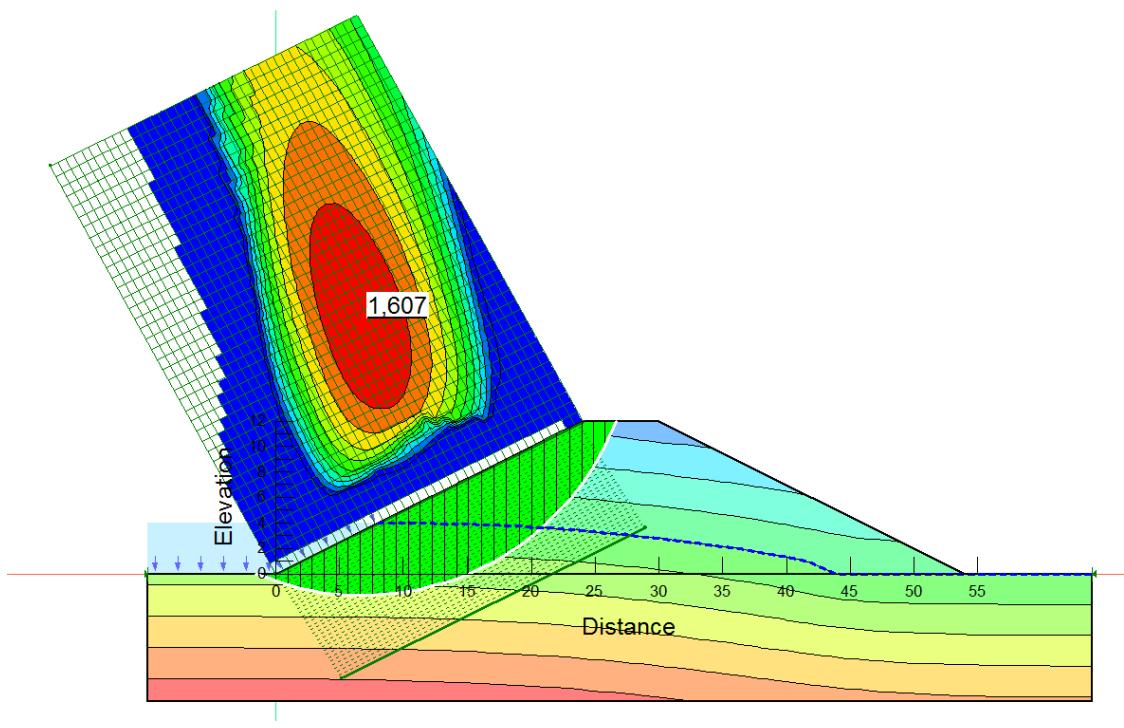


Figure 13: Safety factor H=4 m.

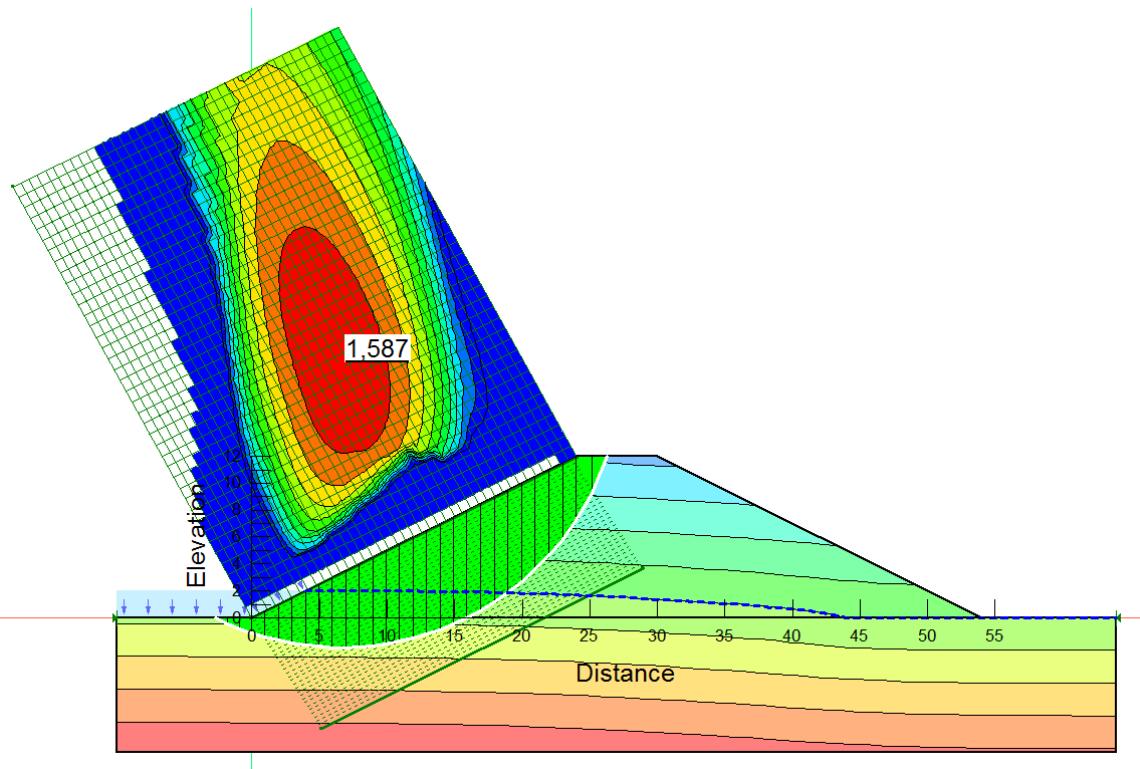


Figure 14: Safety factor  $H=2\text{m}$ .


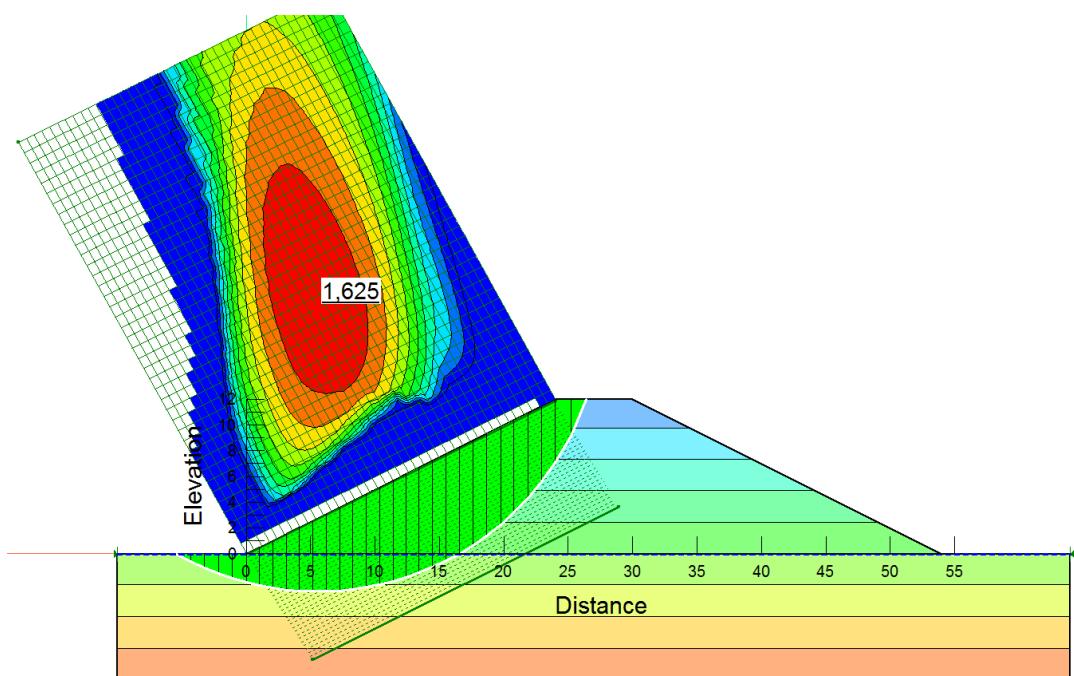


Figure 15: Safety factor for  $H=0\text{ m}$ .

<b>H [m]</b>	<b>F</b>
12	2.30
10	2.06
8	1.84
6	1.69
4	1.60
2	1.59
0	1.63

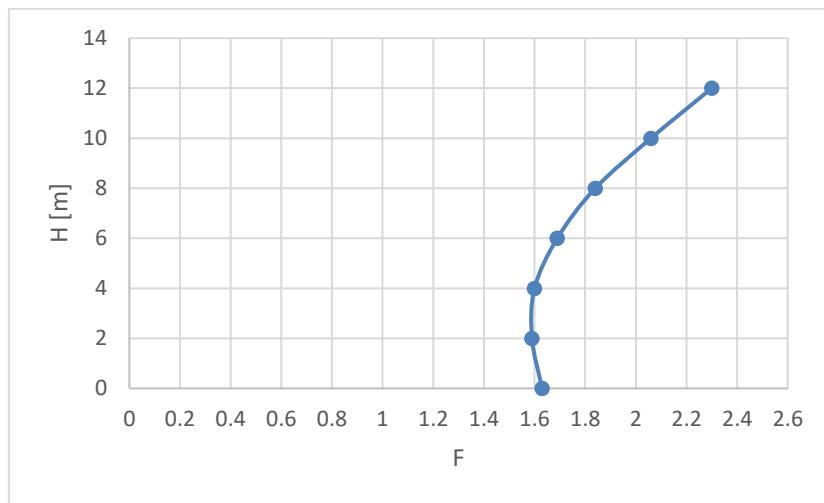

The minimum value of F is 1.59 and corresponds to the water level of 2 m.