

Thermal Bridges in Building Construction — 2D Composite Structure

Introduction

The European standard EN ISO 10211:2007 for thermal bridges in building constructions provides four test cases — two 2D and two 3D — for validating a numerical method (Ref. 1). If the values obtained by a method conform to the results of all these four cases, the method is classified as a *three-dimensional steady-state high precision method*.

COMSOL Multiphysics successfully passes all the test cases described by the standard. This document presents an implementation of the second 2D model (Case 2).

The example studies the temperature distribution and heat flux through a two-dimensional cross-section of an insulating wall. Table 1 and Table 2 compare the numerical results with the target solution provided by the standard.

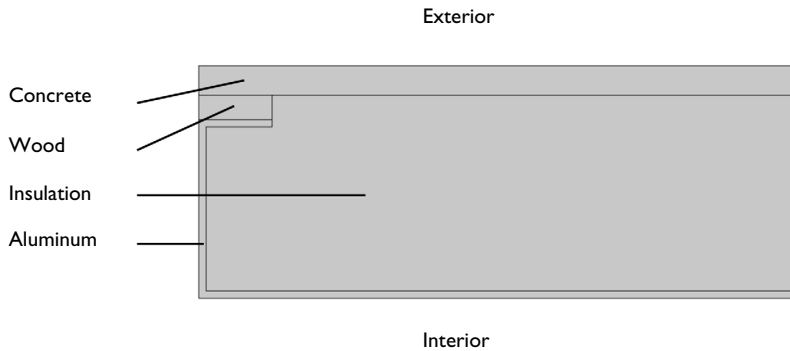


Figure 1: Geometry and material distribution of ISO 10211:2007 test case 2.

Model Definition

Figure 1 shows the geometry and material distribution. Four materials with distinct thermal conductivities are used in the structure: a concrete layer on the top side, an aluminum layer on the left and bottom sides, an insulation material layer occupying the largest space in the structure, and a wooden batten between the aluminum and concrete layers.

The left and right boundaries are thermally insulated. The top and bottom boundaries, corresponding to cold exterior and hot interior sides, are subject to convective heat flux. The exterior temperature is 0 °C while interior temperature is 20 °C. The ISO

10211:2007 standard specifies the values of the thermal resistance, R , which is related to the heat transfer coefficient, h , according to

$$h = \frac{1}{R}$$

Results and Discussion

The temperature profile in [Figure 2](#) shows the effects of the highly conductive aluminum layer on the left side.

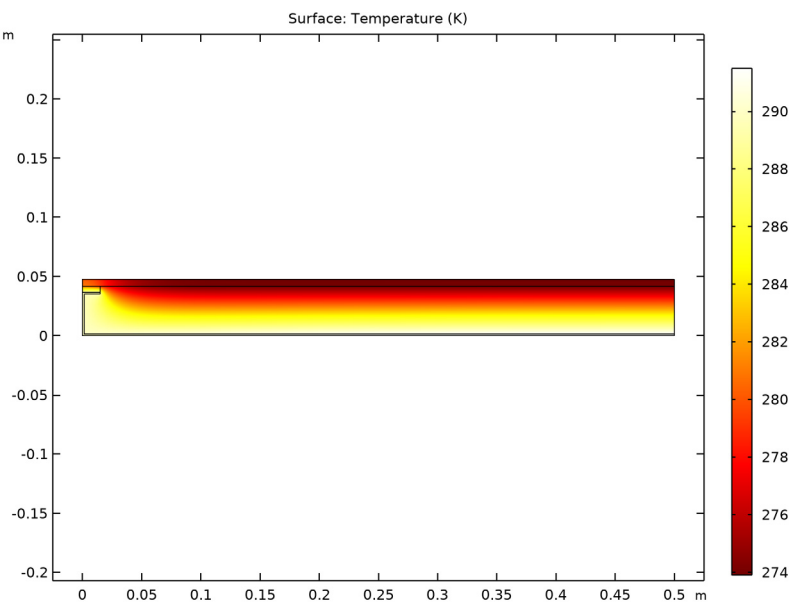


Figure 2: Temperature distribution of ISO 10211:2007 test case 2.

The numerical results of the COMSOL Multiphysics simulation are compared with the expected values provided by EN ISO 10211:2007 ([Ref. 1](#)). [Table 1](#) shows the comparison for the total heat flux and [Table 2](#) compares temperature at nine particular points.

TABLE 1: COMPARISON BETWEEN EXPECTED VALUES AND COMPUTED VALUES (TOTAL HEAT FLUX).

EXPECTED VALUE	COMPUTED VALUE	DIFFERENCE
9.5 W/m	9.49 W/m	0.08%

TABLE 2: COMPARISON BETWEEN EXPECTED VALUES AND COMPUTED VALUES (TEMPERATURE).

(X,Y) COORD. (MM)	EXPECTED VALUE (°C)	COMPUTED VALUE (°C)	DIFF. (°C)	(X,Y) COORD. (MM)	EXPECTED VALUE (°C)	COMPUTED VALUE (°C)	DIFF. (°C)
(0, 47.5)	7.1	7.07	0.03	(15, 41.5)	6.3	6.27	0.03
(0, 41.5)	7.9	7.90	0.00	(15, 36.5)	16.3	16.33	0.03
(0, 36.5)	16.4	16.41	0.01	(500, 47.5)	0.8	0.76	0.04
(0, 0)	16.8	16.77	0.03	(500, 41.5)	0.8	0.83	0.03
				(500, 0)	18.3	18.33	0.03

The maximum permissible differences to pass this case validation, 0.1 °C for temperature and 0.1% for total heat flux, are respected.

Reference

1. European Committee for Standardization, *EN ISO 10211, Thermal bridges in building construction – Heat flows and surface temperatures – Detailed calculations (ISO 10211:2007)*, Appendix A, pp. 30–36, 2007.

Application Library path: Heat_Transfer_Module/
Buildings_and_Constructions/thermal_bridge_2d_composite_structure

Modeling Instructions

From the **File** menu, choose **New**.

NEW

In the **New** window, click  **Model Wizard**.

MODEL WIZARD

- 1 In the **Model Wizard** window, click  **2D**.
- 2 In the **Select Physics** tree, select **Heat Transfer>Heat Transfer in Solids (ht)**.
- 3 Click **Add**.
- 4 Click  **Study**.
- 5 In the **Select Study** tree, select **General Studies>Stationary**.
- 6 Click  **Done**.

GLOBAL DEFINITIONS

Parameters 1

Define the parameters necessary to build the geometry.

- 1 In the **Model Builder** window, under **Global Definitions** click **Parameters 1**.
- 2 In the **Settings** window for **Parameters**, locate the **Parameters** section.
- 3 In the table, enter the following settings:

Name	Expression	Value	Description
W	0.5[m]	0.5 m	Structure width
w	15[mm]	0.015 m	Short width for wood and aluminum domains
h1	6[mm]	0.006 m	Concrete domain height
h2	5[mm]	0.005 m	Wood domain height
h3	41.5[mm]	0.0415 m	Insulation domain height
h4	h3-h2	0.0365 m	Aluminum domain height
t4	1.5[mm]	0.0015 m	Aluminum domain thickness

GEOMETRY 1

Rectangle 1 (r1)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type W.
- 4 In the **Height** text field, type h3+h1.
- 5 Click to expand the **Layers** section. In the table, enter the following settings:

Layer name	Thickness (m)
Layer 1	h3

- 6 Click  **Build Selected**.

This two-layered rectangle corresponds to the insulation and concrete layers. Continue with the aluminum layer, which consists of three rectangles.

Rectangle 2 (r2)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.

- 3 In the **Width** text field, type W.
- 4 In the **Height** text field, type t4.
- 5 Click  **Build Selected**.

Rectangle 3 (r3)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type t4.
- 4 In the **Height** text field, type h4.
- 5 Click  **Build Selected**.

Rectangle 4 (r4)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type w.
- 4 In the **Height** text field, type t4.
- 5 Locate the **Position** section. In the **y** text field, type h4 - t4.
- 6 Click  **Build Selected**.

Union 1 (un1)


- 1 In the **Geometry** toolbar, click  **Booleans and Partitions** and choose **Union**.
- 2 In the **Settings** window for **Union**, locate the **Union** section.
- 3 Clear the **Keep interior boundaries** check box.
- 4 Click  **Clear Selection**.
- 5 Select the objects **r2**, **r3**, and **r4** only.
- 6 Click  **Build Selected**.

Add a rectangle for the wooden batten.

Rectangle 5 (r5)

- 1 In the **Geometry** toolbar, click  **Rectangle**.
- 2 In the **Settings** window for **Rectangle**, locate the **Size and Shape** section.
- 3 In the **Width** text field, type w.
- 4 In the **Height** text field, type h2.
- 5 Locate the **Position** section. In the **y** text field, type h4.

6 Click  **Build All Objects**.

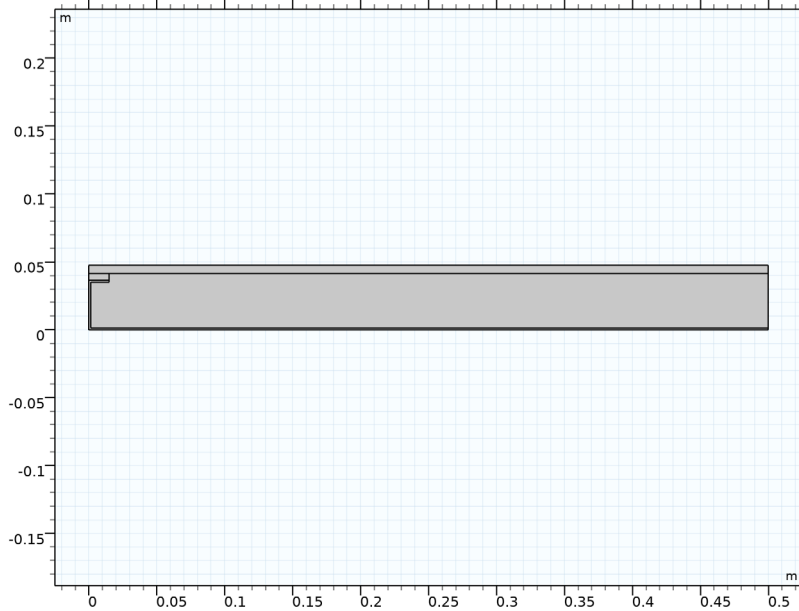

MATERIALS

Concrete

- 1 In the **Materials** toolbar, click  **Blank Material**.
- 2 In the **Settings** window for **Material**, type Concrete in the **Label** text field.
- 3 Select Domain 3 only.
- 4 Locate the **Material Contents** section. In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Thermal conductivity	k_{iso} ; $k_{ii} = k_{iso}$, $k_{ij} = 0$	1.15	W/(m·K)	Basic
Density	ρ	2300	kg/m ³	Basic
Heat capacity at constant pressure	C_p	880	J/(kg·K)	Basic

Wood

- 1 In the **Materials** toolbar, click  **Blank Material**.
- 2 In the **Settings** window for **Material**, type Wood in the **Label** text field.

3 Select Domain 2 only.

4 Locate the **Material Contents** section. In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Thermal conductivity	k_{iso} ; $k_{ii} = k_{iso}$, $k_{ij} = 0$	0.12	W/(m·K)	Basic
Density	ρ	500	kg/m ³	Basic
Heat capacity at constant pressure	C_p	2500	J/(kg·K)	Basic

Insulation

1 In the **Materials** toolbar, click  **Blank Material**.

2 In the **Settings** window for **Material**, type Insulation in the **Label** text field.

3 Select Domain 4 only.

4 Locate the **Material Contents** section. In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Thermal conductivity	k_{iso} ; $k_{ii} = k_{iso}$, $k_{ij} = 0$	0.029	W/(m·K)	Basic
Density	ρ	150	kg/m ³	Basic
Heat capacity at constant pressure	C_p	1000	J/(kg·K)	Basic

Aluminum

1 In the **Materials** toolbar, click  **Blank Material**.

2 In the **Settings** window for **Material**, type Aluminum in the **Label** text field.

3 Select Domain 1 only.

4 Locate the **Material Contents** section. In the table, enter the following settings:

Property	Variable	Value	Unit	Property group
Thermal conductivity	k_{iso} ; $k_{ii} = k_{iso}$, $k_{ij} = 0$	230	W/(m·K)	Basic
Density	ρ	2700	kg/m ³	Basic
Heat capacity at constant pressure	C_p	900	J/(kg·K)	Basic

HEAT TRANSFER IN SOLIDS (HT)

Heat Flux 1

- 1 In the **Model Builder** window, under **Component 1 (comp1)** right-click **Heat Transfer in Solids (ht)** and choose **Heat Flux**.
- 2 Select Boundaries 2 and 10 only.
- 3 In the **Settings** window for **Heat Flux**, locate the **Heat Flux** section.
- 4 Click the **Convective heat flux** button.
- 5 In the h text field, type 1/0.11.
- 6 In the T_{ext} text field, type 20[degC].

Heat Flux 2

- 1 In the **Physics** toolbar, click  **Boundaries** and choose **Heat Flux**.
- 2 Select Boundary 9 only.
- 3 In the **Settings** window for **Heat Flux**, locate the **Heat Flux** section.
- 4 Click the **Convective heat flux** button.
- 5 In the h text field, type 1/0.06.
- 6 In the T_{ext} text field, type 0[degC].

STUDY 1

In the **Home** toolbar, click  **Compute**.

RESULTS

Temperature (ht)

The first default plot shows the temperature distribution (Figure 2).

- 1 Click the  **Zoom Extents** button in the **Graphics** toolbar.

Isothermal Contours (ht)

The second default plot shows isothermal contours in the structure.

Follow the steps below to compute the heat flux given in Table 1.

Line Integration 1

- 1 In the **Results** toolbar, click  **More Derived Values** and choose **Integration> Line Integration**.
- 2 Select Boundaries 2 and 10 only.

3 In the **Settings** window for **Line Integration**, click **Replace Expression** in the upper-right corner of the **Expressions** section. From the menu, choose **Component 1 (comp1)>Heat Transfer in Solids>Boundary fluxes>ht.q0 - Inward heat flux - W/m²**.

4 Click  **Evaluate**.

Finally, export the temperature values at the points given in [Table 2](#) to compare the results with the expected values.

Data 1

1 In the **Results** toolbar, click  **Data** and choose **Data**.

2 In the **Settings** window for **Data**, locate the **Expressions** section.

3 In the table, enter the following settings:

Expression	Unit	Description
T	degC	Temperature

4 Locate the **Output** section. Click **Browse**.

5 Browse to a suitable folder, enter the filename `thermal_bridge_2d_composite_structure_result.txt`, and then click **Save**.

6 From the **Points to evaluate in** list, choose **Grid**.

7 In the **X** text field, type 0,w,W.

8 In the **Y** text field, type 0,h4,h4+h2,h4+h2+h1.

9 Click **Export**.